


ENERGIZER NO. L522MJ




THIS BATTERY HAS UNDERWRITERS
LABORATORIES COMPONENT RECOGNITION

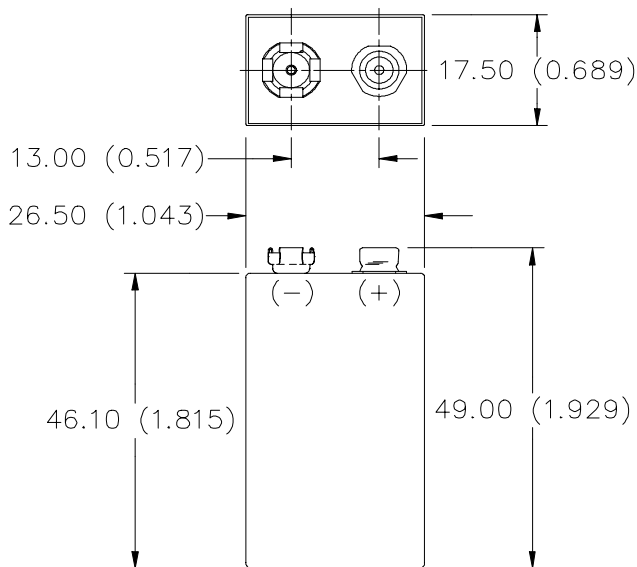


Chemical System:	Lithium Lithium/Manganese Dioxide (Li/MnO ₂)
Designation:	ANSI / NEDA - 1604LC
Battery Voltage:	9.0 Volts
Average Weight:	36.4 grams (1.3 oz.)
Volume:	22.6 cubic centimeters (1.32 cubic inch)
Average Capacity:	1200 mAh to 5.4 volts (Rated Capacity at 900 ohms at 21°C)
Temp Range:	Storage -40°C to 60°C (-40°F to 140°F) Operating -40°C to 60°C (-40°F to 140°F)
Max Discharge:	120 mA continuous
Lithium Content:	1.3 grams (0.4 grams / cell)
Jacket:	Aluminum / Mylar Label
Transportation:	Non-hazardous (49CFR173, 185)
Disposal:	Non-hazardous waste

TYPICAL CONTINUOUS DISCHARGE CAPACITY

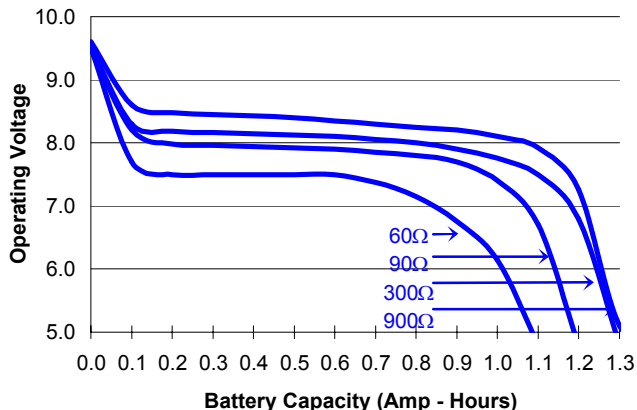

TYPICAL DISCHARGE VS. TEMPERATURE

900Ω Continuous Discharge

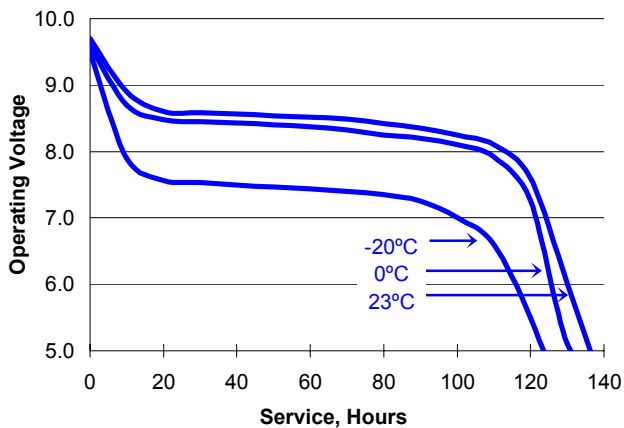

TYPICAL CONTINUOUS DISCHARGE

300Ω (27 mA) @ 21°C

