



FEMALE

Specifications

Technical drawing of a rectangular connector. The drawing shows a top view of the component with various dimensions and features:

- Overall width: 69.32
- Overall height: 63.50
- Width of the central pin area: 55.42
- Width of the top flange: 2.84
- Width of the bottom flange: 7.9
- Distance from the top edge to the center of the top pin: 10°
- Distance from the bottom edge to the center of the bottom pin: 2.77
- Distance from the left edge to the center of the left pin: 12.55
- Distance from the left edge to the center of the right pin: 7.9
- Distance from the left edge to the center of the bottom pin: 3.05

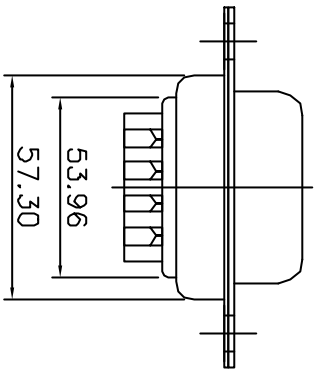

Drawing number	Contact plating
L77SDC37S	Gold flash
L177SDC37S	15μ inches
L77SDC37SC309	30μ inches

TOLERANCE mm				APPROVALS		DATE		TITLE	
X.		±0.05				GDU		06/03/06	
X.X		±0.1				JF.L		06/03/06	
X.XX		±0.3				JF.L		06/03/06	
						SD SERIES D-SUB CONNECTORS SOLDER CUP SOCKET			
UNIT :		MM		SIZE: A4					
DRAWING N°		L-77SDC37S----		REV: A					
Scale N.A.				Sheet 1 of 1					