

LM1770 Evaluation Board

National Semiconductor
Application Note 1400
Chance Dunlap
September 2005



LM1770 Evaluation Board


Introduction

The LM1770 is a synchronous buck switching controller that is capable of accepting an input voltage in the range of 2.8V to 5.5V and producing an output voltage as low as 0.8V. By utilizing a constant on time control scheme it allows a power supply to be designed quickly without the need for external compensation components. The LM1770 is available in three different timing options to allow flexibility on switching frequency and is offered in a small SOT23-5 package. These features enable a power supply to be designed that occupies an extremely small footprint while maintaining high efficiency.

The LM1770 demoboard was designed to illustrate what is possible when designing in space critical applications. It accepts a 5V input rail and produces a 2.5V output. Despite the small size (the board measures 0.7" v 0.68"), it is capable of delivering up to a maximum continuous current of 2A. At this load the efficiency is above 92%.

For testing of the board the input voltage can be varied over the entire operating range of 2.8V to 5.5V. The timing option used for this design is the 2000ns option (LM1770U), which sets the nominal switching frequency to 378kHz. Modifications can easily be made to the board to adjust the output voltage, by changing one of the feedback resistors.

Schematic

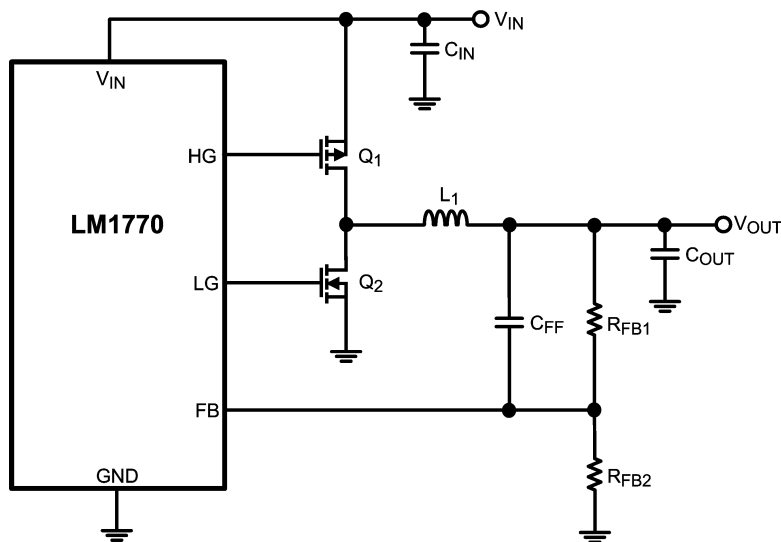


20167001

Bill of Materials

Designator	Description	Part #	Quantity	Manufacturer
U1	LM1770, 2000ns Option	LM1770UMF	1	NSC
Q2	NMOS	SI3460DV	1	Siliconix
Q1	PMOS	SI3867DV	1	Siliconix
Cout	47μF Cap, 4V, 70mOhm, B Case	4TPC47M	1	Sanyo
Rfb1	21kΩ Resistor, 0603	CRCW06032102F	1	Vishay
Rfb2	10kΩ Resistor, 0603	CRCW06031002	1	Vishay
L	5.0μH Inductor	MSS7341-502NLB	1	Coilcraft
Cff	10nF Capacitor, 0603	VJ0603Y103KXAAT	1	Vishay
Cin	22μF Capacitor, 0805	GRM21BR60J226ME39B	1	muRata
Test Points	Individual test points	160-1026-02-05-00	3	Wearnes


AN-1400

Performance

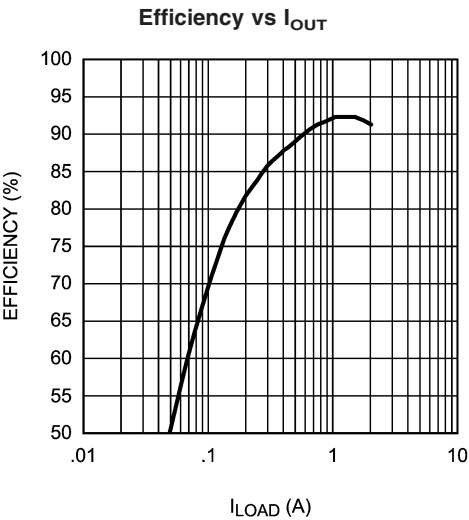


20167002

PCB Layout

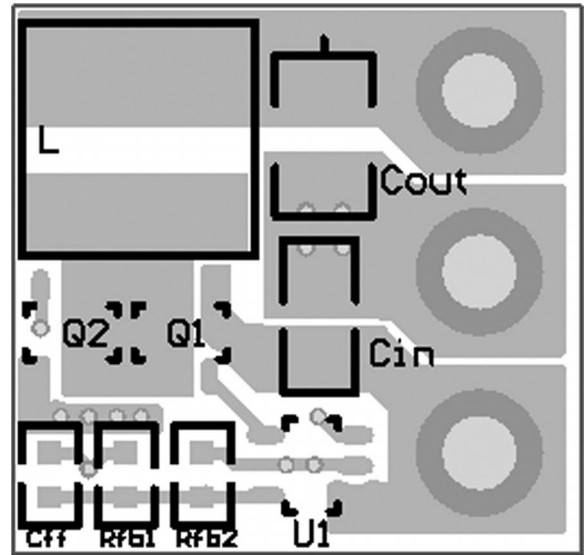

20167003

Top Layer

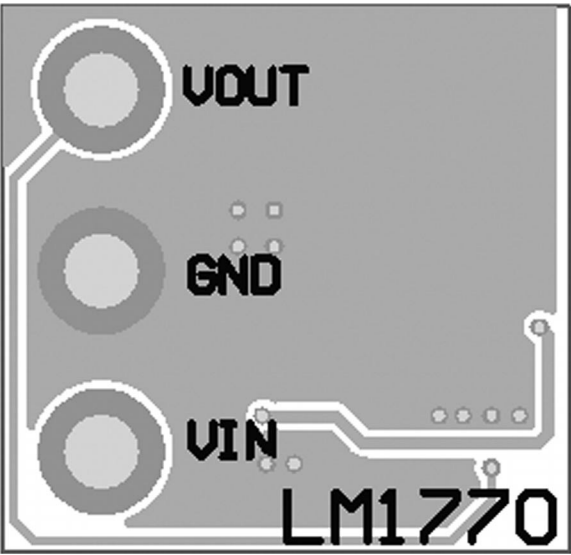

20167004

Bottom Layer

LM1770 Demoboard Information	
Board Material	FR4
Size	0.7" x 0.68"
Layers	2
Copper Thickness	1oz
Plating	HASL
Board Thickness	0.062"

Notes

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.

Leadfree products are RoHS compliant.



National Semiconductor
Americas Customer
Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959

www.national.com

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: jpn.feedback@nsc.com
Tel: 81-3-5639-7560