

International
IOR Rectifier

MBR30...CT
MBRB30...CT
MBR30...CT-1

SCHOTTKY RECTIFIER

30 Amp

$$I_{F(AV)} = 30\text{Amp}$$

$$V_R = 30 - 45\text{V}$$

Major Ratings and Characteristics




Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	30	A
I_{FRM} @ $T_C = 123^\circ\text{C}$ (Per Leg)	30	A
V_{RRM}	35-45	V
I_{FSM} @ $t_p = 5\mu\text{s}$ sine	1020	A
V_F @ 20Apk, $T_J = 125^\circ\text{C}$	0.6	V
T_J range	-65 to 150	$^\circ\text{C}$

Description/ Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150°C T_J operation
- Center tap TO-220, D²Pak and TO-262 packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

MBR30..CT	MBR30.. S	MBR30.. -1
 <p>Base Common Cathode</p> <p>1 O 2 O 3</p> <p>Anode Common Cathode Anode</p> <p>TO-220</p>	 <p>Base Common Cathode</p> <p>1 O 2 O 3</p> <p>Anode Common Cathode Anode</p> <p>D²PAK</p>	 <p>Base Common Cathode</p> <p>1 O 2 O 3</p> <p>Anode Common Cathode Anode</p> <p>TO-262</p>

Voltage Ratings

Parameters	MBR3035CT MBRB3035CT MBR3035CT-1	MBR3045CT MBRB3045CT MBR3045CT-1
V_R Max. DC Reverse Voltage (V)	35	45
V_{RWM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) (Per Device)	15 30	A	@ $T_C = 123^\circ\text{C}$, (Rated V_R)
I_{FRM} Peak Repetitive Forward Current (Per Leg)	30	A	Rated V_R , square wave, 20kHz $T_C = 123^\circ\text{C}$
I_{FSM} Non Repetitive Peak Surge Current	1020 200	A	5 μs Sine or 3 μs Rect. pulse Following any rated load condition and with rated V_{RRM} applied Surge applied at rated load conditions halfwave, single phase, 60Hz
E_{AS} Non-Repetitive Avalanche Energy	10	mJ	(Per Leg) $T_J = 25^\circ\text{C}$, $I_{AS} = 2\text{Amps}$, $L = 5\text{mH}$
I_{AR} Repetitive Avalanche Current (Per Leg)	2	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	Values	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1)	0.76 0.6 0.72	V	@ 30A @ 20A @ 30A $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
I_{RM} Max. Instantaneous Reverse Current (1)	1 100	mA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ Rated DC voltage
$V_{F(To)}$ Threshold Voltage	0.29	V	$T_J = T_J \text{ max.}$
r_t Forward Slope Resistance	13.6	m Ω	
C_T Max. Junction Capacitance	800	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change	10000	V/ μs	(Rated V_R)

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T_J Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-65 to 175	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	1.5	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased Only for TO-220
R_{thJA} Max. Thermal Resistance Junction to Ambient	50	$^\circ\text{C/W}$	DC operation For D ² Pak and TO-262
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min. 6 (5) Max. 12 (10)	Kg-cm (lbf-in)	Non-lubricated threads

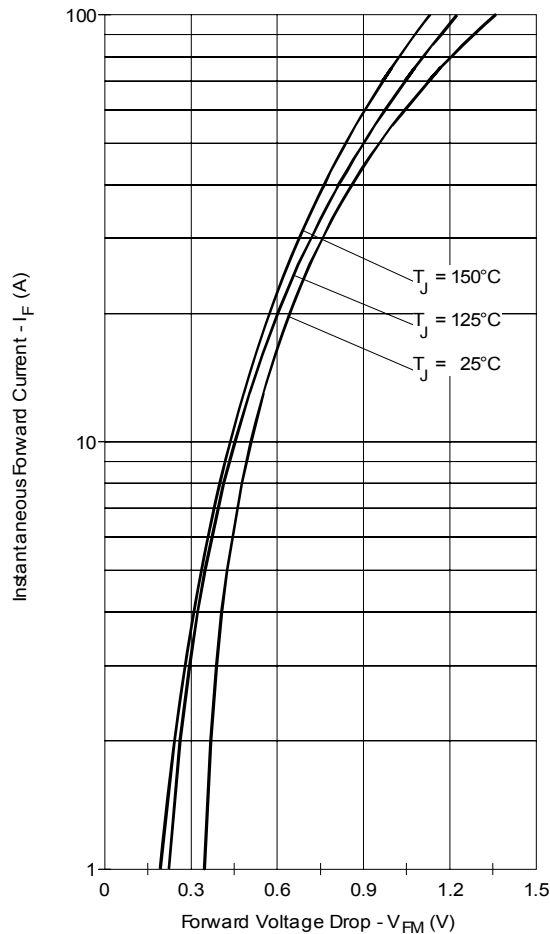


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

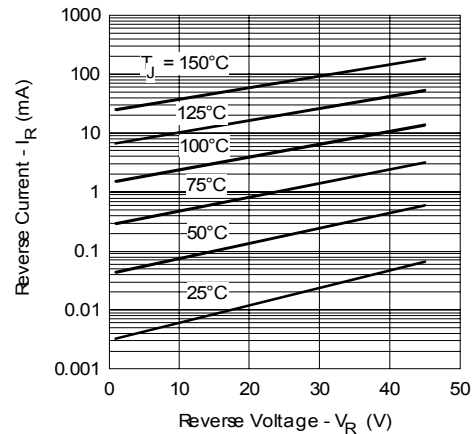


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

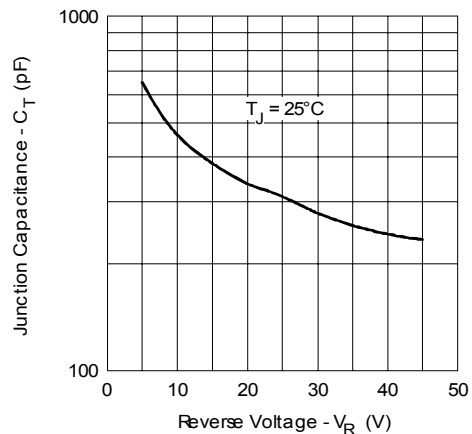


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

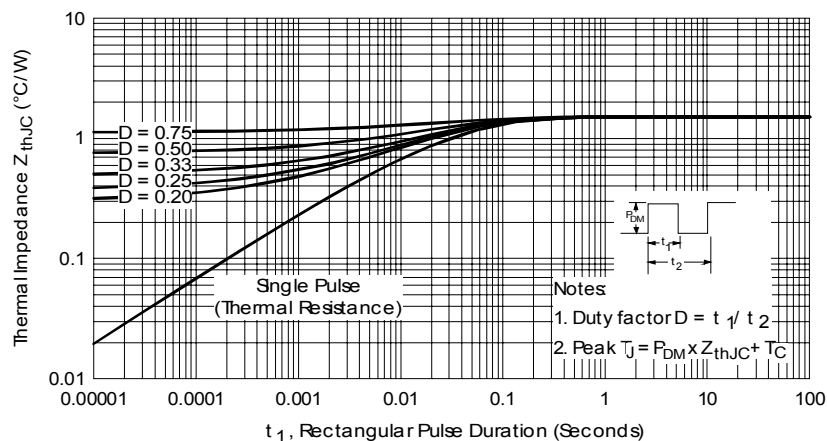


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

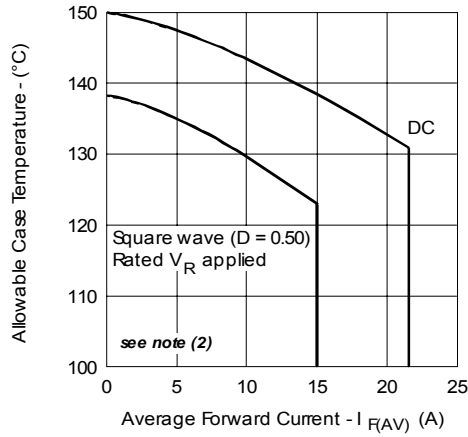


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

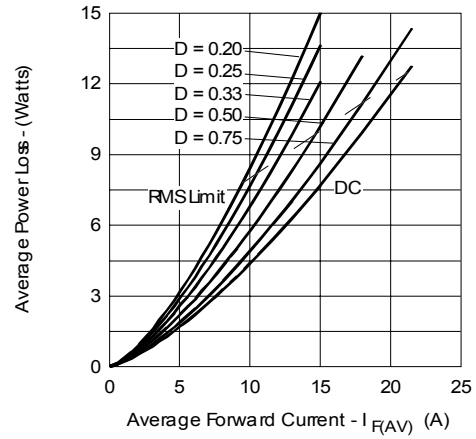


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

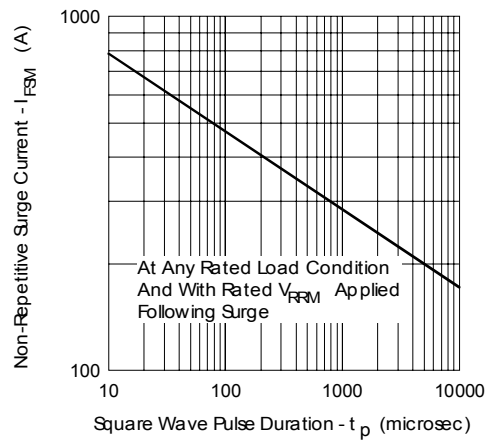




Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$


P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = rated V_R


Outline Table

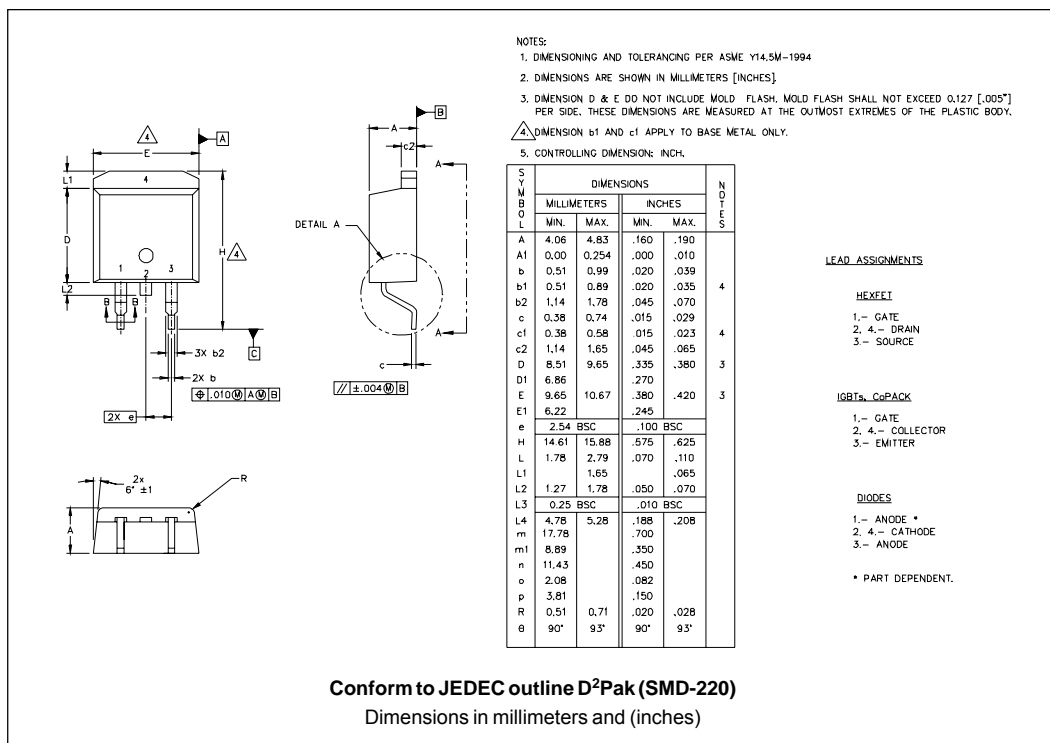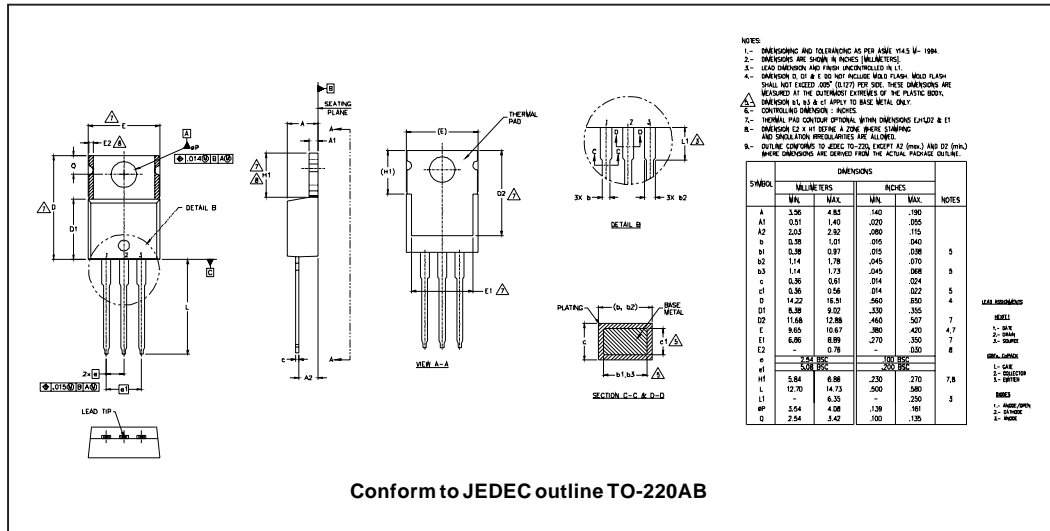

Outline Table

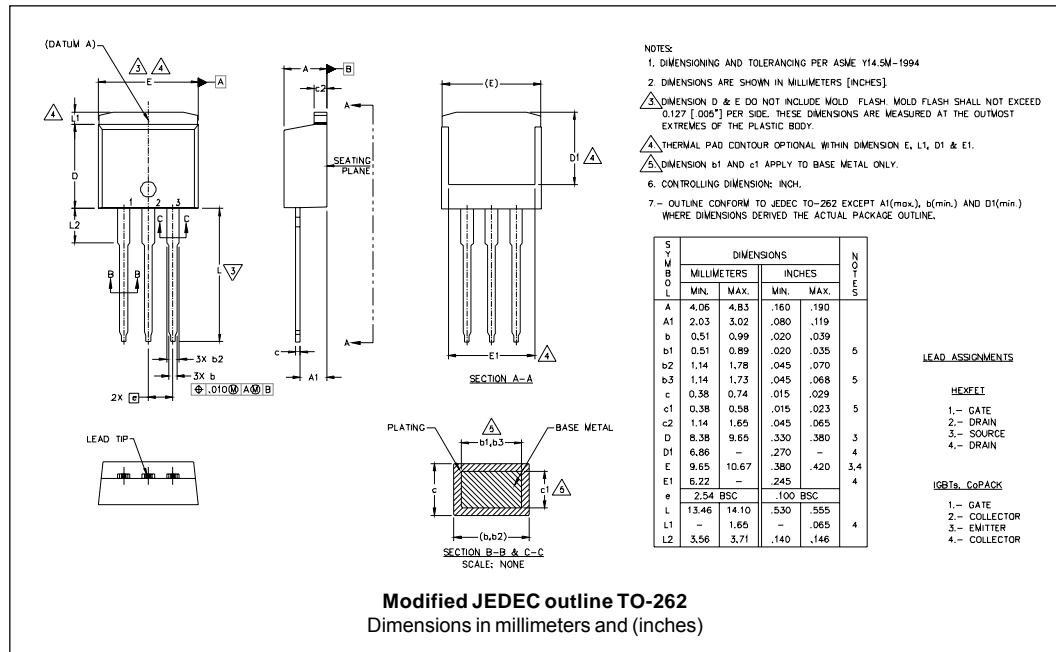


Tape & Reel Information

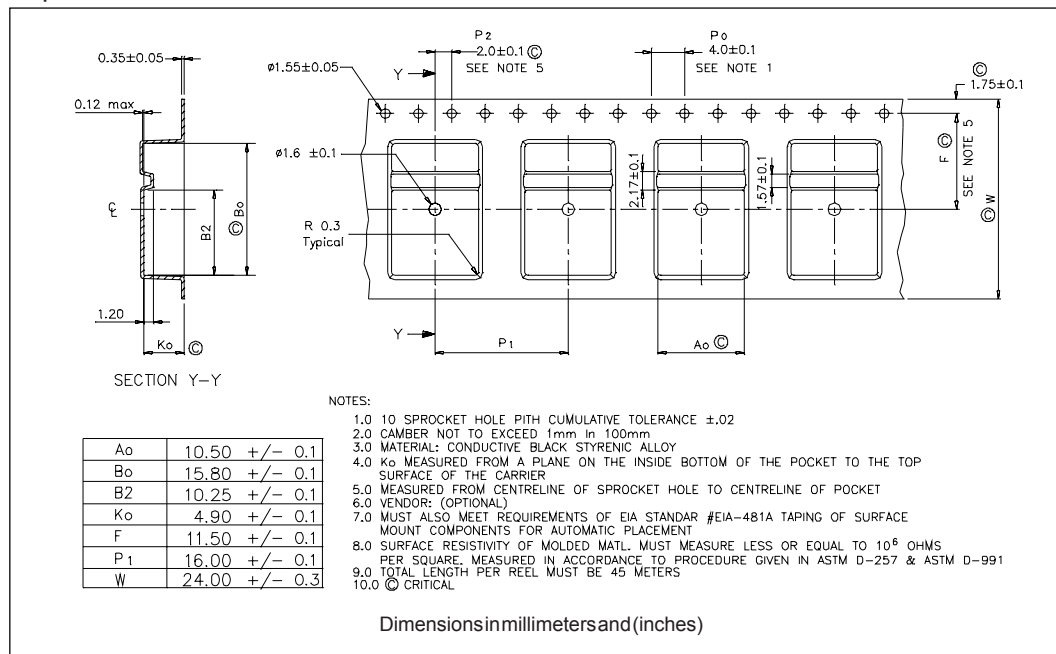

Part Marking Information


TO-220

EXAMPLE: THIS IS A MBR3045CT
LOT CODE 1789
ASSEMBLED ON WW 19, 2000
IN THE ASSEMBLY LINE "C"

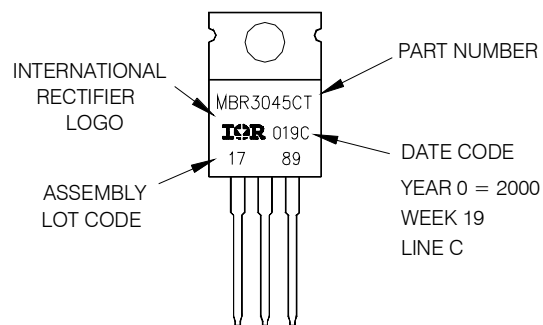


D²PAK

EXAMPLE: THIS IS A MBRB3030CT
LOT CODE 8024
ASSEMBLED ON WW 02, 2003
IN ASSEMBLY LINE "C"

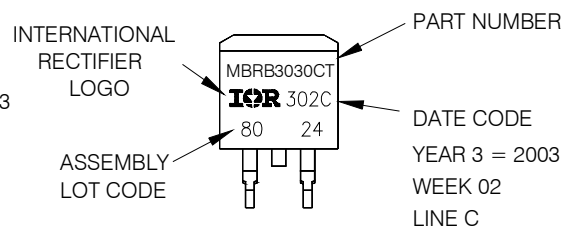

TO-262

EXAMPLE: THIS IS A MBR3030CT-1
LOT CODE 1789
ASSEMBLED ON WW 19, 2002
IN ASSEMBLY LINE "C"

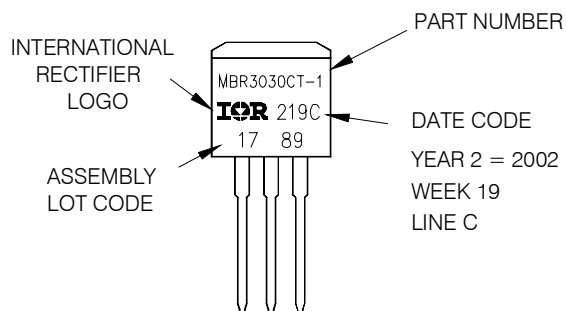

Ordering Information Table

Device Code							
	MBR	B	30	45	CT	-1	TRL
	1	2	3	4	5	6	7
	8						
1	Essential Part Number						
2	<ul style="list-style-type: none"> B = D²Pak 6 none none = TO-220 6 none none = TO-262 6 = -1 						
3	Current Rating (30 = 30A)						
4	Voltage Ratings						
5	CT = Essential Part Number						
6	<ul style="list-style-type: none"> none = TO-220 2 none none = D²Pak 2 = B -1 = TO-262 2 none 						
7	<ul style="list-style-type: none"> none = Tube (50 pieces) TRL = Tape & Reel (Left Oriented - for D²Pak only) TRR = Tape & Reel (Right Oriented - for D²Pak only) 						
8	<ul style="list-style-type: none"> none = Standard Production PbF = Lead-Free (for TO-220TO-262 and D²Pak tube) P = Lead-Free (for D²Pak TRR and TRL) 						

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
01/07



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.