



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MC7806CT

Three-Terminal Positive Voltage Regulators

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Output current in excess of 1.0 Ampere
- No external components required
- Internal thermal overload protection
- Internal short-circuit current limiting
- Output voltage offered in 2% tolerance
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

Maximum Ratings @ $T_A=25^{\circ}\text{C}$, Unless Otherwise Noted


Parameter	Symbol	Value	Unit
Input Voltage	V_1	30	V
Operating Ambient Temperature	P_D	15	W
Operating Junction Temperature	T_{OPR}	-20---+75	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55---+125	$^{\circ}\text{C}$

Electrical Characteristics ($V_i=11\text{V}$, $I_o=500\text{mA}$, $0^{\circ}\text{C}<T_j<125^{\circ}\text{C}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, Unless Otherwise Specified)

Parameter	Sym	Min	Typ	Max	Test conditions
Output Voltage	V_o	5.88V	6.0V	6.12V	$T_j=25^{\circ}\text{C}$
		5.83V		6.17V	$8\text{V} \leq V_1 \leq 21\text{V}$, $5\text{mA} \leq I_o \leq 1.0\text{A}$, $P_D=15\text{W}$
Load Regulation	ΔV_o		14mV	120mV	$5\text{mA} \leq I_o \leq 1.5\text{A}$, $T_j=25^{\circ}\text{C}$,
			4.0mV	60mV	$250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
Line regulation	ΔV_o		5.0mV	120mV	$8\text{V} \leq V_1 \leq 25\text{V}$, $T_j=25^{\circ}\text{C}$
			1.5mV	60mV	$9\text{V} \leq V_1 \leq 13\text{V}$, $T_j=25^{\circ}\text{C}$
Quiescent Current	I_q		4.3mA	8.0mA	$T_j=25^{\circ}\text{C}$, $I_o=0$
Quiescent Current Change	ΔI_q			1.3mA 0.5mA	$7\text{V} \leq V_1 \leq 25\text{V}$ $5\text{mA} \leq I_o \leq 1.0\text{A}$
Output Noise Voltage	V_N		45 μV		$10\text{Hz} \leq f \leq 100\text{KHz}$ $T_j=25^{\circ}\text{C}$
Ripple Rejection	RR	59dB	75dB		$f=120\text{Hz}$
Dropout Voltage	V_d		2.0V		$I_o=1.0\text{A}$, $T_j=25^{\circ}\text{C}$
Output Short Circuit Current	R_o		19mohm		$f=1.0\text{KHz}$
Output Short Circuit Current	I_{os}		550mA		$T_j=25^{\circ}\text{C}$
Peak Output Current	I_{opeak}		2.2A		$T_j=25^{\circ}\text{C}$
Temperature Coefficient of Output voltage	$\Delta V_o / \Delta T_j$		0.8mV/ $^{\circ}\text{C}$		$0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$, $I_o=5\text{mA}$

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.


TO-220

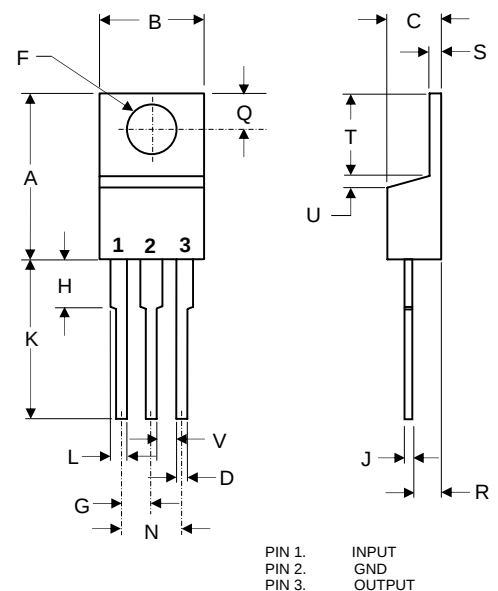

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	Ø
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	----	.050	----	1.27	
V	.045	----	1.15	----	

MC7806CT

Representation Schematic Diagram

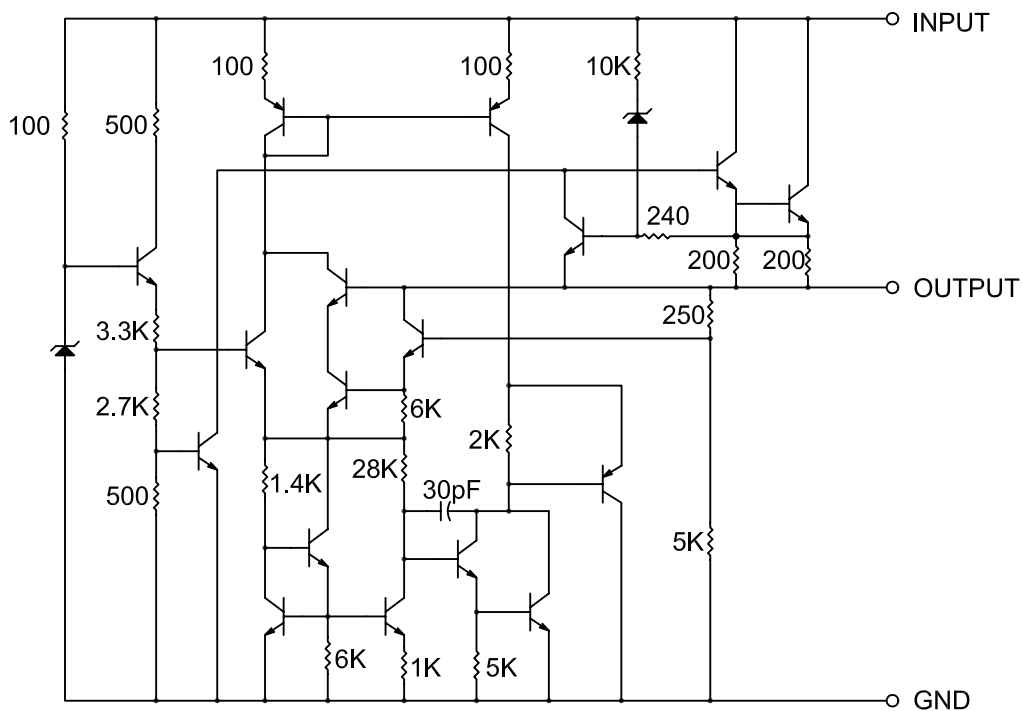

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Box

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.