



REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/25/2005
B	added missing dimensions	1/29/2008

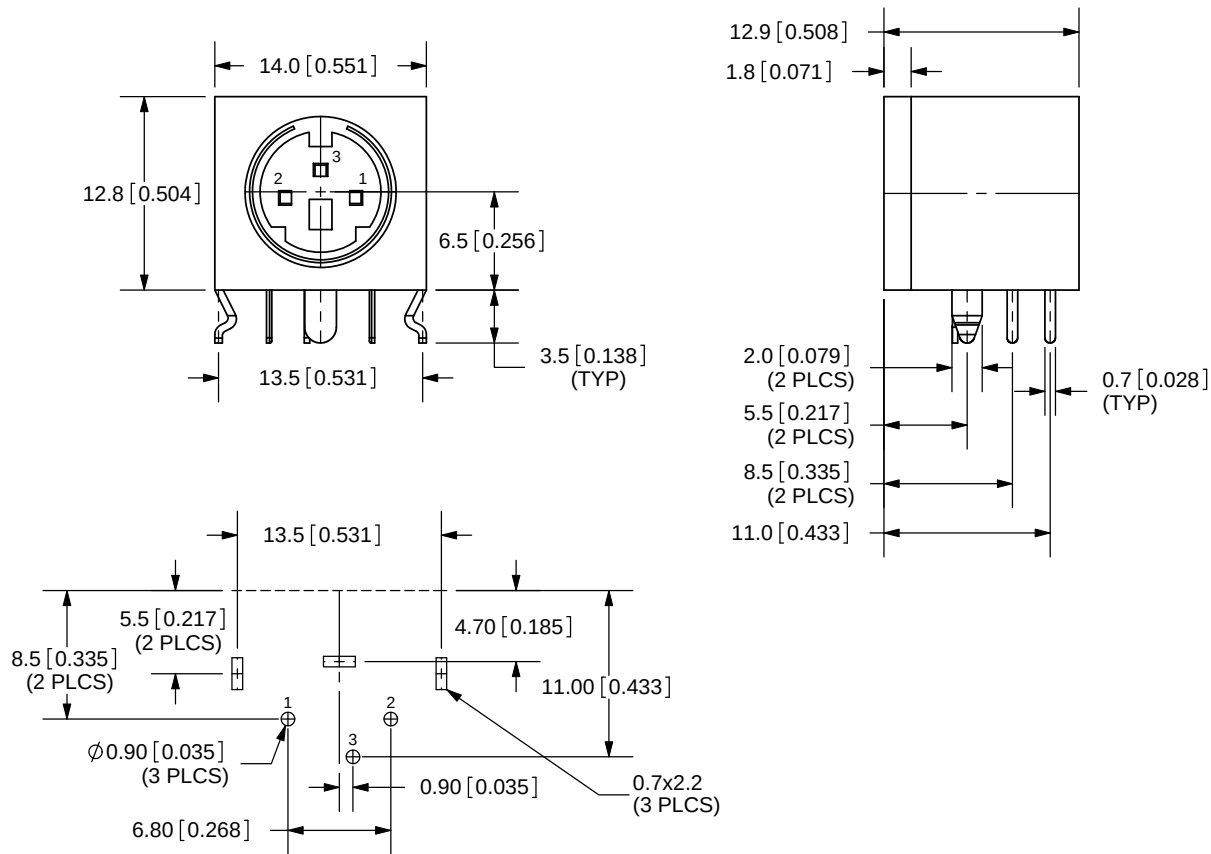

HOLE LAYOUT
TOP VIEW

SPECIFICATIONS:

RATING: 12V DC @ 2A; 100V AC @ 1A
 INSULATION RESISTANCE: 10M OHMS MIN: 250V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSERTION FORCE: 5KG MAX
 WITHDRAWAL FORCE: 0.8KG-3.5KG
 LIFE: 5,000 CYCLES



TOLERANCE:
 ±0.2mm UNLESS OTHERWISE
 SPECIFIED



CUI INC

20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com

	MATERIAL	PLATING	TITLE:	MINIATURE CIRCULAR DIN CONNECTOR	REV:	B
SHIELDING PLATE	Steel	Tin	PART NO.	MD-30SMK	UNITS:	MM [INCHES]
CONTACT TERMINALS (1-3)	Phosphor Bronze	Silver	DRAWN BY:	ZRJ	APPROVED BY:	SCALE:
EARTH TERMINALS	Brass	Tin				2:1
HOUSING	PBT					

PC FILE NAME:
 MD-30SMK

COPYRIGHT 2008 BY CUI INC.