
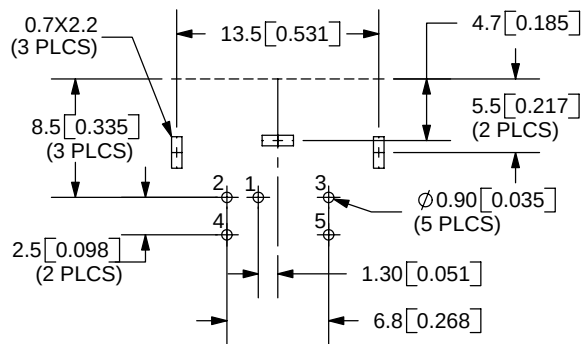

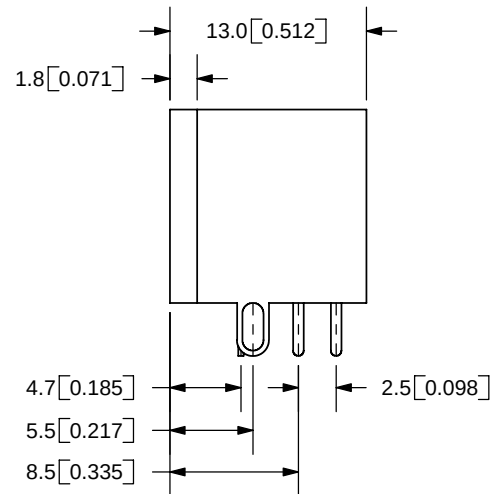


REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/20/2005
B	Added dimensions	3/3/2006

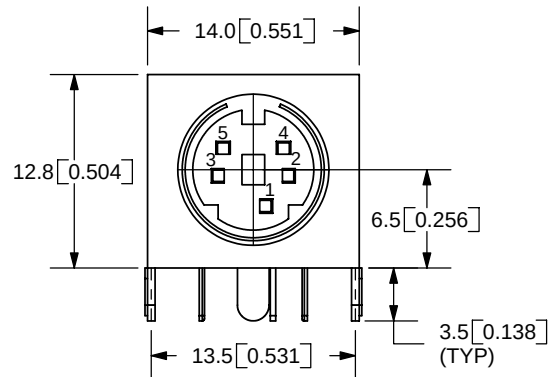

HOLE LAYOUT
TOP VIEW

SPECIFICATIONS:
 RATING: 12V DC @ 2A; 100V AC @ 1A
 INSULATION RESISTANCE: 10M OHMS MIN: 250V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSERTION FORCE: 5KG MAX
 WITHDRAWAL FORCE: 0.8KG~3.5KG
 LIFE: 5,000 CYCLES

TOLERANCE:
 ±0.2mm UNLESS OTHERWISE
 SPECIFIED



CUI INC

20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

	MATERIAL	PLATING	TITLE: MINIATURE CIRCULAR DIN CONNECTOR		REV: B
SHIELDING PLATE	Steel	Tin	PART NO. MD-50SM		UNITS: MM [INCHES]
CONTACT TERMINALS (1-5)	Phosphor Bronze	Silver			
EARTH TERMINALS	Brass	Tin	DRAWN BY: ZRJ		APPROVED BY:
HOUSING	PBT				
					SCALE: 2:1

PC FILE NAME:
 MD-50SM

COPYRIGHT 2006 BY CUI INC.