


REV. K

FIG. 2
-A: OPTION
MOLDED ALIGNMENT PIN (3 POS. MIN.)
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)

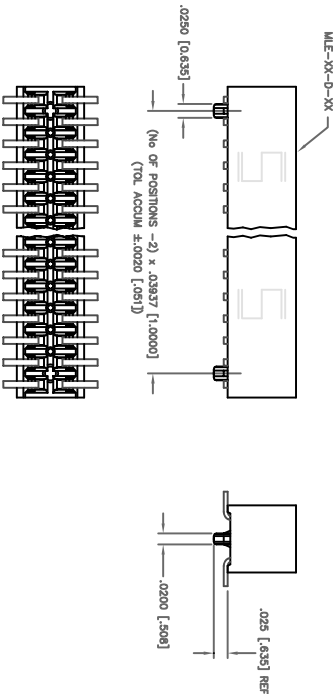

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED		TOLERANCES ARE:		TITLES:		DWG NO:	
ONE PLACE DECIMALS ± .1 [2.54]	THREE PLACE DECIMALS ± .005 [0.127]	ANGLES	± 2°	1mm DUAL ROW	MLE-1XX-XX-X-DV-X				
TWO PLACE DECIMALS ± .01 [0.254]	FOUR PLACE DECIMALS ± .0020 [0.051]			STRIP ASSEMBLY					


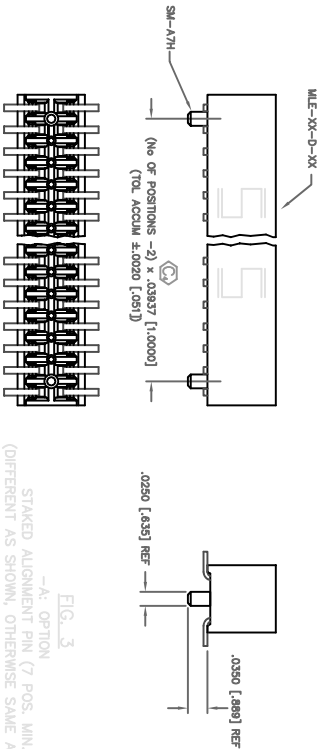


FIG. 3
-A: OPTION
STAKED ALIGNMENT PIN (7 POS. MIN.)
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)

FIG. 4
-P: OPTION
PICK & PLACE PAD
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)

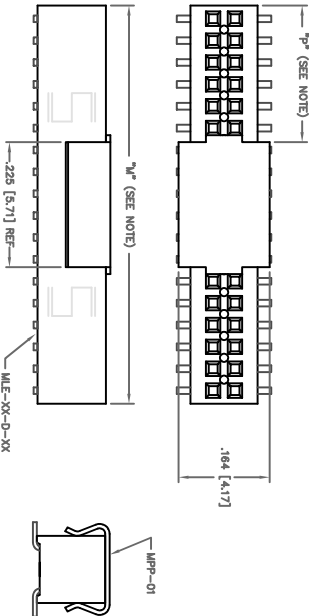

NOTE: "M" = USED MEASURED DIMENSION (REF)
"P" = ((("M" - .225 [5.71])/2) ± .020 [.51])

NOTE: "R" = USED MEASURED DIMENSION (REF)
"S" = ((("R" - .1575 [4.000]) / 2) ± .020 [.51])




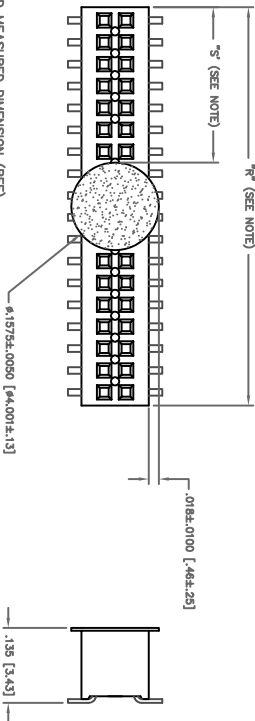


FIG. 5
-K: OPTION
POLYIMIDE FILM PAD

PACKAGING VIEW

OPTION	TUBE	PLUG
NO OPTION, -A	PT-1-24-14-09	TP-24-02
-K, -K-A	PT-1-24-01-62	TP-12
-P, -P-A		



PT-1-24-14-09

PT-1-24-01-62

PT-1-24-14-09

PROPERTY NOTE
THIS DOCUMENT CONTAINS INFORMATION
OF A PROPRIETARY NATURE AND IS THE
PROPERTY OF SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSMITTED IN ANY
FORM OR BY ANY MEANS, ELECTRONIC
OR MECHANICAL, INCLUDING PHOTOCOPYING,
RECORDING, OR BY ANY INFORMATION
SYSTEM WITHOUT PERMISSION IN WRITING
CONSENT OF SAMTEC INC.