

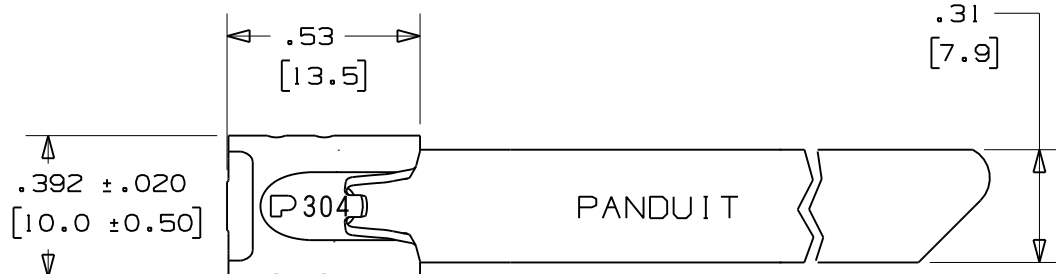


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

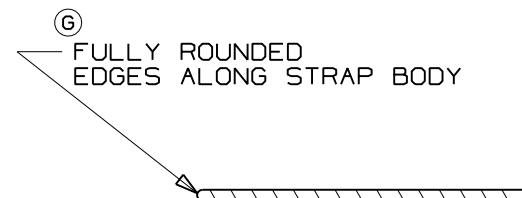

	PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	LENGTH ^(D) L ±.3 [7]
(B)	MLT2H-LP	50	2" [51]	7.9" [201]
(E)	MLT2.7H-LP	50	2.7" [69]	10.2" [259]
(C)	MLT4H-LP	50	4" [102]	14.3" [362]
	MLT6H-LP	50	6" [152]	20.5" [521]
	MLT8H-LP	50	8" [203]	26.8" [679]
	MLT10H-LP	50	10" [254]	33.0" [838]
	MLT12H-Q	25	12" [304]	39.3" [998]
	MLT14H-Q	25	14" [355]	45.5" [1156]
(H)	MLT2H-TL	250	2" [51]	7.9" [201]
	MLT4H-TL	250	4" [102]	14.3" [362]

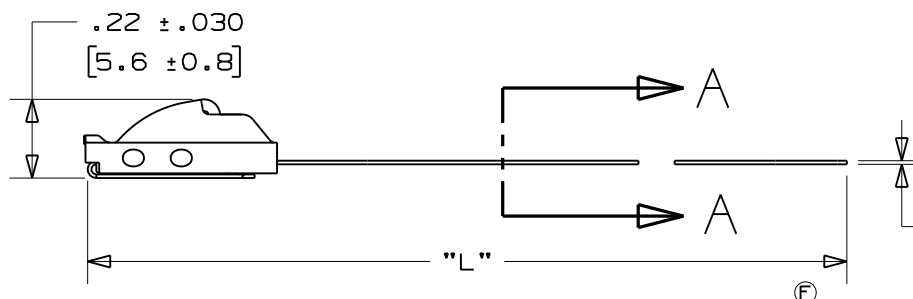

SECTION A - A
SCALE: 6x

NOTES:

- 1.) APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
- (A) 2.) MINIMUM LOOP TENSILE STRENGTH - 450 LBS. (2000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- 3.) [] DENOTES DIMENSION IN MILLIMETERS
- 4.) TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
- 5.) MATERIAL: 304 STAINLESS STEEL

04	11/06	JAMB	SKB	(H) ADDED PANDUIT PART NO'S. MLT2H-TL & MLT4H-TL PACKAGE QTY. 250 TO TABLE	SS00281	---
03	8/04	JAMB	DPN	(G) REMOVED "AISI NO.1 FULL RADIUSED" AND REPLACED WITH "FULLY ROUNDED"	11907	CCH JJB
02	10/03	BRH	DPN	(F) ADDED ST3MT TO APPLICATION TOOLS NOTE	11162	CCH JJB
01	6/03	JAMB	DPN	(A) MIN LOOP TENSILE STRENGTH WAS 250 LBS. (1112 NEWTONS) (G) MAX. BUNDLE DIA. [mm] WAS [50]	10568	CCH JJB
--	----	----	----	(C) MAX. BUNDLE DIA. [mm] WAS [101], LGTH. WAS 14.2 [361] (D) TOL. WAS ±.2 [5] (E) MAX BUNDLE [mm] WAS [68]	-----	---
00	9/02	JAMB	DPN	RELEASED	10059	CCH JJB
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM CUST

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

METAL LOCKING TIE
HEAVY SERIES - 304 STAINLESS STEEL

DRAWN BY JAMB CHK'D DPN SCALE 2x DRAWING NO. S41115