



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MMBT3904T

Features

- Case Material: Molded Plastic. UL Flammability Classification Rating 94-0 and MSL Rating 1
- Collector Current: 0.2A
- Operating and Storage Junction Temperatures: -55°C to 150°C
- Marking: 1N

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage* ($I_C=1.0mA$, $I_B=0$)	40		Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10\mu A$, $I_E=0$)	60		Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=10\mu A$, $I_C=0$)	6.0		Vdc
I_{CBO}	Collector Cut-off Current ($V_{CB}=30V$, $I_E=0$)		50	nAdc
I_{EBO}	Emitter Cut-off Current ($V_{EB}=5V$, $I_C=0$)		50	nAdc

ON CHARACTERISTICS

h_{FE}	DC Current Gain* ($I_C=0.1mA$, $V_{CE}=1.0V$) ($I_C=1.0mA$, $V_{CE}=1.0V$) ($I_C=10mA$, $V_{CE}=1.0V$) ($I_C=50mA$, $V_{CE}=1.0V$) ($I_C=100mA$, $V_{CE}=1.0V$)	40 70 100 60 30	300	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=10mA$, $I_B=1.0mA$) ($I_C=50mA$, $I_B=5.0mA$)		0.2 0.3	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=10mA$, $I_B=1.0mA$) ($I_C=50mA$, $I_B=5.0mA$)	0.65	0.85 0.95	Vdc

SMALL-SIGNAL CHARACTERISTICS

f_T	Current Gain-Bandwidth Product ($I_C=10mA$, $V_{CE}=20V$, $f=100MHz$)	300		MHz
C_{obo}	Output Capacitance ($V_{CB}=5.0V$, $I_E=0$, $f=1.0MHz$)		4.0	pF
NF	Noise Figure ($I_C=100\mu A$, $V_{CE}=5.0V$, $R_S=1.0k\Omega$, $f=1MHz$)		5.0	dB





SWITCHING CHARACTERISTICS

t_d	Delay Time	($V_{CC}=3.0V$, $V_{BE}=0.5V$, $I_C=10mA$, $I_{B1}=1.0mA$)	35	ns
t_r	Rise Time	($V_{CC}=3.0V$, $I_C=10mA$, $I_{B1}=I_{B2}=1.0mA$)	35	ns
t_s	Storage Time	($V_{CC}=3.0V$, $I_C=10mA$, $I_{B1}=I_{B2}=1.0mA$)	200	ns
t_f	Fall Time	($V_{CC}=3.0V$, $I_C=10mA$, $I_{B1}=I_{B2}=1.0mA$)	50	ns

150mW


NPN General Purpose Amplifier

SOT-523




DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.059	.067	1.50	1.70	
B	.030	.033	0.75	0.85	
C	.057	.069	1.45	1.75	
D	.020 Nominal		0.50 Nominal		
E	.035	.043	0.90	1.10	
G	.000	.004	.000	.100	
H	.028	.031	.70	0.80	
J	.004	.008	.100	.200	
K	.010	.014	.25	.35	

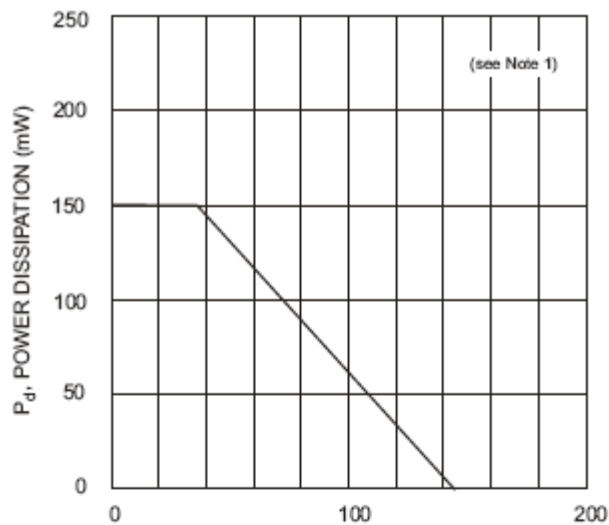


T_A , AMBIENT TEMPERATURE (°C)

Fig. 1, Power Derating Curve

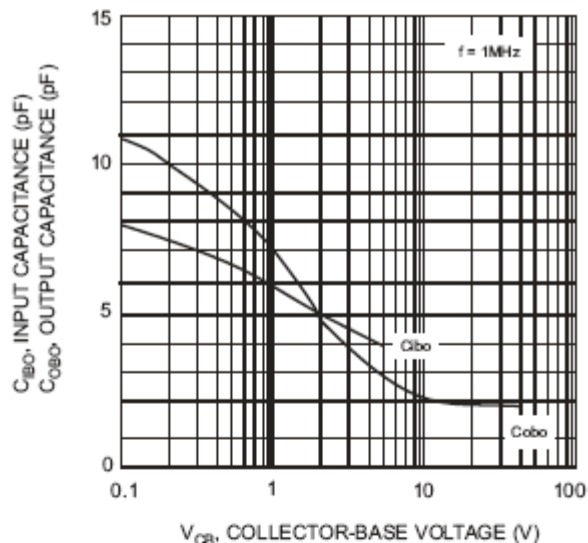


V_{CB} , COLLECTOR-BASE VOLTAGE (V)

Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

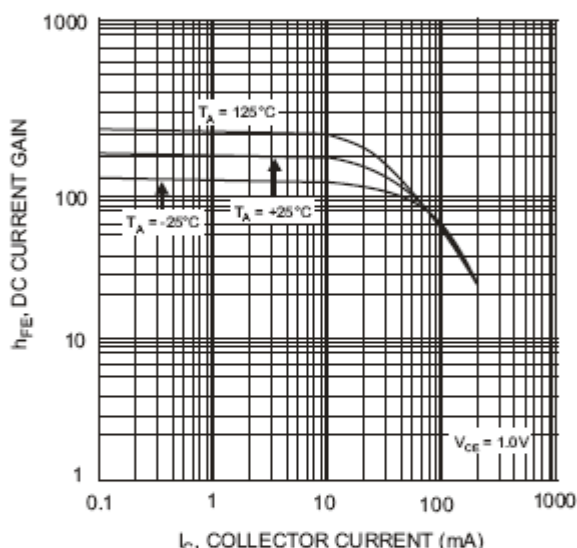


I_C , COLLECTOR CURRENT (mA)

Fig. 3, Typical DC Current Gain vs. Collector Current

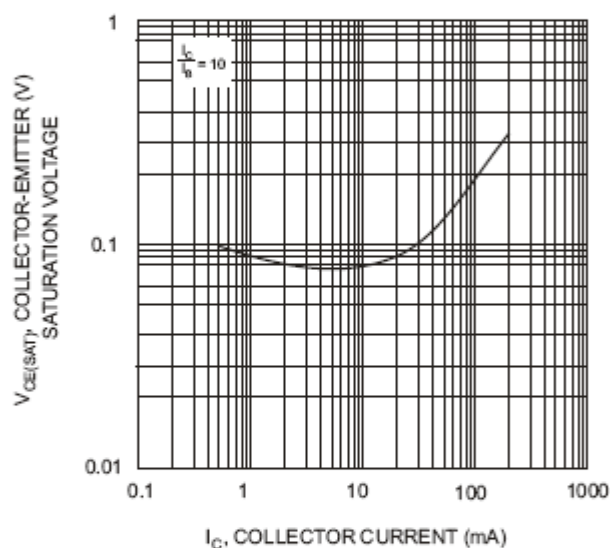

I_C , COLLECTOR CURRENT (mA)

Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

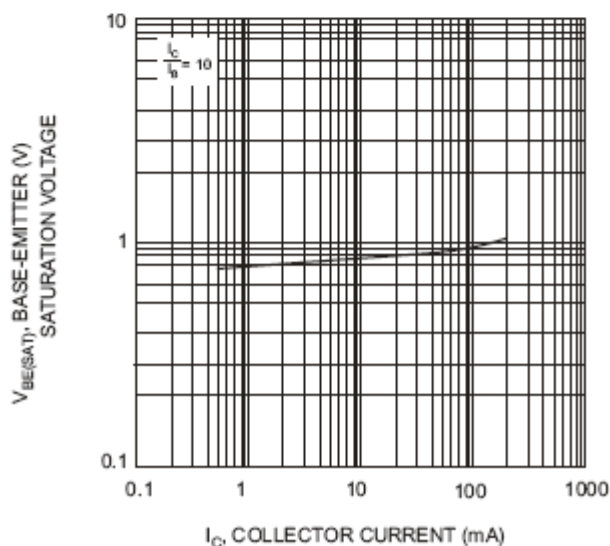

I_C , COLLECTOR CURRENT (mA)

Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.