

Features


- Dual TVS in Common Anode Configuration
- 24W/40W Peak Power Dissipation Rating @ 1.0ms (Unidirectional)
- 225 mW Power Dissipation
- Ideally Suited for Automated Insertion
- Low Leakage
- **Lead, Halogen and Antimony Free, RoHS Compliant "Green" Device (Notes 5 and 6)**



Top View

Mechanical Data

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- ESD Rating Exceeding 16kV per the Human Body Model (Note 4)
- Marking Information: See Page 4
- Ordering Information: See Page 4
- Weight: 0.008 grams (approximate)



Device Schematic

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Power Dissipation MMBZ5V6AL - MMBZ10VAL (Note 2)	P _{pk}	24	W
Peak Power Dissipation MMBZ15VAL - MMBZ33VAL (Note 2)	P _{pk}	40	W

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 1)	P _D	225	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	556	°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150	°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

24 Watt (V_F = 0.9V max @ I_F = 10mA)

Type Number	Marking Code	V _{RWM}	I _R @ V _{RWM}	Breakdown Voltage				V _C @ I _{PP} (Note 2)		Typical Temperature Coefficient
				V _{BR} (Note 3) (V)			@ I _T	V _C	I _{PP}	
		Volts	μA	Min	Nom	Max	mA	V	A	
MMBZ5V6AL	K9A	3	5.0	5.32	5.6	5.88	20	8.0	3.0	1.8

24 Watt (V_F = 1.1V max @ I_F = 200mA)





Type Number	Marking Code	V _{RWM}	I _R @ V _{RWM}	Breakdown Voltage				V _C @ I _{PP} (Note 2)		Typical Temperature Coefficient
				V _{BR} (Note 3) (V)			@ I _T	V _C	I _{PP}	
		Volts	μA	Min	Nom	Max	mA	V	A	T _c (%/°C)
MMBZ6V2AL	K9B	3.0	0.5	5.89	6.2	6.51	1.0	8.7	2.76	+0.04
MMBZ6V8AL	K9C	4.5	0.5	6.46	6.8	7.14	1.0	9.6	2.5	+0.045
MMBZ9V1AL	K9D	6.0	0.3	8.65	9.1	9.56	1.0	14	1.7	+0.065
MMBZ10VAL	K9E	6.5	0.3	9.50	10	10.5	1.0	14.2	1.7	+0.065



Notes:

1. Device mounted on FR-5 PCB 1.0 x 0.75 x 0.062 inch pad layout as shown on Diodes Inc. suggested pad layout AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>. 200mW per element must not be exceeded.
2. Non-repetitive current pulse per Figure 2 and derate above T_A = 25°C per Figure 1.
3. Short duration pulse test used to minimize self-heating effect.
4. MMBZ5V6AL and MMBZ15VAL exceed 16kV ESD rating, all other voltages exceed 8kV ESD rating.
5. No purposefully added lead. Halogen and Antimony Free.
6. Product manufactured with Data Code V9 (week 33, 2008) and newer are built with Green Molding Compound. Product manufactured prior to Date Code V9 are built with Non-Green Molding Compound and may contain Halogens or Sb₂O₃ Fire Retardants.


Electrical Characteristics (Continued) @ $T_A = 25^\circ\text{C}$ unless otherwise specified
40 Watt ($V_F = 1.1\text{V max @ } I_F = 200\text{mA}$)

Type Number	Marking Code	V_{RWM}	$I_R @ V_{RWM}$	Breakdown Voltage				$V_C @ I_{PP}$ (Note 2)		Typical Temperature Coefficient $T_c (\%/^\circ\text{C})$
				V_{BR} (Note 3) (V)			@ I_T	V_C	I_{PP}	
				Min	Nom	Max		V	A	
MMBZ15VAL	K9K	12	50	14.25	15	15.75	1.0	21	1.9	+0.080
MMBZ18VAL	K9L	14.5	50	17.10	18	18.90	1.0	25	1.6	+0.090
MMBZ20VAL	K9N	17	50	19.00	20	21.00	1.0	28	1.4	+0.090
MMBZ27VAL	K9Q	22	50	25.65	27	28.35	1.0	40	1.0	+0.090
MMBZ33VAL	K9T	26	50	31.35	33	34.65	1.0	46	0.87	+0.090

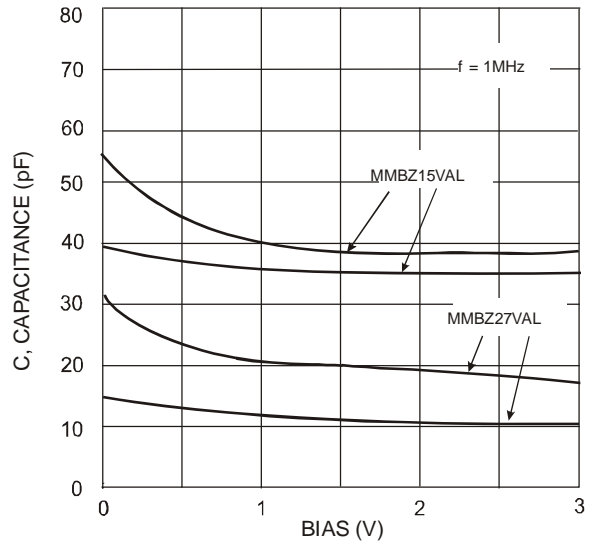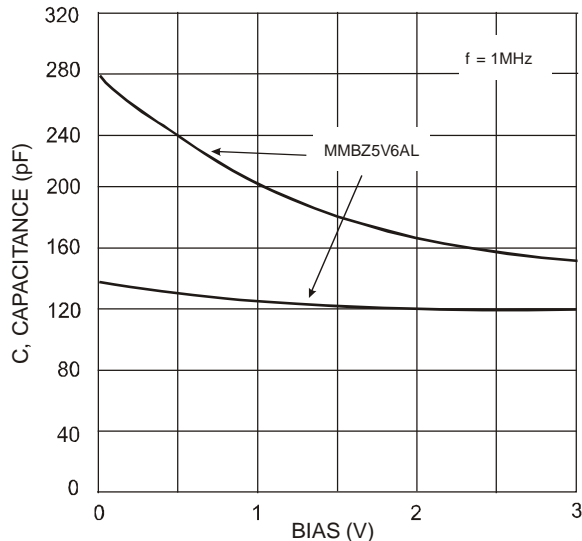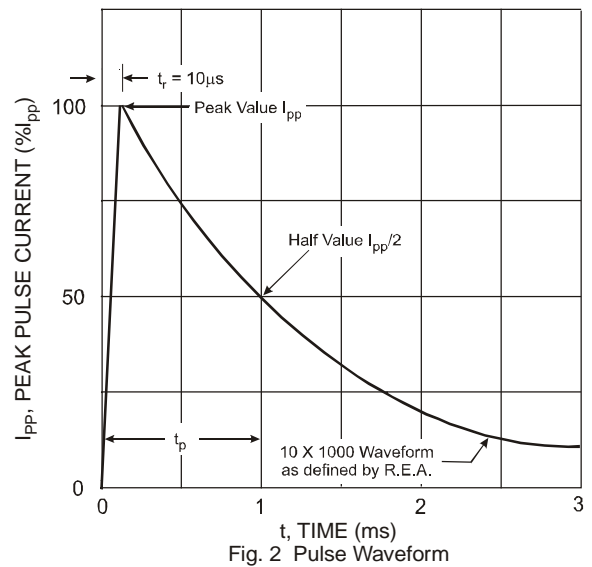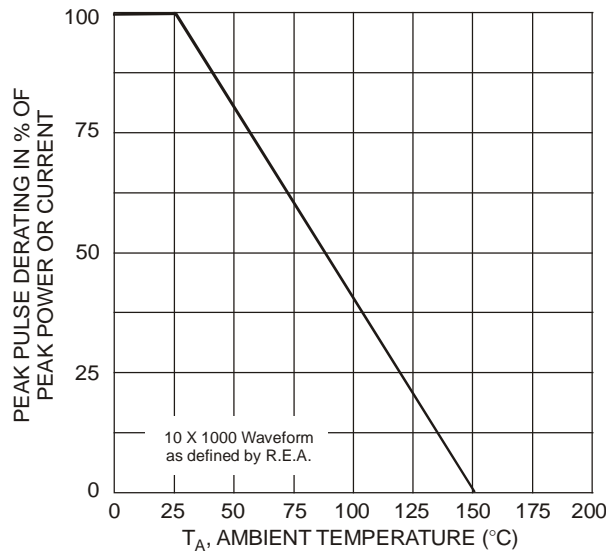

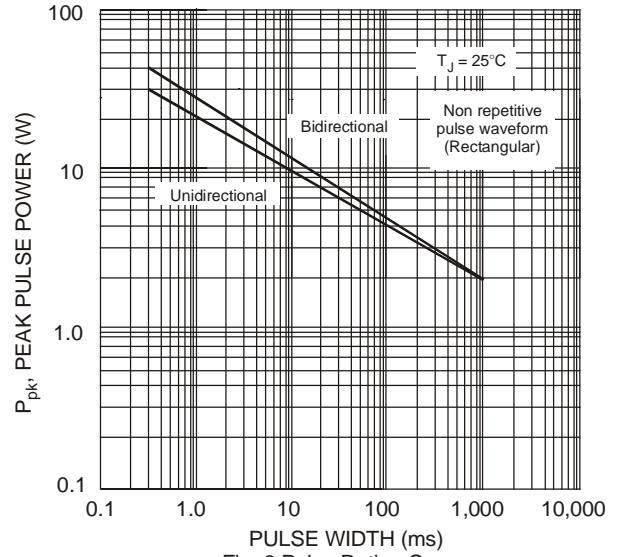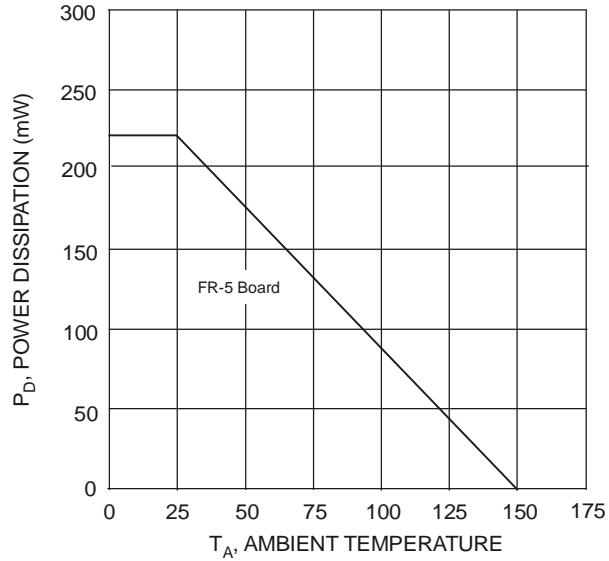

Power is defined as $P_{pk} = V_C \times I_{pp}$

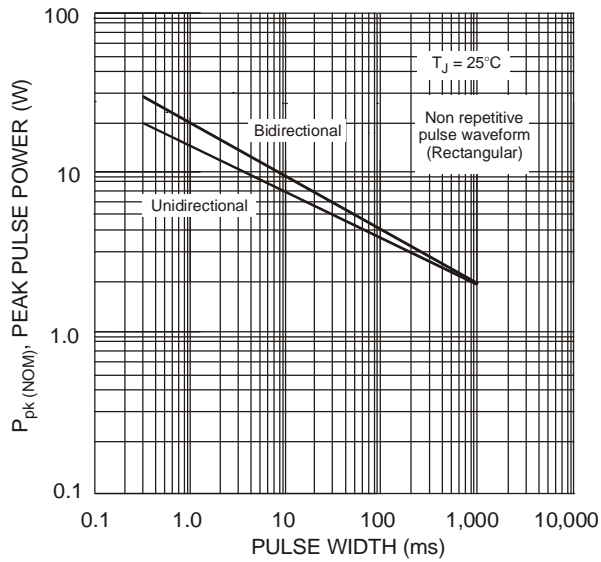

Power is defined as $P_{pk(NOM)} = V_{Z(NOM)} \times I_{pp}$
where $V_{Z(NOM)}$ is the nominal Zener voltage
measured at the low test current used
for voltage classification


Ordering Information (Note 7)

Part Number (Type Number)-7*-F	Case SOT-23	Packaging 3000/Tape & Reel
-----------------------------------	----------------	-------------------------------

* Example: 5.6V type = MMBZ5V6AL-7-F.

Notes: 7. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information




xxx = Product type marking code,
See Electrical Characteristics Table, Pages 1 & 2
YM = Date Code Marking
Y = Year (ex: T = 2006)
M = Month (ex: 9 = September)

Date Code Key

Year	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Code	T	U	V	W	X	Y	Z	A	B	C


Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

Package Outline Dimensions

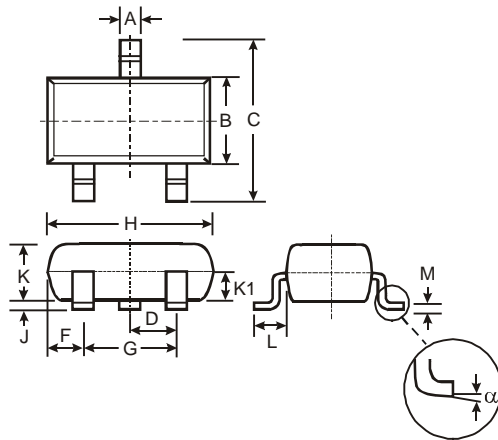

SOT-23			
Dim	Min	Max	Typ
A	0.37	0.51	0.40
B	1.20	1.40	1.30
C	2.30	2.50	2.40
D	0.89	1.03	0.915
F	0.45	0.60	0.535
G	1.78	2.05	1.83
H	2.80	3.00	2.90
J	0.013	0.10	0.05
K	0.903	1.10	1.00
K1	-	-	0.400
L	0.45	0.61	0.55
M	0.085	0.18	0.11
α	0°	8°	-
All Dimensions in mm			

Suggested Pad Layout

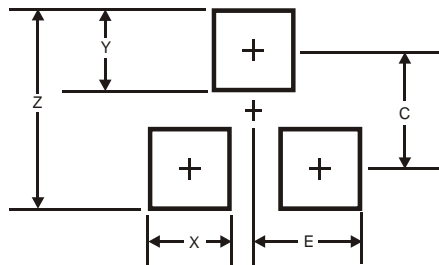

Dimensions	Value (in mm)
Z	2.9
X	0.8
Y	0.9
C	2.0
E	1.35

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.