



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MMDT3906V

Features

- Epitaxial Die Construction
- Ideal for Low Power Amplification and Switching
- Ultra-small Surface Mount Package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking: KAR

Maximum Ratings @ 250C Unless Otherwise Specified


Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	-40	V
V_{CBO}	Collector-Base Voltage	-40	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-0.2	A
P_C	Collector Dissipation	0.15	W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	833	$^{\circ}C/W$
T_J	Operating Junction Temperature	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=-1mA_{dc}$, $I_B=0$)	-40	---	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-10\mu A_{dc}$, $I_E=0$)	-40	---	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=-10\mu A_{dc}$, $I_C=0$)	-5	---	---	Vdc
I_{CEX}	Collector Cutoff Current ($V_{CE}=-30V_{dc}$, $V_{EB(OFF)}=-3V_{dc}$)	---	---	50	nAdc
I_{BL}	Base Cutoff Current ($V_{CE}=-30V_{dc}$, $V_{EB(OFF)}=-3V_{dc}$)	---	---	50	nAdc
h_{FE}	DC Current Gain ($I_C=-0.1mA_{dc}$, $V_{CE}=-1V_{dc}$) ($I_C=-1mA_{dc}$, $V_{CE}=-1V_{dc}$) ($I_C=-10mA_{dc}$, $V_{CE}=-1V_{dc}$) ($I_C=-50mA_{dc}$, $V_{CE}=-1V_{dc}$) ($I_C=-100mA_{dc}$, $V_{CE}=-1V_{dc}$)	60 80 100 60 30	---	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=-10mA_{dc}$, $I_B=-1mA_{dc}$) ($I_C=-50mA_{dc}$, $I_B=-5mA_{dc}$)	---	---	-0.25 -0.4	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=-10mA_{dc}$, $I_B=-1mA_{dc}$) ($I_C=-50mA_{dc}$, $I_B=-5mA_{dc}$)	-0.65 ---	---	-0.85 -0.95	Vdc

PNP Plastic-Encapsulate Transistors

SOT-563

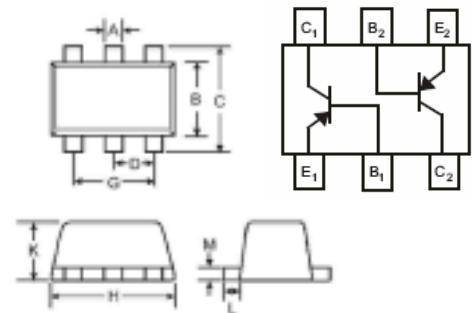

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.006	.011	0.15	0.30	
B	.043	.049	1.10	1.25	
C	.061	.067	1.55	1.70	
D	.020		0.50		
G	.035	.043	0.90	1.10	
H	.059	.067	1.50	1.70	
K	.022	.023	0.56	0.60	
L	.004	.011	0.10	0.30	
M	.004	.007	0.10	0.18	

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
f_T	Transition Frequency ($V_{CE}=-20V_{dc}$, $I_C=-10mA_{dc}$, $f=100MHz$)	250	---	---	MHz
C_{ob}	Output Capacitance ($V_{CB}=-5V_{dc}$, $f=1.0MHz$, $I_E=0$)	---	---	4.5	pF
NF	Noise Figure ($V_{CE}=-5V$, $I_C=-0.1mA$, $f=1KHz$, $R_S=1k\Omega$)	---	---	4	dB
t_d	Delay Time	---	---	35	ns
t_r	Rise Time			35	ns
t_s	Storage Time	---	---	225	ns
t_f	Fall Time			75	ns

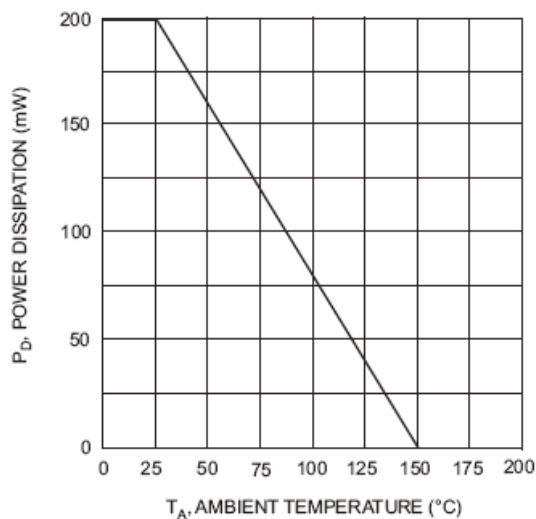


Fig. 1, Max Power Dissipation vs Ambient Temperature

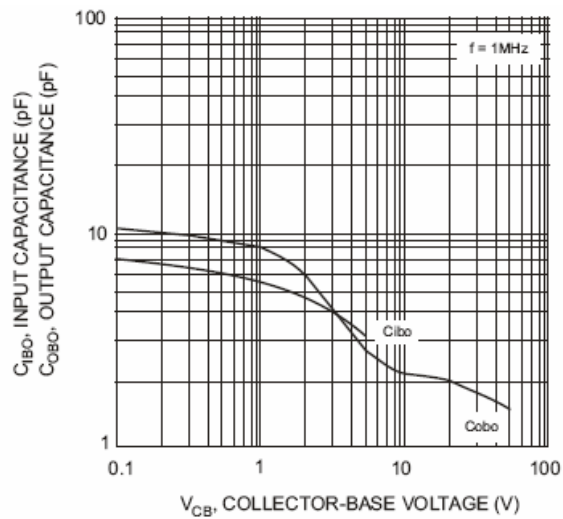


Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

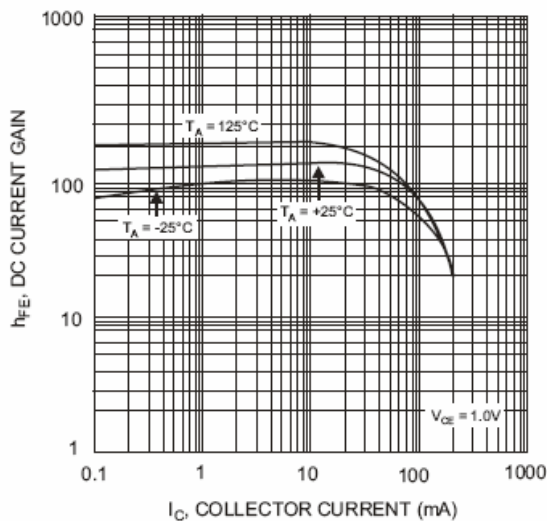


Fig. 3, Typical DC Current Gain vs Collector Current

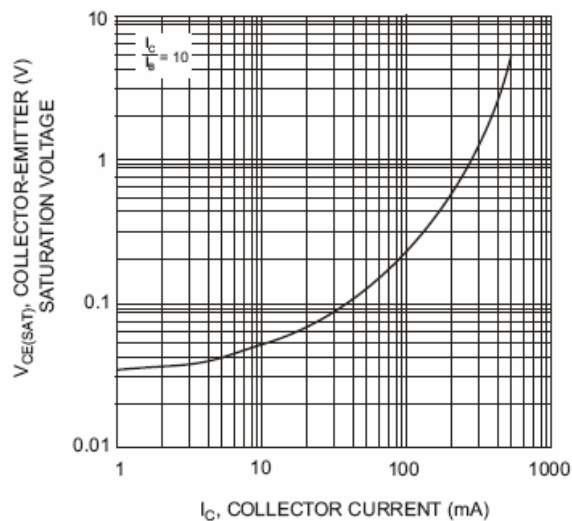


Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

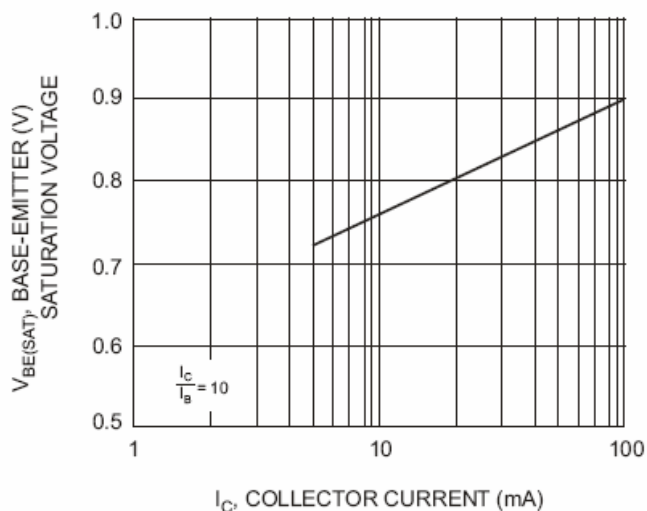


Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.