



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MMDT4401

Features

- Ultra-Small Surface Mount Package
- Epitaxial Planar Die Construction
- Case Material:Molded Plastic. UL Flammability Classification Rating 94-0 and MSL Rating 1
- Marking:K2X

Maximum Ratings @ 25°C Unless Otherwise Specified


Symbol	Rating	Rating(NPN)	Unit
V_{CEO}	Collector-Emitter Voltage	40	V
V_{CBO}	Collector-Base Voltage	60	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	0.6	A
P_C	Collector Dissipation	0.2	W
T_J	Operating Junction Temperature	-55 to +150	°C
T_{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Max	Units
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=1mA$, $I_B=0$)	40	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=100\mu A$, $I_E=0$)	60	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=100\mu A$, $I_C=0$)	6	---	Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB}=50Vdc$, $I_E=0$)	---	0.1	μA
I_{EBO}	Emitter Cutoff Current ($V_{EB}=5Vdc$, $I_C=0$)	---	0.1	μA
h_{FE}	DC Current Gain ($I_C=0.1mA$, $V_{CE}=1Vdc$) ($I_C=1mA$, $V_{CE}=1Vdc$) ($I_C=10mA$, $V_{CE}=1Vdc$) ($I_C=150mA$, $V_{CE}=1Vdc$) ($I_C=500mA$, $V_{CE}=2Vdc$)	20 40 80 100 40	--- --- --- 300 ---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=150mA$, $I_B=15mA$) ($I_C=500mA$, $I_B=50mA$)	---	0.4 0.75	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=150mA$, $I_B=15mA$) ($I_C=500mA$, $I_B=50mA$)	0.75 ---	0.95 1.2	Vdc
f_T	Current Gain-Bandwidth Product ($V_{CE}=10.0Vdc$, $I_C=20mA$, $f=100MHz$)	250	---	MHz
C_{ob}	Output Capacitance ($V_{CB}=5Vdc$, $f=1.0MHz$, $I_E=0$)	---	6.5	pF
t_d	Delay Time $V_{CC}=30V$, $I_C=150mA$, $V_{BE}=2.00V$, $I_{B1}=15.00mA$	---	15	ns
t_r	Rise Time	---	20	ns
t_s	Storage Time $V_{CC}=30V$, $I_C=150mA$, $I_{B1}=-I_{B2}=15mA$	---	225	ns
t_f	Fall Time	---	30	ns

NPN Plastic-Encapsulate Transistors

SOT-363

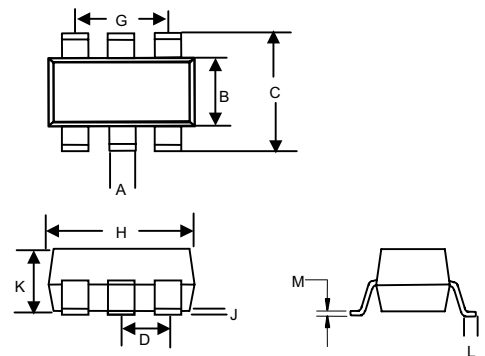

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.006	.014	0.15	0.35	
B	.045	.053	1.15	1.35	
C	.085	.096	2.15	2.45	
D	.026		0.65Nominal		
G	.047	.055	1.20	1.40	
H	.071	.087	1.80	2.20	
J	---	.004	---	0.10	
K	.035	.043	0.90	1.10	
L	.010	.018	0.26	0.46	
M	.003	.006	0.08	0.15	



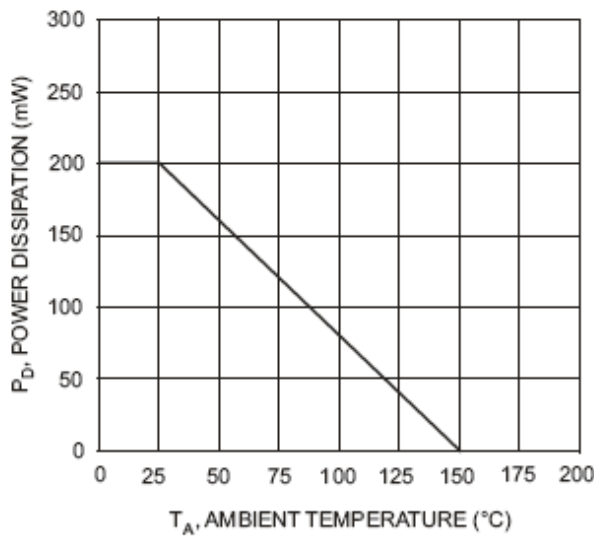


Fig. 1 Max Power Dissipation vs Ambient Temperature

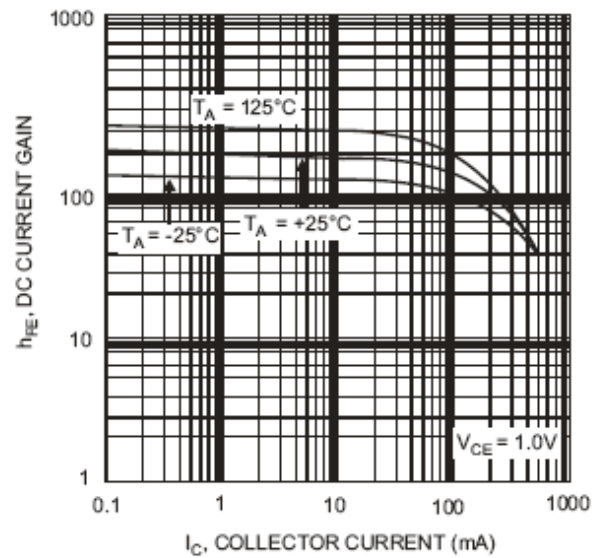


Fig. 2 Typical DC Current Gain vs Collector Current

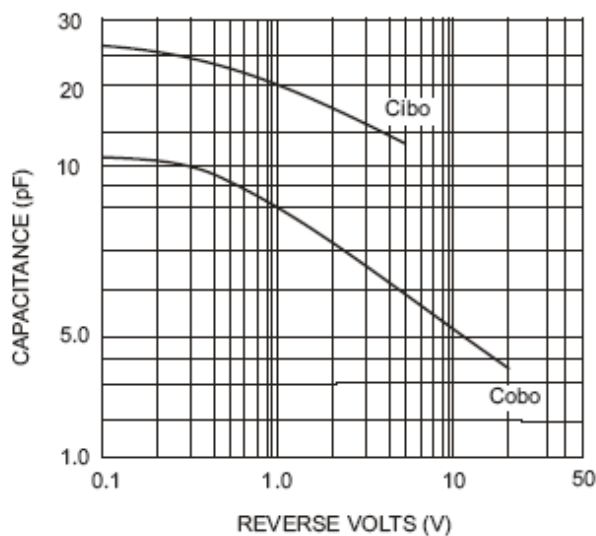


Fig. 3 Typical Capacitance

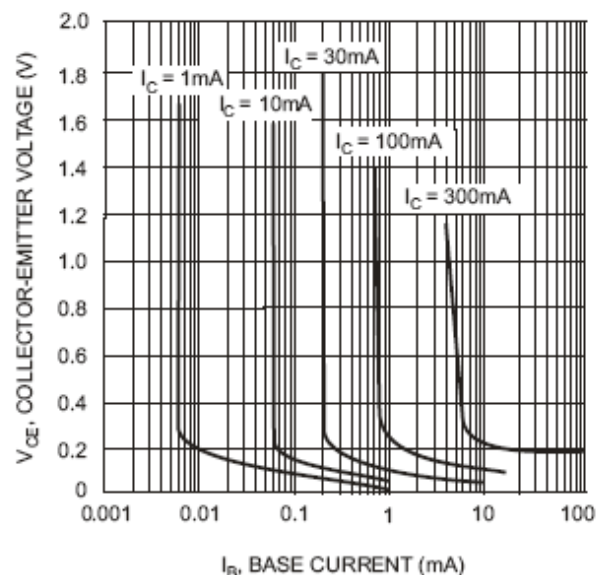


Fig. 4 Typical Collector Saturation Region

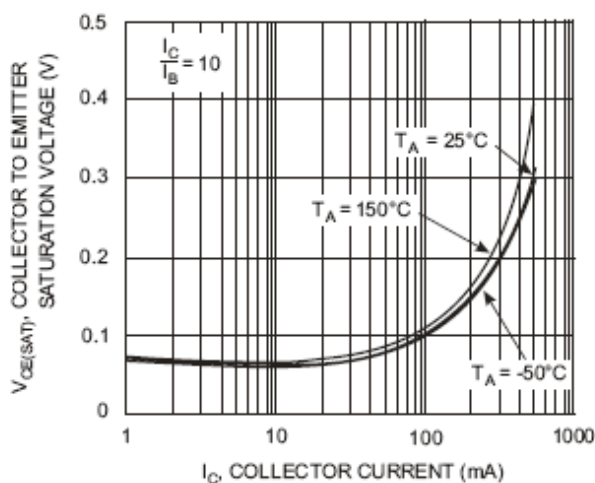


Fig. 5 Collector Emitter Saturation Voltage vs. Collector Current

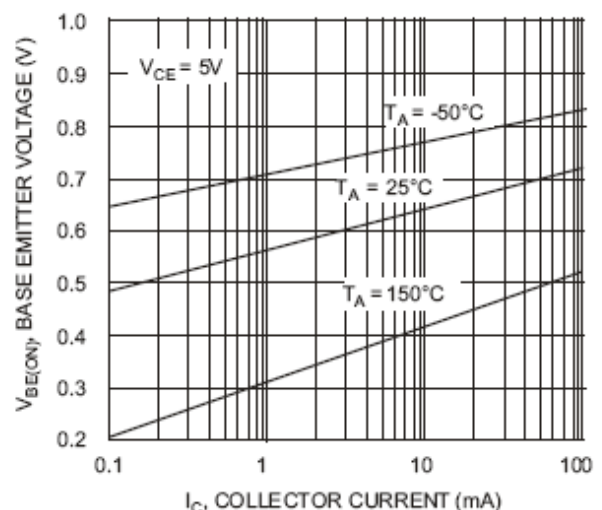


Fig. 6 Base Emitter Voltage vs. Collector Current

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.