


MWA 100 Series

100 Watt Medical Grade Power Supply (Class I)

- Wide Range AC Input
- Fully Regulated DC Output
- High Efficiency
- Output Floating
- Medical Grade Approval
- RoHS Compliant
- 5 Year Warranty
- Class I

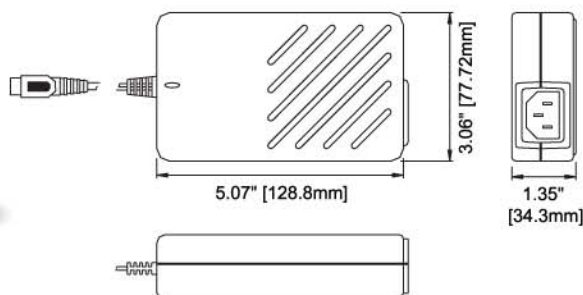

SPECIFICATIONS

INPUT

Voltage	100 - 240 VAC		
Current	3.0 Amp @ 100 VAC		
Frequency	50 - 60 Hz		
Max. Earth Leakage current	Test Voltage	Normal	Single
	132 VAC 60 Hz	80 uA	160 uA
	264 VAC 60 Hz	100 uA	200 uA
Input connector	3-pin IEC 320 input receptacle		

OUTPUT

Total regulation	< +/- 5%
Set point accuracy	< +/- 3% at 60% load
Hold up time	>20 ms min at full load, 115 VAC
Over voltage protection	Built-in
Over current protection	Built-in
Short circuit protection	Pulsing mode, auto recovery
Ripple/noise (Vp-p)	<1% (20 MHz bandwidth)
Output connector	DIN-8
Output cable length	(15/18/24V) = 6ft (+4\"-0\") (12V) = 4ft (+4\"-0\")

PINOUT	1	2	3	4	5	6	7	8
DIN-8	V1	V1	Com	V1	Com	V1	Com	Com



ENVIRONMENTAL

Operating temperature	0° C to 40° C
Storage temperature	-40° C to 85° C
Weight	1.1 lbs

SAFETY

cTUVus
UL 60601-1
CSA C22.2 No.601.1-M90
CB per IEC 60601-1
CE marked to LVD
Class I

EMI/EMC

Emissions	CISPR11 and FCC Part 15, Class B EN61000-3-2, -3
Immunity	EN61000-4-2, -3, -4, -5, -6, -8, -11

Model No.	Volt	Power	Current	Eff @ 115VAC (Typ)
MWA100012A-12A	12V	100W	8.3A	86%
MWA100015A-12A	15V	100W	6.7A	88%
MWA100018A-12A	18V	100W	5.6A	89%
MWA100024A-12A	24V	100W	4.2A	90%