
$$(N-1) \times 5.0$$

Material:

- Solid PIN: Brass(CuZn)
- Surface of solder tail: Tin plated
- Insulator(housing): Thermoplastic (UL94V-0)



RoHS Compliant

PART NUMBER:


OSTOPXX0000

No. of Poles
02: Poles
... ..
24: Poles

Dim A Length	
0	12.5mm (Ø1.3 - (Standard)
1	13.0mm (UpØ1.3 DownØ1.0)
2	12.5mm(UpØ1.3 DownØ1.0)
3	11.5mm(Ø1.3)
4	14.2mm(Ø1.3)
5	17.5mm(Ø1.3)
6	20.0mm(Ø1.3)
7	18.0mm(UpØ1.3 DownØ1.0)
8	16.2mm(UpØ1.3 DownØ1.0)
9	16.5mm(Ø1.3)
A	21.0mm(Ø1.1)
B	10.0mm(Ø1.0)
C	12.7mm(Ø1.1)
D	16.3mm(Ø1.1)
F	12.5×8.8mm Bent pin (Ø1.3)

non-standard may require MOQ

P.C.B. LAYOUT

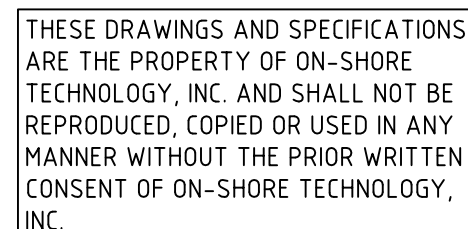

TITLE		OSTOP 5.0mm Series 2p-24p					
PART NO.		OSTOPXX0000		DWG NO.		OSTOPXX0000.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
Shi Jun 2006.10.30	Shi Jun 2006.10.30	Tony 2006.10.30	Tony 2006.10.30		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					REV.: D		X.XX ±0.10
				SHEET: 01/01		X° ±1°	