

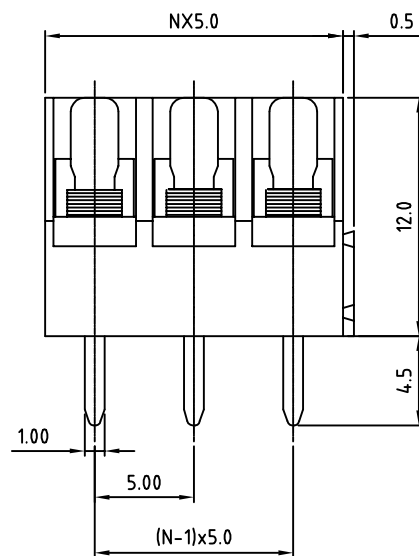




N=Number of contacts

P.C.B LAYOUT

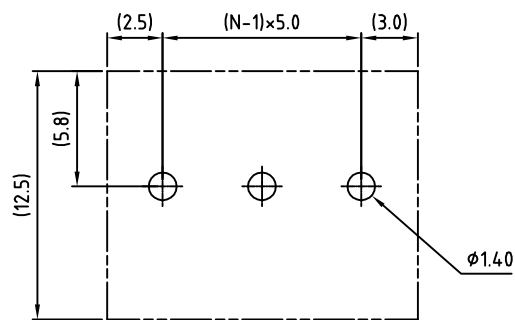

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

SIGN	DATE	DESCRIPTION	APPROVER
	2008.02.02	Current rating changed from 10A to 15A	Jun
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Terminal body
- (metal housing): Brass Machined
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical UL/CSA

- Voltage rating: 300VAC/300VAC
- Current rating: 15A/15A
- Wire range:
 - Solid wire(AWG): 12-22/12-22
 - Stranded wire(AWG): 12-22/12-22
- Torque: 3.5Lb-In/4Kgf.cm
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

PART NUMBER

OSTTGXX01600

No. of Poles ————

02: 2 Poles

03: 3 Poles

... ..

24: 24 Poles

COLOR

0: Black

5: Green

6: Blue (Standard)

8: Grey



TITLE		OSTTG 5.0mm series, short interlock, STANDARD						
PART NO.	OSTTGXX01600			DWG NO.	OSTTGXX01600.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
Shi Jun	Shi Jun	xionghaitao	xionghaitao		UNIT: mm	X. ±0.50		
2006.10.20	2006.10.20	2006.10.20	2006.10.20		SCALE: NONE	X.X ±0.30		
					REV.: F	X.XX ±0.10		
				SHEET: 01/01			X* ±1*	