

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .03$	W $\pm .01$	C $\pm .02$	M $\pm .03$	H $\pm .01$
P10-6F	#6	.75 (19.05)	.31 (7.87)	.22 (5.59)	.55 (13.97)	.15 (3.81)
P10-8F	#8	.78 (19.81)	.37 (9.40)	.22 (5.59)	.55 (13.97)	.17 (4.32)
P10-10F	#10	.78 (19.81)	.37 (9.40)	.23 (5.84)	.55 (13.97)	.20 (5.08)
P10-14F	1/4"	.89 (22.61)	.50 (12.7)	.30 (7.62)	.60 (15.24)	.27 (6.86)

NOTES:


- UL LISTED AND CSA CERTIFIED FOR:
A. #12-10 AWG SOLID OR STRANDED
COPPER WIRE
B. 302° F (150° C) MAX. TEMP. RATING
- MATERIAL:
A. STAMPING - .04" (1.02) THK COPPER,
TIN PLATED
- PACKAGE QTY: STD. PKG.-L=50
BULK PKG.-D=500
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS:
A. UL LISTED AND CSA CERTIFIED: CT-100,
CT-200, CT-570, CT-1570
B. PANDUIT APPROVED: CT-160, CT-260
- WIRE STRIP LENGTH:
9/32" $\pm 1/32$ (7.1 $\pm .8$)



LISTED
587H
E52164



CERTIFIED
LR31212

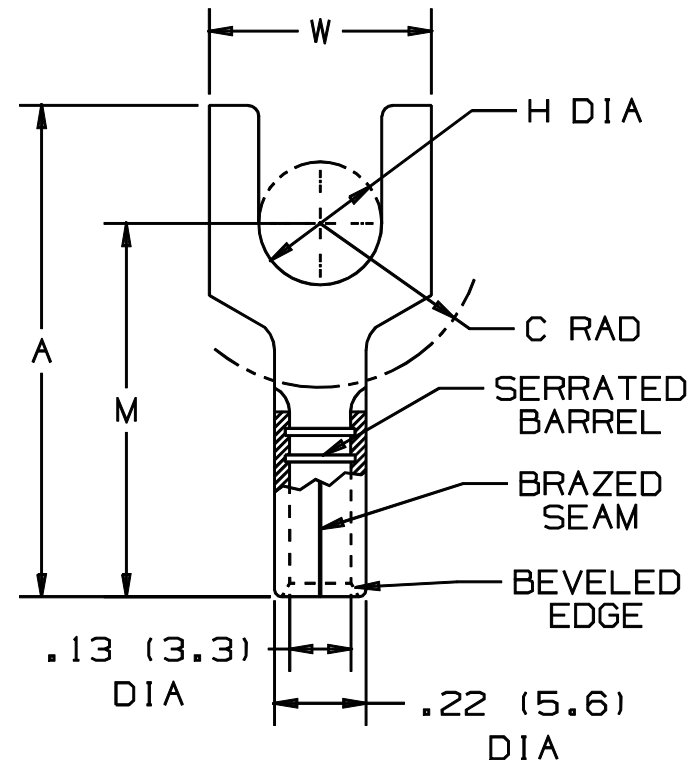

A41256_06

06	1/01	RM		FILESPEC WAS N41256AA_PCD_05				 PANDUIT CORP. TINLEY PARK, ILLINOIS			
05		JKD		ADDED CT-1570 TOOL	07632						
4	1-95	MS	RLS	UPDATED NOTES AND DIMENSIONS	02942	LCA	TFKE				
3	7-88	DW	CH	REDRAWN WITH REVISIONS			JRB	#12-10 BARREL NON-INSULATED FORK			
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY DAW	CHK'D CJH	SCALE	DRAWING NO. A41256