



1		
Description	Material	Finish
Body	Brass	Gold
Pin	PH Bronze	Gold
Insulation	Teflon	Teflon
Crimp Ring	Brass	Gold
Nut	Brass	Gold
Washer	Brass	Gold


RECOMMENDED CABLE STRIPPING DIMENSIONS

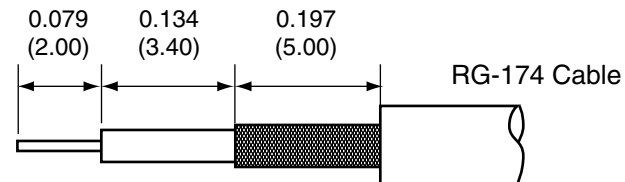


SIDE VIEW

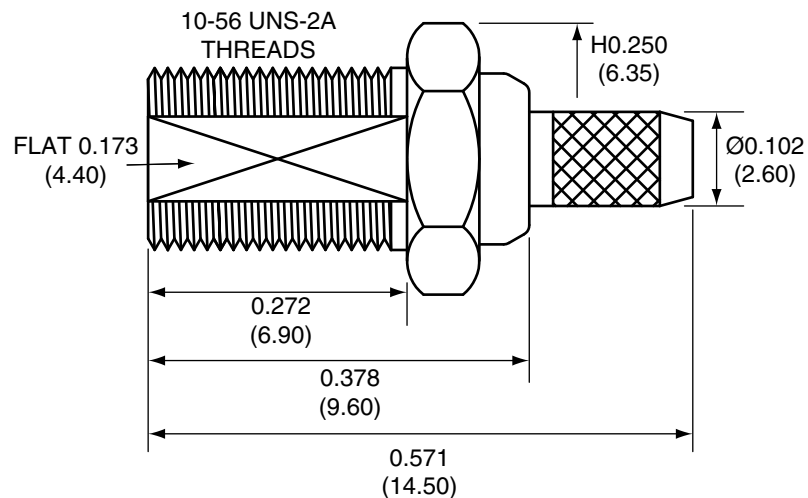


PIN




CRIMP RING

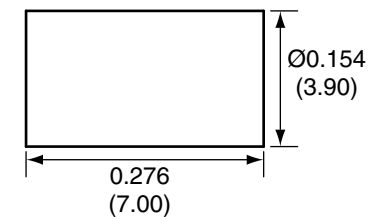


NUT

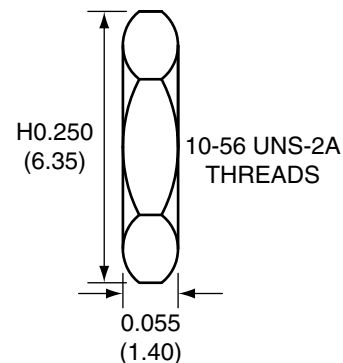

WASHER



RECOMMENDED MOUNTING HOLE

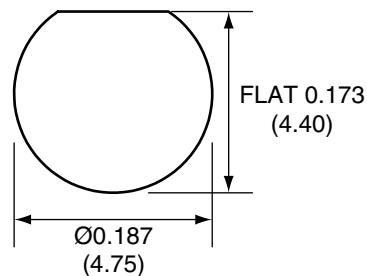

CONREVMCX005 ASSEMBLY INSTRUCTIONS

1. Solder the pin to the center conductor.
2. Insert the pin, center conductor, and insulator into the body until the pin snaps in.
3. Wrap the braid around the tail of the body and crimp the ring with a hex crimp tool.

Title RP-MCX FEMALE BULKHEAD MOUNT CABLE END CRIMP FOR RG174 CABLE	
Part No. CONREVMCX005	Revision: 1.0
Dimensions: INCHES (mm)	Date: 6/5/2006

CONNECTOR CITY
159 ORT LANE
MERLIN, OR 97532
PH (541)-471-6256
FAX (541)-471-6251

CONNECTOR CITY
THE VALUE OF CONNECTIONS

Sheet 1 of 1