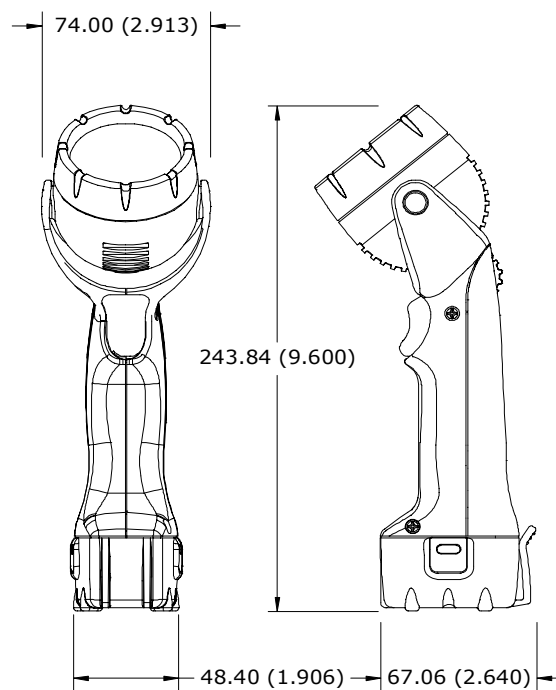


**IN421**  
**Contractor® Flashlight****Specifications**


|                        |                                                 |
|------------------------|-------------------------------------------------|
| <b>Designation:</b>    | Energizer Flashlight                            |
| <b>Power Source:</b>   | Four AA Size Batteries<br>(ANSI/NEDA 15 Series) |
| <b>Configuration:</b>  | Series - Parallel Circuit                       |
| <b>Lamp:</b>           | No. KPR-102<br>(Rated at 2.4V, 0.7A)            |
| <b>Lamp Life:</b>      | Rated at 15 Hours                               |
| <b>Lamp Output:</b>    | Rated at 16.5 Lumens                            |
| <b>Typical Weight:</b> | 181 grams (6.4 oz.)<br>(without batteries)      |

**Physical Dimensions**  
mm (inches)**Features**

Swivel Head Rotates 180°  
Belt Clip  
Trigger Switch  
Soft Ergonomic Grip  
Krypton Bulb

**Typical Battery Service**

350 mA Continuous  
at 21°C (70°F)

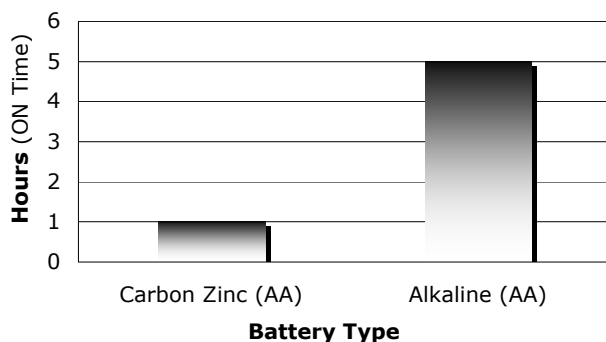**Typical Battery Service to 0.9V (per battery) at 21°C (70°F)**

| <u>Schedule</u>   | <u>Battery Type</u> | <u>Hours (ON Time)</u> |
|-------------------|---------------------|------------------------|
| 350 mA Continuous | 1215                | 1.0                    |
| 350 mA Continuous | E91                 | 5.0                    |

**Important Notice**

This datasheet contains information specific to flashlights manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright Eveready Battery Co. Inc. - All Rights Reserved