


CIRCUIT SIZE	DIM. 'A'	DIM. 'B'	DIM. 'C'
2	—	.21 (5.4)	.370 (9.40)
4	.17 (4.2)	.38 (9.6)	.535 (13.60)
6	.33 (8.4)	.54 (13.8)	.701 (17.80)
8	.50 (12.6)	.71 (18.0)	.866 (22.00)
10	.66 (16.8)	.87 (22.2)	1.031 (26.20)
12	.83 (21.0)	1.04 (26.4)	1.197 (30.40)
14	.99 (25.2)	1.20 (30.6)	1.362 (34.60)
16	1.16 (29.4)	1.37 (34.8)	1.528 (38.80)
18	1.32 (33.6)	1.54 (39.0)	1.693 (43.00)
20	1.49 (37.8)	1.70 (43.2)	1.858 (47.20)
22	1.65 (42.0)	1.87 (47.4)	2.024 (51.40)
24	1.82 (46.2)	2.03 (51.6)	2.189 (55.60)

NOTES:

- HOUSING MATERIAL:
 "BLANK" - NYLON 6/6, U.L. 94V-2, COLOR: NATURAL.
 210 - NYLON 6/6, U.L. 94V-0, COLOR: NATURAL.
 BL - NYLON 6/6, U.L. 94V-2, COLOR: DYED BLACK.
 - TERMINAL MATERIAL: BRASS ALLOY 260
 - PART MATES WITH MINI-FIT JR. RECEPTACLE #5557.
 - PACKAGING: SEE CHARTS
 - MOUNTING OPTIONS:
 "BLANK" - NO MOUNTING (SEE SD-5566-NA AND -NB SERIES DWGS.)
 2 - PEG MOUNT
 - TERMINAL PLATING:
 "BLANK" - .000035/(.00090) MIN. TIN OVER .000020/(.00050) MIN. COPPER.
 *GS - .000030/(.00076) MIN. SELECT GOLD .000100/(.00254) MIN. SELECT MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.
 *GS2 - .000015/(.00038) MIN. SELECT GOLD AND .000100/(.00254) MIN. SELECT MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.
 S - .000100/(.00254) MIN. TIN OVER .000050/(.00127) MIN. NICKEL.
- *THE PRIMARY SHIPPING CARTON WILL BE LABELED 'COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC.'
 *CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.
- PRODUCT SPECIFICATION AND PROCESSING PARAMETERS: SEE PS-5556-001
 - ANTI-SHINGLING RIB MAY OR MAY NOT APPEAR ON HOUSINGS.
 - CONNECTORS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
 - PARTS ARE NOT DESIGNED FOR CURRENT SHARING.

RECOMMENDED HOLE LAYOUT FOR .070/(1.78) MAX. THICK P. C. BOARD
 VIEWED FROM COMPONENT SIDE

LEGEND:

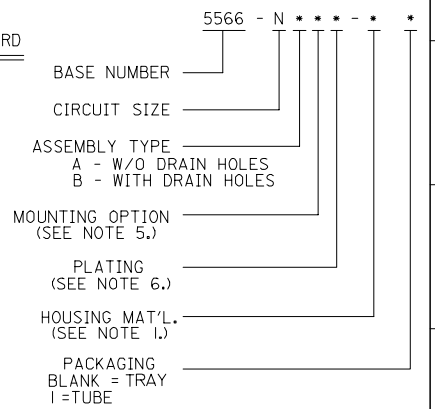

4	0
3	0
2	0
1	R1
SHT. REV.	

REVISED NOTES 8 EC NO: UICP2006-2601 DRAWN: ADRIAN NOL 2006/05/11 CHKD: G POLGAR 2006/05/13 APPR: J COMERCIAL 2006/05/15 R1	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .015 2 PLACES ± 0.38 ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2°	DIMENSION STYLE IN/MM DRAWN BY DATE RJF 8/19/87 CHECKED BY DATE GT 8/19/87 APPROVED BY DATE RAS 8/19/87	SCALE 4:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE MINI-FIT JR. VERTICAL HEADER ASSEMBLIES WITH MOUNTING PEGS MOLEX MOLEX INCORPORATED MATERIAL NO. DOCUMENT NO. SDA-5566-N*2*-*	SHEET NO. 1 OF 4	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHTS 2-4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

	13	12	11	10	9	8	7	6	5	4	3	2	1											
J	PLATING:			100 M.I. TIN			PLATING:			100 M.I. TIN			PLATING:			15 M.I. SELECT GOLD			PLATING:			15 M.I. SELECT GOLD		
	DRAIN HOLES:			WITHOUT DRAIN HOLES			DRAIN HOLES:			WITHOUT DRAIN HOLES			DRAIN HOLES:			WITHOUT DRAIN HOLES			DRAIN HOLES:			WITHOUT DRAIN HOLES		
	MTG. OPTION:			WITH PEGS			MTG. OPTION:			WITH PEGS			MTG. OPTION:			WITH PEGS			MTG. OPTION:			WITH PEGS		
	HOUSING MAT'L:			NYLON 6/6 94V-2 NATURAL			HOUSING MAT'L:			NYLON 6/6 94V-2 NATURAL			HOUSING MAT'L:			NYLON 6/6 94V-2 NATURAL			HOUSING MAT'L:			NYLON 6/6 94V-2 NATURAL		
PACKAGING:			TRAY			PACKAGING:			TRAY			PACKAGING:			TRAY			PACKAGING:			TRAY			
I	PART NO.	ENG NO.	CKTS		PART NO.	ENG NO.	CKTS		PART NO.	ENG NO.	CKTS		PART NO.	ENG NO.	CKTS									
	39-30-6025	5566	-02A2S	2	39-30-6026	5566	-02A2S-210	2	39-30-0026	5566	-02A2GS2	2	39-30-0027	5566	-02A2GS2-210	2								
	39-30-6045	5566	-04A2S	4	39-30-6046	5566	-04A2S-210	4	39-30-0046	5566	-04A2GS2	4	39-30-0047	5566	-04A2GS2-210	4								
	39-30-6065	5566	-06A2S	6	39-30-6066	5566	-06A2S-210	6	39-30-0066	5566	-06A2GS2	6	39-30-0067	5566	-06A2GS2-210	6								
	39-30-6085	5566	-08A2S	8	39-30-6086	5566	-08A2S-210	8	39-30-0086	5566	-08A2GS2	8	39-30-0087	5566	-08A2GS2-210	8								
	39-30-6105	5566	-10A2S	10	39-30-6106	5566	-10A2S-210	10	39-30-0106	5566	-10A2GS2	10	39-30-0107	5566	-10A2GS2-210	10								
	39-30-6125	5566	-12A2S	12	39-30-6126	5566	-12A2S-210	12	39-30-0126	5566	-12A2GS2	12	39-30-0127	5566	-12A2GS2-210	12								
	39-30-6145	5566	-14A2S	14	39-30-6146	5566	-14A2S-210	14	39-30-0146	5566	-14A2GS2	14	39-30-0147	5566	-14A2GS2-210	14								
	39-30-6165	5566	-16A2S	16	39-30-6166	5566	-16A2S-210	16	39-30-0166	5566	-16A2GS2	16	39-30-0167	5566	-16A2GS2-210	16								
	39-30-6185	5566	-18A2S	18	39-30-6186	5566	-18A2S-210	18	39-30-0186	5566	-18A2GS2	18	39-30-0187	5566	-18A2GS2-210	18								
H	39-30-6205	5566	-20A2S	20	39-30-6206	5566	-20A2S-210	20	39-30-0206	5566	-20A2GS2	20	39-30-0207	5566	-20A2GS2-210	20								
	39-30-6225	5566	-22A2S	22	39-30-6226	5566	-22A2S-210	22	39-30-0226	5566	-22A2GS2	22	39-30-0227	5566	-22A2GS2-210	22								
	39-30-6245	5566	-24A2S	24	39-30-6246	5566	-24A2S-210	24	39-30-0246	5566	-24A2GS2	24	39-30-0247	5566	-24A2GS2-210	24								
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-								

G	PLATING:			100 M.I. TIN			PLATING:			100 M.I. TIN			PLATING:			15 M.I. SELECT GOLD			PLATING:			15 M.I. SELECT GOLD		
	DRAIN HOLES:			WITH DRAIN HOLES			DRAIN HOLES:			WITH DRAIN HOLES			DRAIN HOLES:			WITH DRAIN HOLES			DRAIN HOLES:			WITH DRAIN HOLES		
	MTG. OPTION:			WITH PEGS			MTG. OPTION:			WITH PEGS			MTG. OPTION:			WITH PEGS			MTG. OPTION:			WITH PEGS		
	HOUSING MAT'L:			NYLON 6/6 94V-2 NATURAL			HOUSING MAT'L:			NYLON 6/6 94V-2 NATURAL			HOUSING MAT'L:			NYLON 6/6 94V-2 NATURAL			HOUSING MAT'L:			NYLON 6/6 94V-2 NATURAL		
PACKAGING:			TRAY			PACKAGING:			TRAY			PACKAGING:			TRAY			PACKAGING:			TRAY			
F	PART NO.	ENG NO.	CKTS		PART NO.	ENG NO.	CKTS		PART NO.	ENG NO.	CKTS		PART NO.	ENG NO.	CKTS									
	39-30-6027	5566	-02B2S	2	39-30-6028	5566	-02B2S-210	2	39-30-0028	5566	-02B2GS2	2	39-30-0029	5566	-02B2GS2-210	2								
	39-30-6047	5566	-04B2S	4	39-30-6048	5566	-04B2S-210	4	39-30-0048	5566	-04B2GS2	4	39-30-0049	5566	-04B2GS2-210	4								
	39-30-6067	5566	-06B2S	6	39-30-6068	5566	-06B2S-210	6	39-30-0068	5566	-06B2GS2	6	39-30-0069	5566	-06B2GS2-210	6								
	39-30-6087	5566	-08B2S	8	39-30-6088	5566	-08B2S-210	8	39-30-0088	5566	-08B2GS2	8	39-30-0089	5566	-08B2GS2-210	8								
	39-30-6107	5566	-10B2S	10	39-30-6108	5566	-10B2S-210	10	39-30-0108	5566	-10B2GS2	10	39-30-0109	5566	-10B2GS2-210	10								
	39-30-6127	5566	-12B2S	12	39-30-6128	5566	-12B2S-210	12	39-30-0128	5566	-12B2GS2	12	39-30-0129	5566	-12B2GS2-210	12								
	39-30-6147	5566	-14B2S	14	39-30-6148	5566	-14B2S-210	14	39-30-0148	5566	-14B2GS2	14	39-30-0149	5566	-14B2GS2-210	14								
	39-30-6167	5566	-16B2S	16	39-30-6168	5566	-16B2S-210	16	39-30-0168	5566	-16B2GS2	16	39-30-0169	5566	-16B2GS2-210	16								
	39-30-6187	5566	-18B2S	18	39-30-6188	5566	-18B2S-210	18	39-30-0188	5566	-18B2GS2	18	39-30-0189	5566	-18B2GS2-210	18								
E	39-30-6207	5566	-20B2S	20	39-30-6208	5566	-20B2S-210	20	39-30-0208	5566	-20B2GS2	20	39-30-0209	5566	-20B2GS2-210	20								
	39-30-6227	5566	-22B2S	22	39-30-6228	5566	-22B2S-210	22	39-30-0228	5566	-22B2GS2	22	39-30-0229	5566	-22B2GS2-210	22								
	39-30-6247	5566	-24B2S	24	39-30-6248	5566	-24B2S-210	24	39-30-0248	5566	-24B2GS2	24	39-30-0249	5566	-24B2GS2-210	24								
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-								
D	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-								
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-								

B	C	A	REV. PACKAGING EC NO. UCP2006-1448 DRAWNDUNNE 2005/12/21 CHKD:GPOJGER 2005/12/21 APPR:ICOMERC.L 2005/12/22 DESCRIPTION	QUALITY SYMBOLS	$\nabla=0$ $\nabla=0$	GENERAL TOLERANCES (UNLESS SPECIFIED)	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .015 1 PLACE ± 0.38 ± --- ANGULAR ±1/2°	DIMENSION STYLE	IN/MM	DRAWN BY	DATE	TITLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
				DRAWN BY LEM CHECKED BY MAB APPROVED BY RRE	DATE 2/17/99 DATE 2/17/99 DATE 2/17/99	MINI-FIT JR VERT. HEADER ASSEMBLIES WITH MOUNTING PEGS MOLEX INCORPORATED	1:1 METRIC								
				MATERIAL NO.	DOCUMENT NO.	SHEET NO.									
				SEE CHART	SDA-5566-N*2*-*	3									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									