
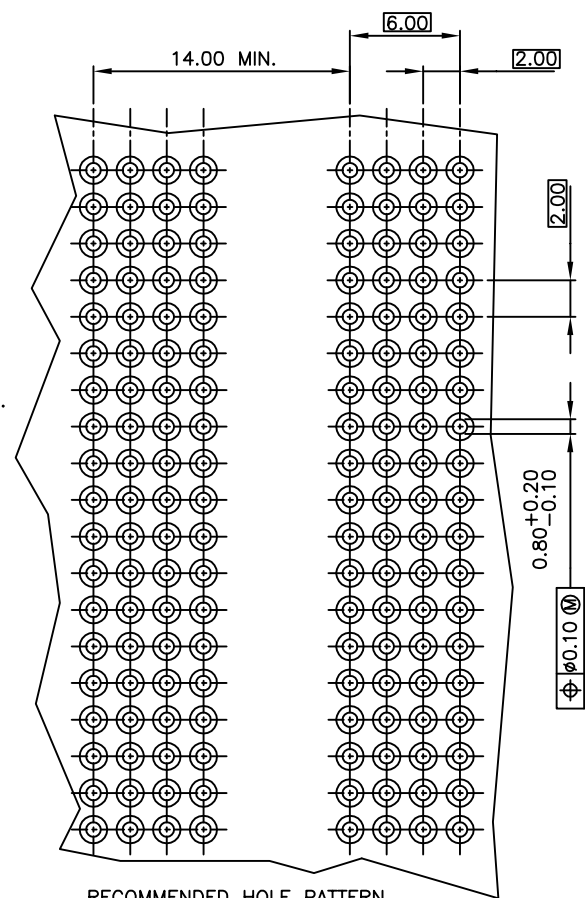
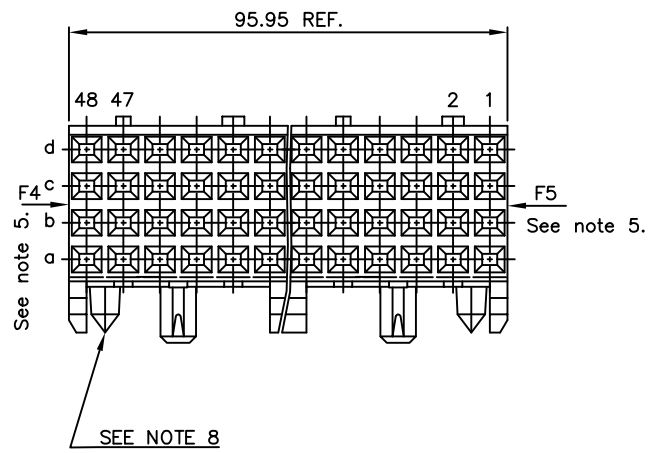



All rights strictly reserved. Reproduction or issue in third parties in any form from FCI Electronics is prohibited without written authority from the proprietor.
Alle rechten strikt voorbehouden. Reproductie of issue in derde partijen in welke vorm ook is niet toegestaan zonder schriftelijke toestemming van de afzender.
Tous droits strictement réservés. Reproduction ou communication à tiers sans autorisation écrite de l'émetteur.
FCI Electronics

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

PRODUCT NR.	DIM "A"
88957-X01	5.00 REF.
88957-X11	3.35 REF.
88957-X01LF	5.00 REF.
88957-X11LF	3.35 REF.

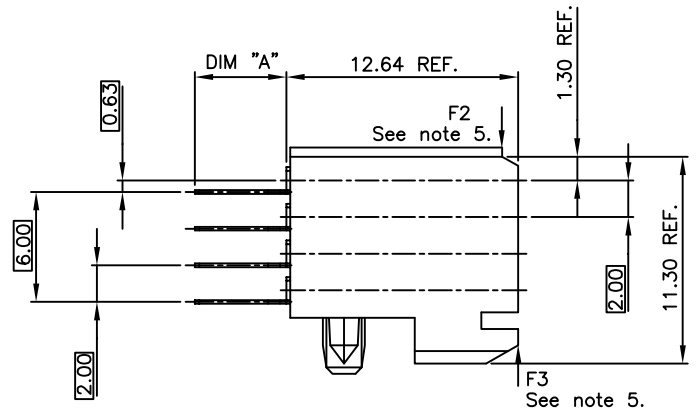

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

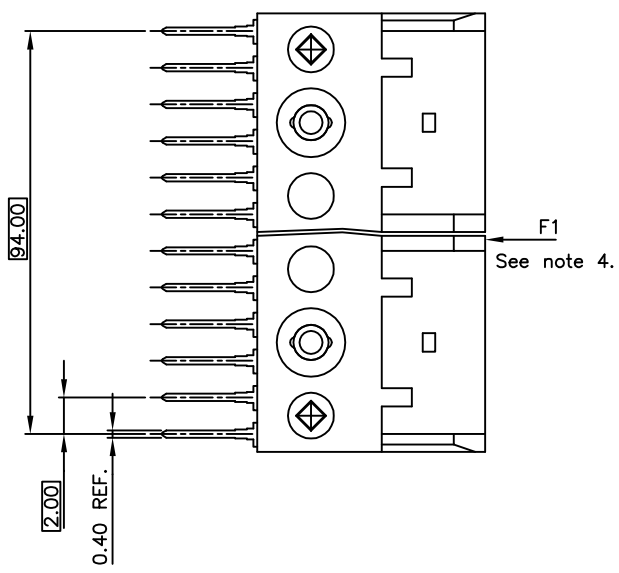

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR PURE Sn FOR LF.
4. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 100 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
H	0607-0170	dr	25/22/07	Linear		projection		www.fciconnect.com	
J	0608-0171	TER	8/26/08					STR FEMALE STB	
-	-	-	-	angles				SIGNAL 96MM	
D	H30732	HBO	931119	dr	A van Zanten	910809	mm	product family	METRAL (tm)
E	H40355	DOB	940527	engr	H.Bouwknegt	931122		code	213
F	V91450	DOB	990827	chr	P.Schalk	910809	scale	5:1	
G	0605-0485	CLU	051115	app	van Woensel	911227			
sheet	revision	J							
index	sheet	1							