

Features


- Low Forward Voltage Drop
- Excellent High Temperature Stability
- Patented Super Barrier Rectifier Technology
- Soft, Fast Switching Capability
- **Lead Free Finish, RoHS Compliant (Note 2)**
- **“Green” Molding Compound (No Br, Sb)**

Mechanical Data

- Case: DPAK (TO-252)
- Case Material: Molded Plastic, UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Matte Tin Finish annealed over Copper leadframe. Solderable per MIL-STD-202, Method 208
- Marking Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.33 grams (approximate)



Top View



Polarity

Maximum Ratings @T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitance load, derate current by 20%.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	45	V
Working Peak Reverse Voltage	V _{RWM}		
DC Blocking Voltage	V _{RM}		
RMS Reverse Voltage	V _{R(RMS)}	32	V
Average Rectified Output Current @ T _C = 140°C	I _O	10	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	90	A

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Maximum Thermal Resistance	R _{θJA}	29	°C/W
Thermal Resistance Junction to Ambient (Note 3)			
Thermal Resistance Junction to Case (Note 3)	R _{θJC}	3	
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150	°C

Electrical Characteristics @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	V _{(BR)R}	45	-	-	V	I _R = 0.45mA
Forward Voltage Drop (per leg)	V _F	-	0.42	0.48	V	I _F = 5A, T _J = 25°C
		-	0.37	0.41		I _F = 5A, T _J = 125°C
		-	-	0.58		I _F = 10A, T _J = 25°C
		-	0.50	0.56		I _F = 10A, T _J = 125°C
Leakage Current (Note 2)	I _R	-	50	500	μA	V _R = 45V, T _J = 25°C
		-	12	40	mA	V _R = 45V, T _J = 125°C
Total Capacitance	C _T	-	400	-	pF	V _R = 5V, f = 1MHz T _J = 25°C

- Notes:
1. Short duration pulse test used to minimize self-heating effect.
 2. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied, see *EU Directive 2002/95/EC Annex Notes*.
 3. Device mounted on polyimide substrate, 240mm² Copper pad, double-sided PC Board.







SBR is a registered trademark of Diodes Incorporated.

SBR1045D1

Document number: DS31374 Rev. 4 - 2

1 of 3
www.diodes.com

July 2008
 © Diodes Incorporated

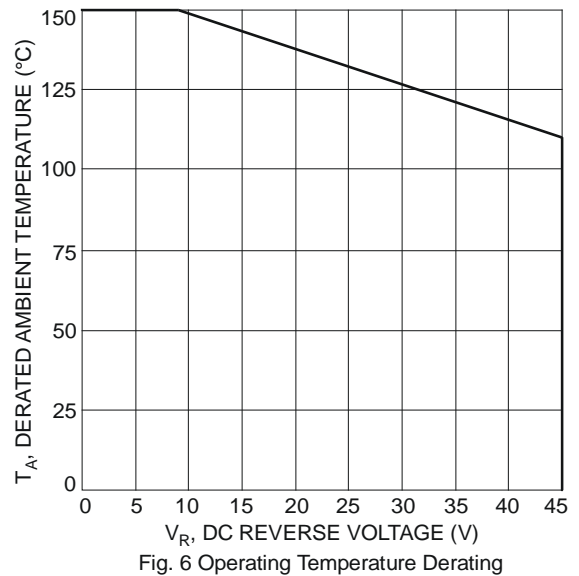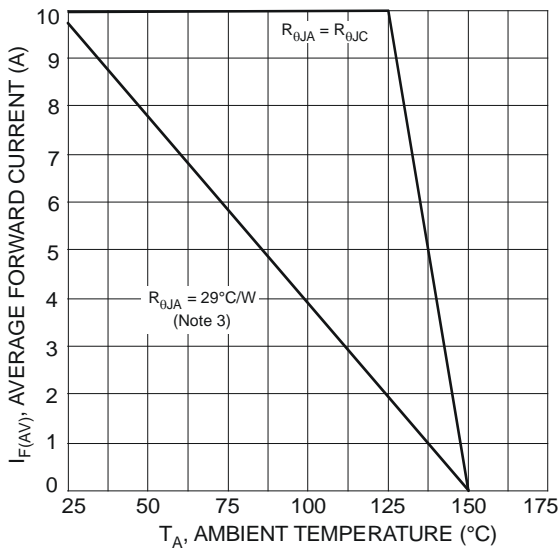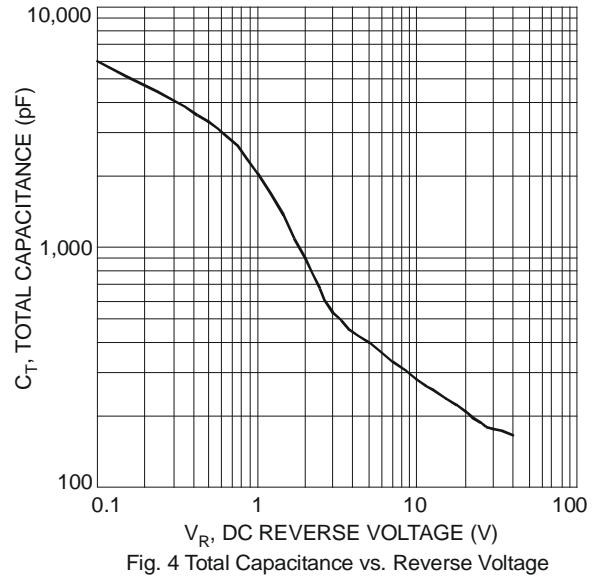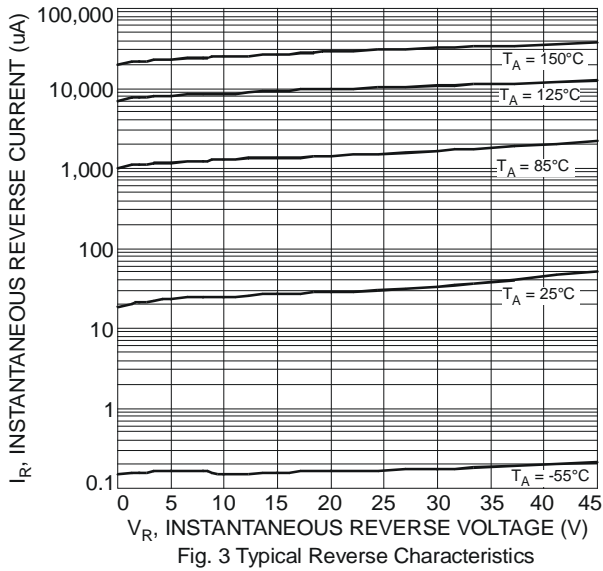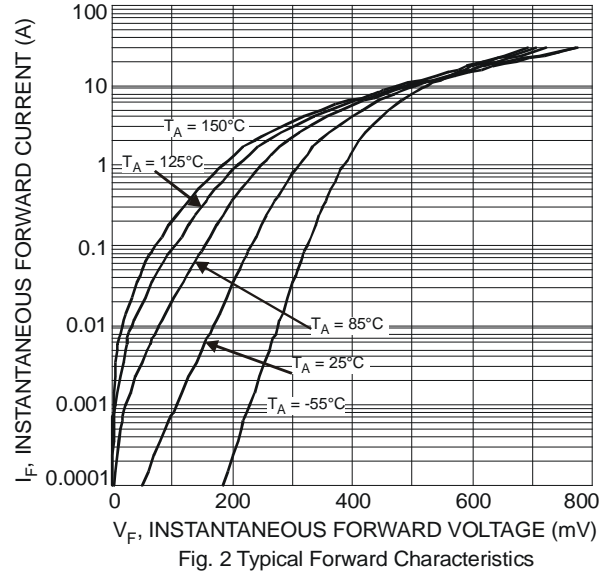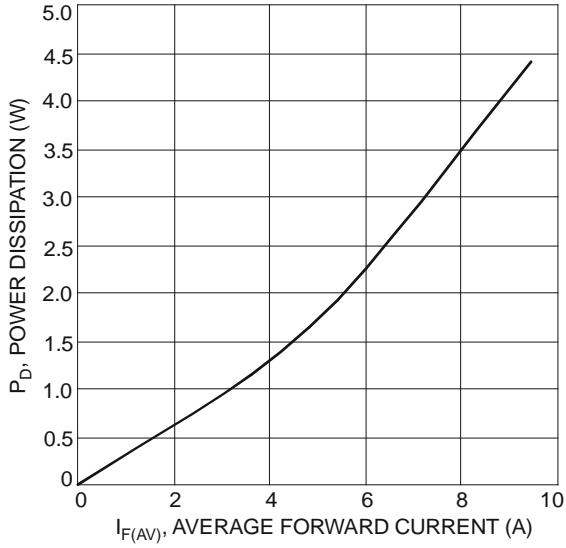

SBR is a registered trademark of Diodes Incorporated.

SBR1045D1


Document number: DS31374 Rev. 4 - 2

Ordering Information (Note 3)

Part Number	Case	Packaging
SBR1045D1-13	DPAK (TO-252)	80 pieces/tube 2500/Tape & Reel, 13-inch


Notes: 3. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information




SBR1045 = Product Type Marking Code
 AB = Foundry and Assembly Code
 YYWW = Date Code Marking
 YY = Last two digits of year, ex: 08 = 2008
 WW = Week (01-52)

Package Outline Dimensions

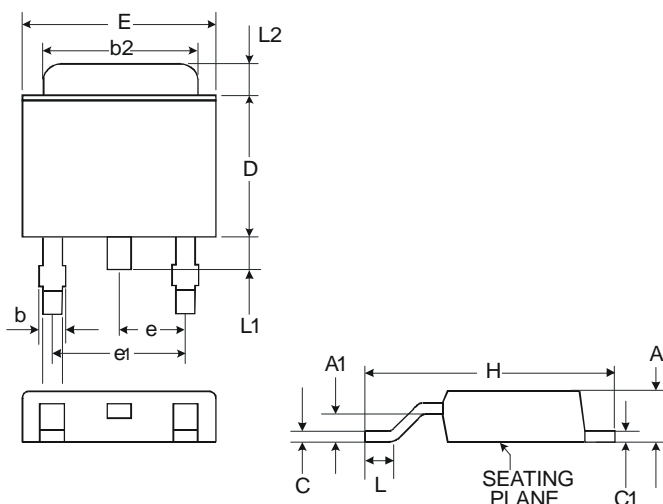

DPAK		
Dim	Min	Max
A	2.18	2.40
A1	0.89	1.14
b	0.61 Typ.	
b2	5.20	5.50
C	0.45	0.58
C1	0.45	0.58
D	5.40	6.20
E	6.35	6.80
e	2.28 Typ.	
e1	4.57 Typ.	
H	9.00	10.40
L	0.51	—
L1	0.64	1.02
L2	0.88	1.27
All Dimensions in mm		

Suggested Pad Layout

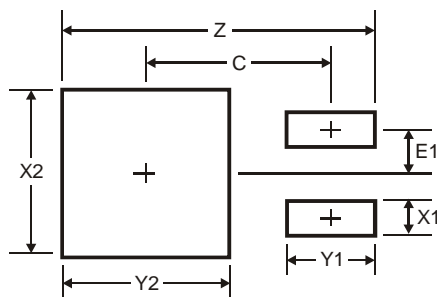

Dimensions	Value (in mm)
Z	11.6
X1	1.5
X2	7.0
Y1	2.5
Y2	7.0
C	6.9
E1	2.3

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

SBR is a registered trademark of Diodes Incorporated.

SBR1045D1

Document number: DS31374 Rev. 4 - 2

3 of 3

www.diodes.com

July 2008

© Diodes Incorporated