

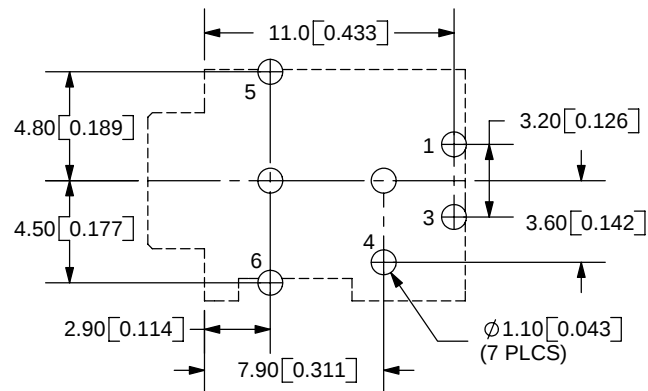
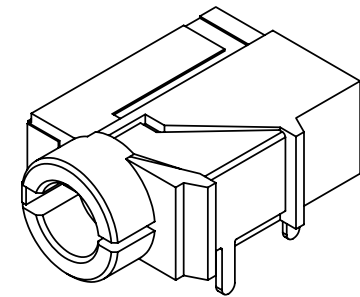
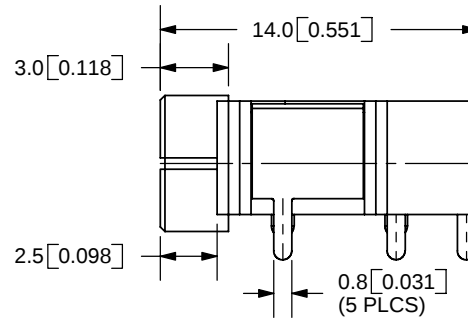


REV.	DESCRIPTION	DATE
A	NEW DRAWING	9/12/2006

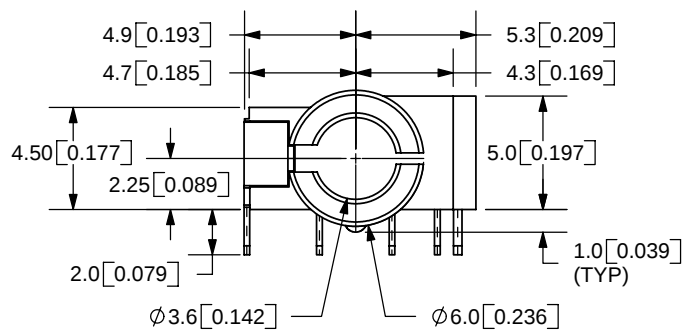

PCB LAYOUT
TOP VIEW

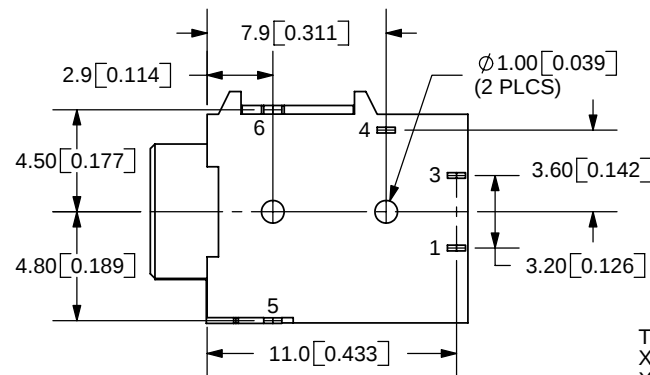

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm



MODEL NO.	SJ-43515TS
SCHEMATIC	

SPECIFICATIONS:
 RATING: 16V DC @ 300mA
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES

	MATERIAL	PLATING
TERMINAL 1	PBS	Tin
TERMINAL 3	Brass	Tin
TERMINAL 4	Ti-Cu Alloy	Tin
TERMINAL 5	PBS	Gold
TERMINAL 6	PBS	Tin
BUSHING	Brass	Nickel
HOUSING	PBT	



CUI INC

20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

TITLE:	AUDIO JACK W/4 CONDUCTORS 3.5mm	REV:	A
PART NO.	SJ-43515TS	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
		SCALE:	3:1

PC FILE NAME:
SJ-43515TS

COPYRIGHT 2006 BY CUI INC.