
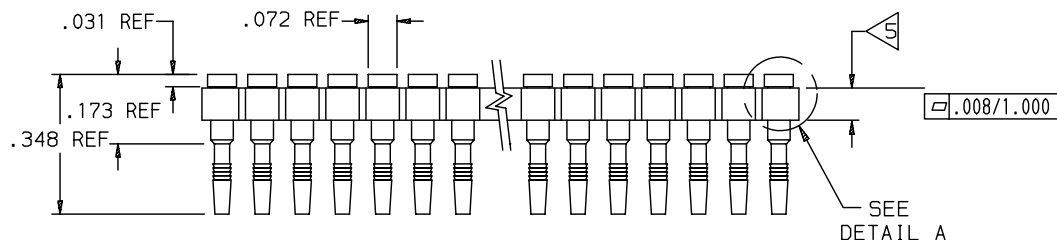



XXX	STYLE	SEE SHEET
998ELF	"A"	1
998ZLF	"B"	2

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in G5-22-008.
- Packaging spec: see G5-14-920

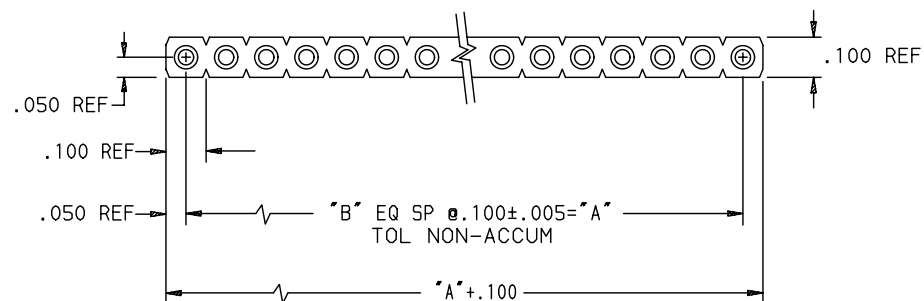

STYLE "A"



NOTES:


1. CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD, PER ASTM B16.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172, PER ASTM B194.
2. CONTACT PLATING:
OUTER SHELL: 80u" TO 120u" TIN/LEAD PER SAE AMS-P-81728,
OUTER SHELL: 80u" TO 120u" TIN for LEAD FREE VERSION
OVER 100u" TO 200u" NICKEL PER QQ-N-290.
INNER CONTACT: 200u" TIN/LEAD PER SAE AMS-P-81728,
INNER CONTACT: 200u" TIN for LEAD FREE VERSION
OVER 50u" NICKEL PER QQ-N-290.
3. NUMBER OF CONTACTS PER ROW (01 to 18).
4. RECOMMENDED PCB THRU HOLE DIA. .040±.003
5. INSULATOR THICKNESS MAY BE .080 OR .100.
6. INSULATOR MATERIAL:
BLACK GLASS FILLED POLYESTER (PCT)

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/29
J	LS07-0299	HLE	2007/11/21
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
-	-	-	-
F	LS06-0189	HLE	2006/11/20
G	LS07-0141	HLE	2007/05/21

www.fciconnect.com			surface ISO 1302 		tolerance std ISO 406 ISO 1101		projection 		INCH 		
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	D-WOLFORD	2000/10/01	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 1:1			
Eng	A-VASBINDER	2000/10/01			0.XX	±0.1					
Chr	A-VASBINDER	2000/10/01			0.XXX	±0.1					
Appr	A-VASBINDER	2000/10/01	Product family				SOCKET		Spec ref -		
			SINGLE ROW SIP COMPLIANT PRESS FIT				dwg no 58808		Rev. L		
catalog no			SEE TABLE				CUSTOMER		sheet 1 of 2		

1 2 3 4

A

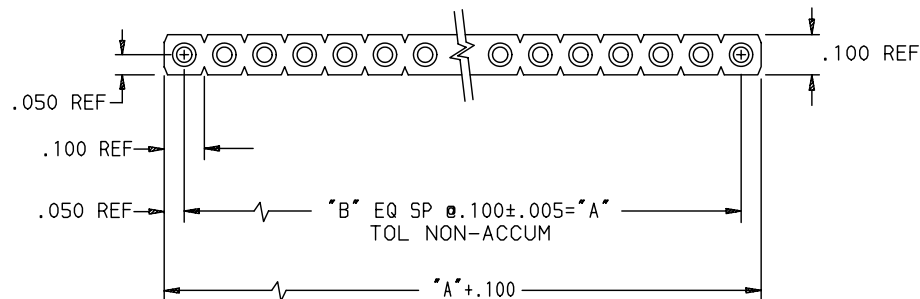



NOTE 4 TYP

NO. OF SPACES
X .100

.100±.005 TYP
NON ACCUM.

THIS HOLE PATTERN APPLIES TO BOTH
STYLE A AND STYLE B CONTACTS.

B

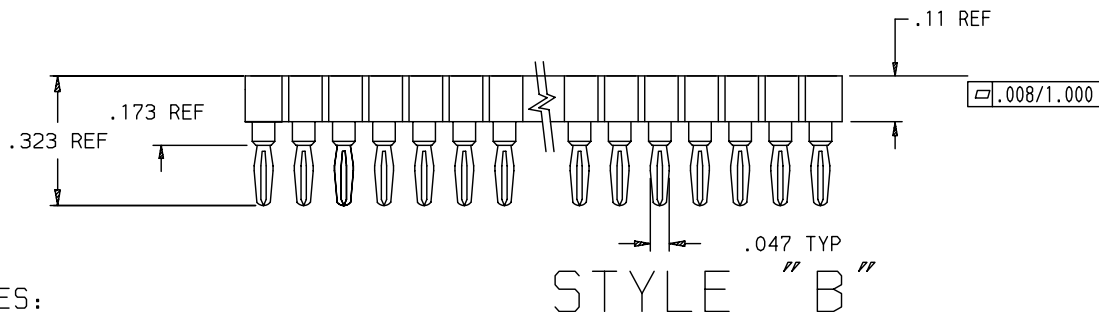

C

NOTES:

- CONTACT MATERIAL:
OUTER SHELL: PHOSPHOR BRONZE.
INNER CONTACT: BERYLLIUM COPPER.
- CONTACT PLATING:
OUTER SHELL: 200u" TIN/LEAD PER SAE AMS-P-81728,
OUTER SHELL: 200u" TIN for LEAD FREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: 200u" TIN/LEAD PER SAE AMS-P-81728,
INNER CONTACT: 200u" TIN for LEAD FREE VERSION
OVER 100u" NICKEL PER QQ-N-290.

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in 65-22-008.
- Packaging spec: see 65-14-920

- NUMBER OF CONTACTS PER ROW (01 TO 18).
- COMPLIANT PRESS FIT IN ϕ .040±.003 PLATED HOLE, RECOMMENDED DRILL SIZE 1.15 MM FOR .090 TO .130 THICK BOARD.
- INSULATOR MATERIAL:
BLACK GLASS FILLED POLYESTER (PCT)

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	inch
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	D-WOLFORD	2000/10/01	ANGULAR	0.X	±0.1
Eng	A-VASBINDER	2000/10/01	LINEAR	0.XX	±0.1
Chr	A-VASBINDER	2000/10/01		0.XXX	±0.1
Appr	A-VASBINDER	2000/10/01	Product family	SOCKET	Spec ref -
FCI		SINGLE ROW SIP		size	A3
		COMPLIANT PRESS FIT		ECN	LS08-0051
catalog no		SEE TABLE		ECN	LS08-0051
				Spec ref	-
				Rev.	L

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/29
J	LS070299	DLW	2007/11/21
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
-	-	-	-
F	LS06-0189	HLE	2006/11/20
G	LS07-0141	HLE	2007/05/21

REV F - 2006-04-17

1 2 3 4

A

B

C

D