

REV. | D

PLOT SCALE: 1=.2

UNLESS OTHERWISE NOTED


DIMENSIONS ARE IN INCHES TOLERANCES ARE:

ONE PLACE DECIMALS $\pm .1[2.5]$ THREE PLACE DECIMALS $\pm .005[.127]$
TWO PLACE DECIMALS $\pm .01[.25]$ FOUR PLACE DECIMALS $\pm .0020[.051]$

ANGLE
+ 2°

TITLE: 2MM SOCKET
STRIP ASSEMBLY

DWG NO:
SQW-1XX-01-X-X-XXX
SHEET 1 OF 1

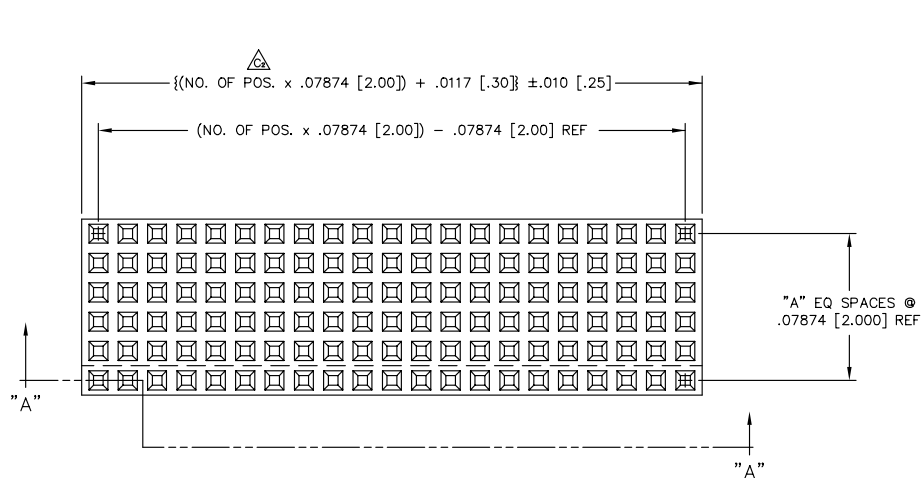

SQW-1XX-01-X-X-XXX

No. OF POSITIONS
SEE TABLE
(PER ROW)

LEAD STYLE
-01

PLATING SPECIFICATION
-F: FLASH SELECTIVE GOLD (USE C-97-01-F)
-L: LIGHT SELECTIVE GOLD (USE C-97-01-L)
-G: GOLD (USE C-97-01-G)
-S: SELECTIVE GOLD (USE C-97-01-S)
-H: HEAVY GOLD (USE C-97-01-H)


POLARIZATION OPTION
-XXX: INDICATES POSITION POLARIZED
(USE PK-07, SEE FIG. 2)

ROW SPECIFICATION
-5: FIVE ROW (USE SQW-XX-5)
-6: SIX ROW (USE SQW-XX-6)

NOTES:

1. CUT FLASH TO BE .015 [.38] MAX.
2. NO CUT FLASH ALLOWED IN THE CONTACT HOLES.
3. CONTACT PUSHOUT FORCE: .5 LB MIN.
4.  REPRESENTS A CRITICAL DIMENSION.

TABLE 1		
ROW	"A"	NO OF POS
-5	4	-02 THRU -50
-6	5	-02 THRU -50

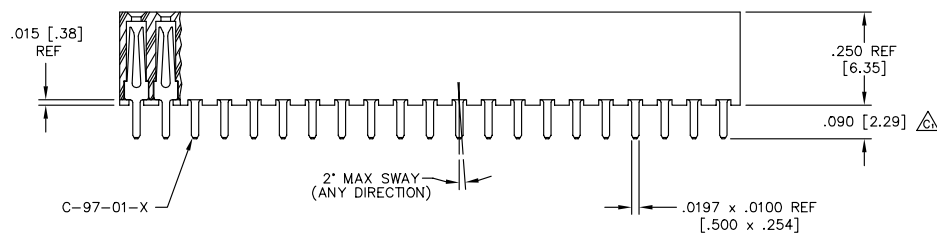

SECT. "A-A"


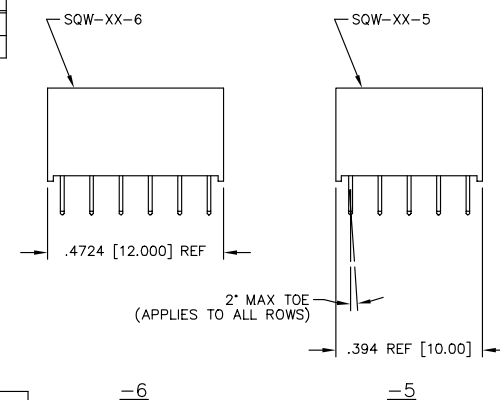


FIG. 1

DO NOT
SCALE FROM
THIS PRINT


PACKAGING VIEW

ROW	NO OF POS	PKG TUBE	TUBE PLUG
-5	-02-50	PT-1-24-01-52	TP-13
-6	-02-50	PT-1-24-01-52	TP-13

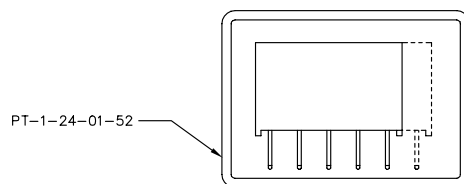

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSFERRED TO
OTHER DOCUMENTS OR DISCLOSED TO
OTHERS OR USED FOR ANY PURPOSE
OTHER THAN THAT FOR WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED
WRITTEN CONSENT OF SAMTEC INC.

FIG. 2
POLARIZATION OPTION LOCATION
INSERT PK-07 INTO SPECIFIED
POSITION AND BREAK OFF TAB

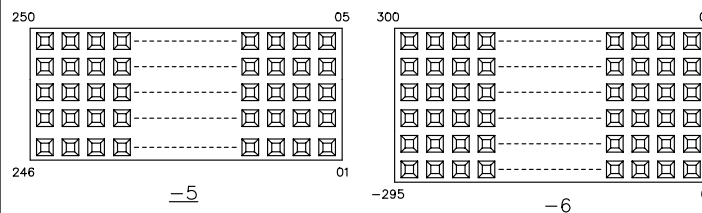

santec

810 PROGRESS BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: BURREN 8-19-97

SQW-1XX-01-X-X-XXX
SHEET 1 OF 1