
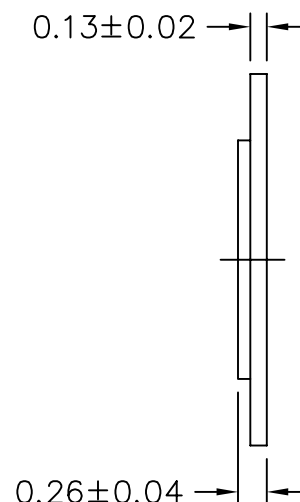


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2003, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RESONANT FREQUENCY	2,600±500	Hz
RESONANT IMPEDANCE (MAX)	250	Ohm
MAX INPUT VOLTAGE	30	Vp-p
CAPACITANCE @ 1KHz	50,000±30%	pF
PLATE MATERIAL	BRASS	—
OPERATING TEMPERATURE	-20 ~ +60	°C
STORAGE TEMPERATURE	-20 ~ +70	°C

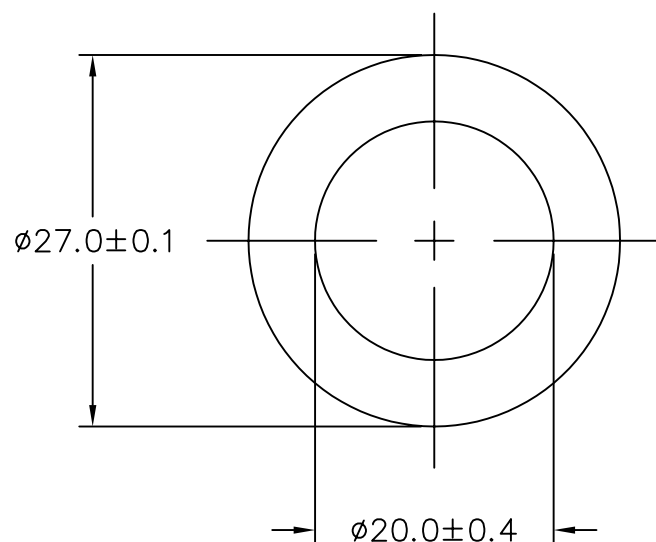

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THE RESONANT RESISTANCE IS SUITABLE ONLY FOR PIEZO ELEMENT WITHOUT WIRE.

FILE NAME
AB2726B.DWG

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	2/11/04	
A	REVISED DIMENSION SIZE AND STYLE	01/24/06	B.R.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3°.

APPROVALS	DATE
DRAWN <i>R.A.C.</i>	2/04
APPROVED <i>R.W.</i>	2/04

DO NOT SCALE DRAWING



**projects®
unlimited**

Dayton , Ohio

PIEZO CERAMIC BENDER
AB2726B

SIZE
A

DRAWING NO.
AB2726B

SCALE: N.T.S.

SHEET 1 OF 1