


- A. 10mm (.395") snap stud to ground work surface.
- B. Molded in black thermoplastic elastomer.
- C. Ring terminal, .200" ID, (#10).
- D. Extra ring terminal included for customizing length.
- E. The 09826 has a 1 megohm resistor between the snap and ground, with banana jacks at ground potential. The 09825 has no resistor between snap and ground, with banana jacks also at ground potential.
- F. Wire is autosplice crimped to secure it inside of the mold.


- G. High flex strand copper, 20 gauge, with PVC insulated jacket  
09825 - green insulation with yellow stripe  
09826 - black insulation  
OD = .100"
- H. Dual banana jacks at ground potential (.162" - .164" ± .002" ID).
- I. Desco and ground symbol molded into the plastic.
- J. Date coded to show month and year of manufacture.



Grounds ESD Work  
Surface and Writ Strap  
to Common Point

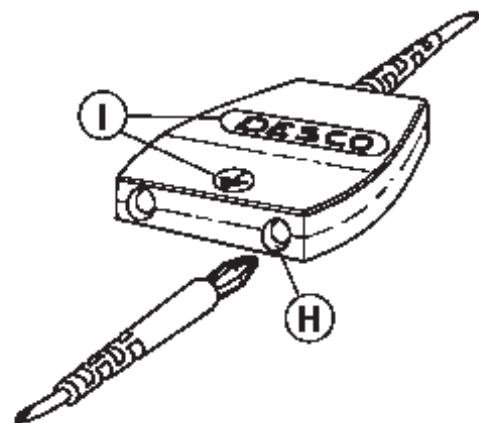

ITEM	DESCRIPTION
09825	No Resistor - Green Wire with Yellow Stripe
09826	One Megohm Resistor to Mat - Black Wire



Made in America

## GROUND CORD, COMMON POINT, WORKMAT

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [www.desco.com](http://www.desco.com)  
PHONE (909) 627-8178 FAX (909) 627-7449 FAX REQUEST (909) 627-7126  
DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER  
09825

DATE:  
January  
2009

# DESCO