
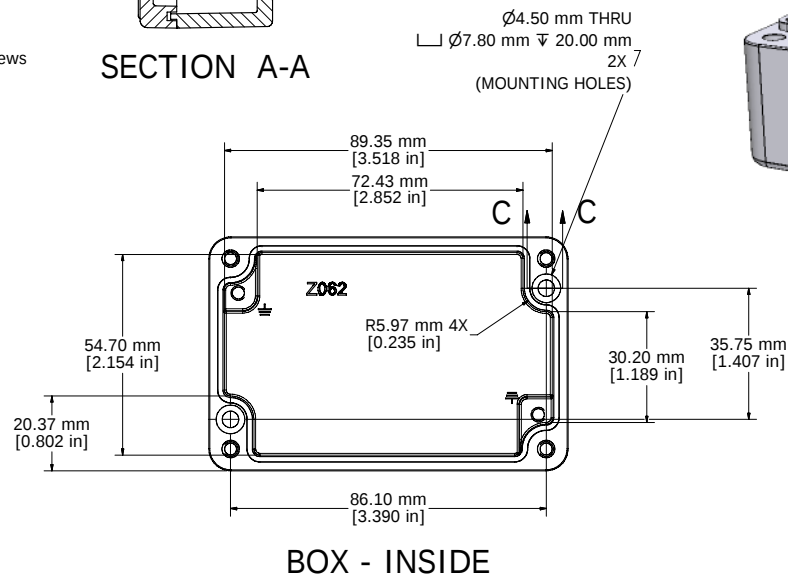
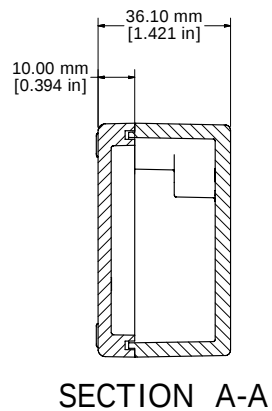
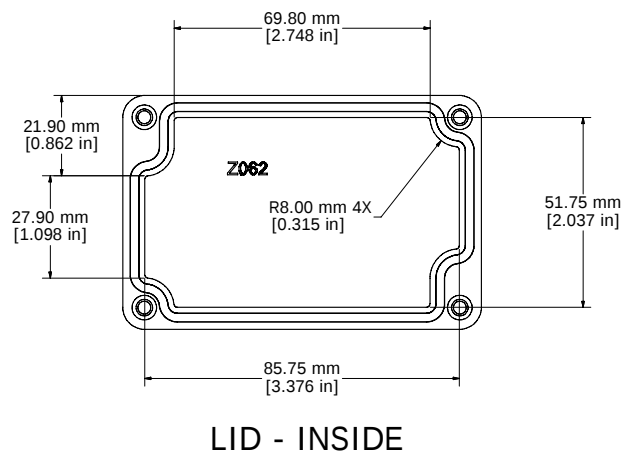
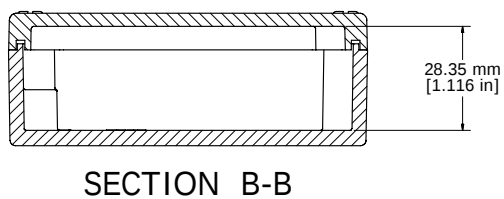
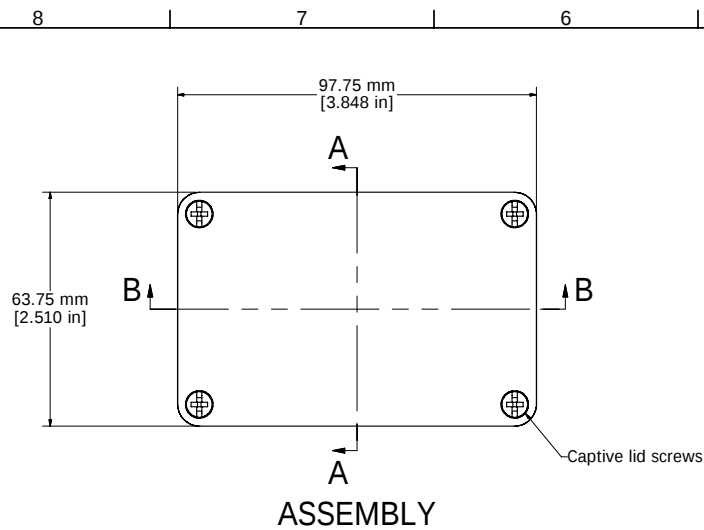


UL US LISTED
File #E65324
NEMA 4, 4X

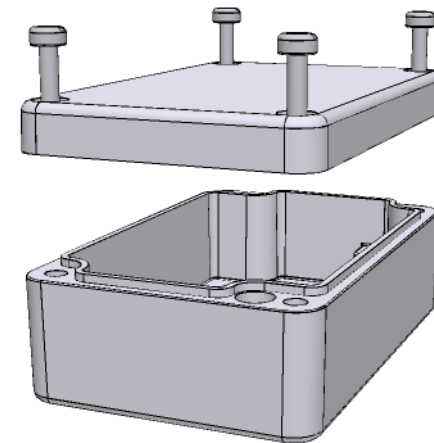

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTES

Purchased assembly includes enclosure, M4x20 lid screws and M4x6 ground screws.
Gasket - Preformed Silicone Rubber
Cover screws should be torqued to 5-7.5 lbf.in (50-75 cN.m)

1590Z062

PART NUMBERS

Basic Enclosure	1590Z062
Black Enclosure	1590Z062BK
Grey Enclosure - RAL7001 Gloss	1590Z062GY



**HAMMOND
MANUFACTURING™**

1590Z062

www.hammondmfg.com