



1752/6458



Basic Part Number	Length K
1752-0	0,51
6458-0	0,89

XXXX-0-00-XX-00-00-03-0
Press-fit in 1,45 mounting hole


3413/8404



Basic Part Number	Length S
3413-0	3,0
8404-0	3,33


X4XX-0-00-XX-00-00-03-0
Press-fit in 1,45 mounting hole

9075




9075-0-00-XX-00-00-03-0
Press-fit in 0,86 mounting hole

9218




9218-0-00-XX-00-00-03-0
Press-fit in 1,45 mounting hole

2617



2617-0-01-XX-00-00-03-0
Compliant press-fit in 1,02 ±0,08 hole. For 1,52 → 2,54 thick board

8995

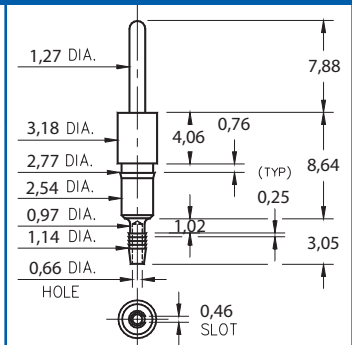

8995-0-01-XX-00-00-03-0
Compliant press-fit in 1,02 ±0,08 hole. For 1,52 → 2,54 thick board

SPECIFICATIONS

PIN MATERIAL:
Brass Alloy 360, 1/2 Hard
(Except where noted)

PART MANUFACTURED IN
INCHES, METRIC FOR REF ONLY

TOLERANCES ON:
LENGTHS: ± 0,13
DIAMETERS: ± 0,05
ANGLES: ± 2°

ORDER CODE: XXXX - X - XX - XX - 00 - 00 - 0X - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 μm TIN/LEAD OVER NICKEL
- 80 5,08 μm TIN OVER NICKEL
- 15 0,25 μm GOLD OVER NICKEL
- 21 0,51 μm GOLD OVER NICKEL
- 34 1,27 μm GOLD OVER NICKEL

