

4




3

2

1



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 1997 .
 (C) COPYRIGHT 1997 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS						
J						REV				
				P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
					0	PROPOSED	FJ00-0887-99	10.FEB'00	K.I	Y.K
					A	REVISED	FJ00-0491-01	13.MAR'01	T.S	S.M
					B	REVISED	FJ00-0791-01	19.MAY'01	T.S	S.M
					B1	REVISED	FJD0-0357-03	31.OCT'03	T.S	S.M
					C	REVISED	FJD0-0171-04	12May'04	T.S	DM

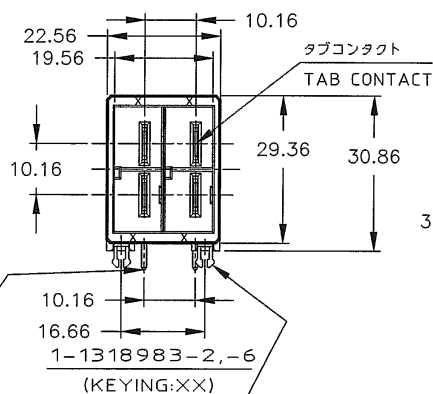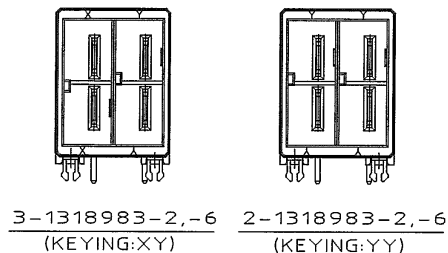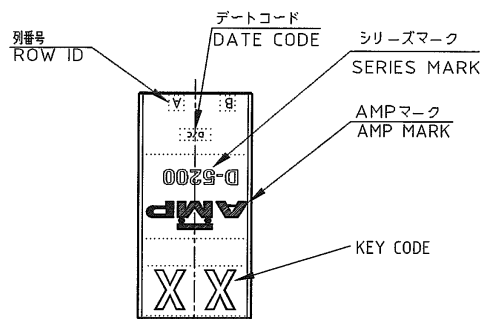


△ CONTACT TAIL

△ RETENTION LEG

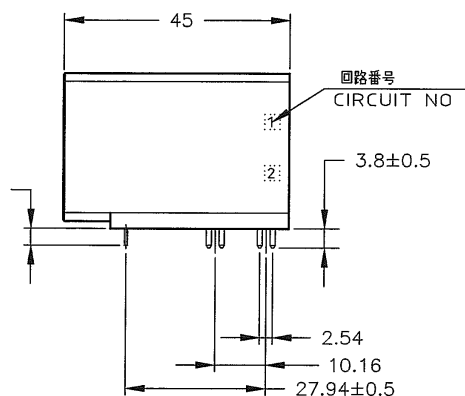

NOTES

- MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC, POLYESTER(94V-0), COLOR: BLACK
 TAB CONTACT: COPPER ALLOY
 RETENTION LEG: BRASS
- △ FINISH (CONTACT AREA): ALL OVER 2.54 μm MIN SILVER PLATING OVER NI PLATING
- △ FINISH (RETENTION LEG): TIN-LEAD PLATED OVER NICKEL. (CONTACT TAIL)
- △ FINISH (CONTACT AREA): 0.38 μm Min GOLD PLATING OVER NICKEL.

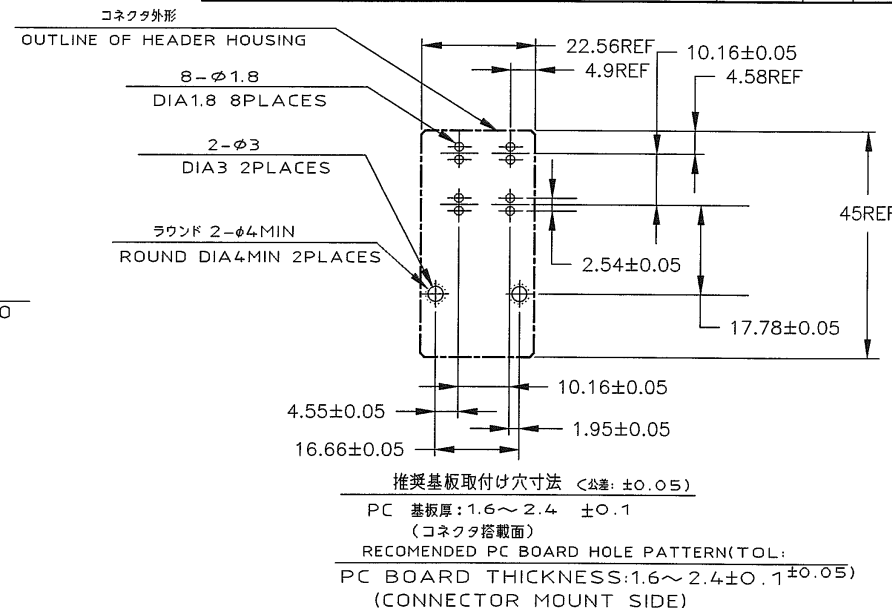

注記

- 材料: ハウジング: ガラス入り熱可塑性ポリエステル樹脂 (94V-0), 色: 黒
 タブ コンタクト: 銅合金
 リテンション レグ: 黄銅
- △ めっき: コンタクト: Ni 下地の上に 2.54 μm MIN 全面銀めっき
- △ めっき: リテンションレグとコンタクト半田付部: ニッケル下地の上にスズめっき
- △ めっき: コンタクト: Ni 下地

XY	△	3-1318983-2
YY	△	2-1318983-2
XX	△	1-1318983-2
XY	△	3-1318983-6
YY	△	2-1318983-6
XX	△	1-1318983-6
KEY TYPE	コンタクトのめっき (FINISH)	製品番号 (PART NO.)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN K.IKEDA 9/FEB/'00
DIMENSIONS: 単位: mm		CHK Y.KATO 10/FEB/'00
TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差 1% : ±0.3 3% : ±0.35 10% : ±0.4 ANGLE : ±3°		APVD I.HASEGAWA 10/FEB/'00
MATERIAL 材料		PRODUCT SPEC 製品規格 108-5453
FINISH 仕上		APPLICATION SPEC 応用規格 114-5206
注記参照 SEE NOTE		WEIGHT

WIRE RANGE 適合電線規格		INSULATION DIA 絶縁外径	
Tyco Electronics		Tyco Electronics AMP K.K. Kawasaki, Japan	
2列 ヘッダーアセンブリー (水平 タイプ) DOUBLE ROW HEADER ASS'Y 4P ("H" TYPE) "DYNAMIC D-5200D"		4P	
SIZE A3	CAGE CODE 00779	DRAWING NO 1318983	REV C