



## 1752/6458



| Basic Part Number | Length K |
|-------------------|----------|
| 1752-0            | .020     |
| 6458-0            | .035     |

**XXXX-0-00-XX-00-00-03-0**  
Press-fit in .057 mounting hole


## 3413/8404



| Basic Part Number | Length S |
|-------------------|----------|
| 3413-0            | .118     |
| 8404-0            | .131     |


**X4XX-0-00-XX-00-00-03-0**  
Press-fit in .057 mounting hole

## 9075




**9075-0-00-XX-00-00-03-0**  
Press-fit in .034 mounting hole

## 9218




**9218-0-00-XX-00-00-03-0**  
Press-fit in .057 mounting hole

## 2617



**2617-0-01-XX-00-00-03-0**  
Compliant press-fit in .040 ±.003 hole. For .060 → .100 thick board

## 8995

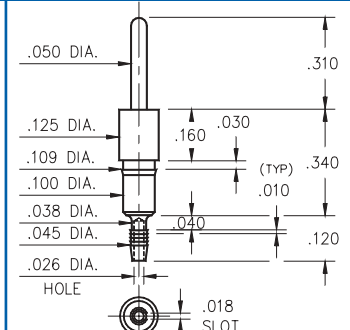

**8995-0-01-XX-00-00-03-0**  
Compliant press-fit in .040 ±.003 hole. For .060 → .100 thick board

### SPECIFICATIONS

**PIN MATERIAL:**  
Brass Alloy 360, 1/2 Hard  
(Except where noted)

**DIMENSION IN INCHES**  
**TOLERANCES ON:**  
LENGTHS: ±.005  
DIAMETERS: ±.002  
ANGLES: ± 2°

**ORDER CODE: XXXX - X - XX - XX - 00 - 00 - 0X - 0**

**BASIC PART #**

**SPECIFY PIN FINISH:**

**01** 200μ" TIN/LEAD OVER NICKEL  
**15** 10μ" GOLD OVER NICKEL  
**21** 20μ" GOLD OVER NICKEL  
**34** 50μ" GOLD OVER NICKEL