

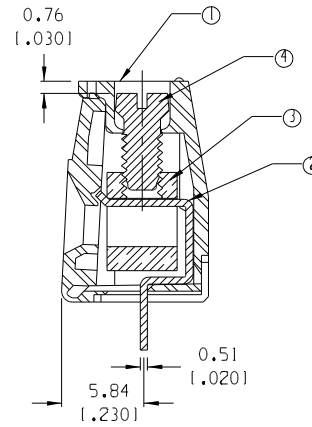
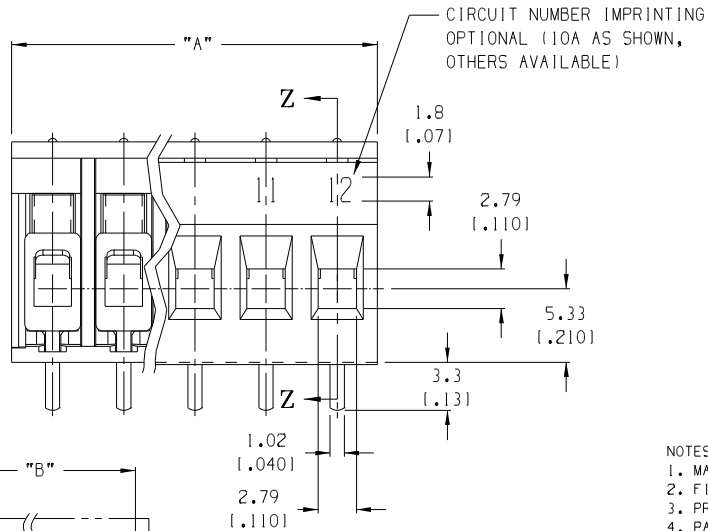
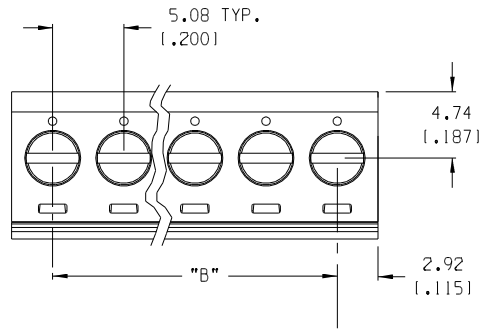


5 CIRCUIT SHOWN

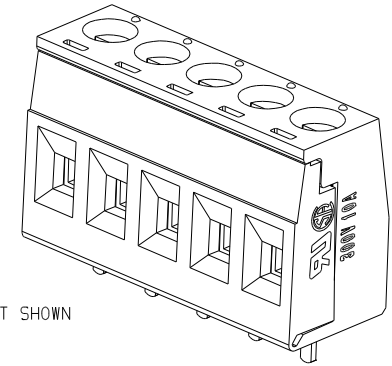

NUMBER OF CIRCUITS "XX"	DIM. "A"	DIM. "B"	MATERIAL NO. STD PACKAGING	MATERIAL NO. SPECIAL PACKAGING
02	10.9 (1.43)	5.08 (1.200)	39880-0102	
03	16.0 (1.63)	10.16 (1.400)	39880-0103	39889-0014
04	21.1 (1.83)	15.24 (1.600)	39880-0104	
05	26.2 (1.03)	20.32 (1.800)	39880-0105	
06	31.2 (1.23)	25.40 (1.000)	39880-0106	39889-0015
07	36.3 (1.43)	30.48 (1.200)	39880-0107	39889-0016
08	41.4 (1.63)	35.56 (1.400)	39880-0108	
09	46.5 (1.83)	40.64 (1.600)	39880-0109	
10	51.6 (2.03)	45.72 (1.800)	39880-0110	
11	56.6 (2.23)	50.80 (2.000)	39880-0111	
12	61.7 (2.43)	55.88 (2.200)	39880-0112	39889-0017
13	66.8 (2.63)	60.96 (2.400)	39880-0113	
14	71.9 (2.83)	66.04 (2.600)	39880-0114	39889-0018
15	77.0 (3.03)	71.12 (2.800)	39880-0115	
16	82.0 (3.23)	76.20 (3.000)	39880-0116	
17	87.1 (3.43)	81.28 (3.200)	39880-0117	
18	92.2 (3.63)	86.36 (3.400)	39880-0118	39889-0019
19	97.3 (3.83)	91.44 (3.600)	39880-0119	
20	102.4 (4.03)	96.52 (3.800)	39880-0120	
21	107.4 (4.23)	101.60 (4.000)	39880-0121	
22	112.5 (4.43)	106.68 (4.200)	39880-0122	
23	117.6 (4.63)	111.76 (4.400)	39880-0123	
24	122.7 (4.83)	116.84 (4.600)	39880-0124	

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. PRODUCT SPECIFICATION: NOT REQUIRED
 4. PACKAGING: SEE TABLE
 5. MATES WITH: NONE
 6. "XX" REFERS TO NUMBER OF CIRCUITS

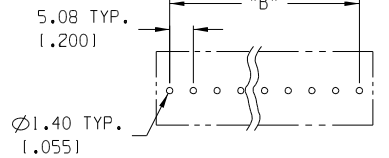

RECOMMENDED PTH PATTERN
SCALE 1:1

4	XX	SCREW, M3 X 0.5, SLOTTED	STEEL	ZN, CLEAR CHROMATE
3	XX	CAGE CLAMP	BRASS	NICKEL
2	XX	TERMINAL, PC	PHOS. BRONZE	HOT TIN DIP
1	I	INSULATOR, SINGLE ROW	THERMOPLASTIC	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

EC NO. ECN# 3963 DRWN: CH-K1 APPR: C	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 3:1	DESIGN UNITS ☐ mm ☒ INCH	 THIRD ANGLE PROJECTION	☒ mm INCH ☐ INCH mm ☐ mm ONLY	REVISE ON CAD ONLY		
		MAJOR	mm	INCH	DRAWN BY & DATE R. KEMP 4-8-02	TITLE: 5.08mm (.200") SR BTS, CS ASSY, FIXED	MOLEX INCORPORATED				
		CRITICAL	4 PLACES		±.0015					CHECKED BY & DATE P. WALTZ 4-8-02	
			3 PLACES	±.038	±.005					APPROVED BY & DATE L. ROTHBAUS 4-8-02	
			2 PLACES	±.13	±.01					CAD FILENAME 8805XX	MATERIAL NO. SEE CHART
		SPC	1 PLACE	±.3	±.1	ANGULAR: ±2°					
C	REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				SIZE B