

13 12

11

10

9

8

7

6

41422

4

3

2

1



ITEM NO. ENG. NO.

41422-5001



41422-5001

NOTES:


1. MATERIAL: BRASS, ALLOY *C26000, TEMPER SPRING, .016/(.04) THICK
2. FINISH: ES-88-P901, HOT TIN DIP .00002/(.0005) MIN.
3. PRODUCT SPECIFICATION: NONE
4. IN ANY HOUSING DESIGN USING THIS TERMINAL, ESPECIALLY WHEN LOW INSERTION FORCES ARE EXPECTED, SOME SORT OF LOCKING DEVICE SHOULD BE CONSIDERED.
5. MATES TO .250/(6.35) X .032/(.81) NOMINAL MALE TAB TERMINAL.
6. CRIMP TO #14 THROUGH #18 AWG. WIRE WITH .031/(.79) THK. INSULATION.

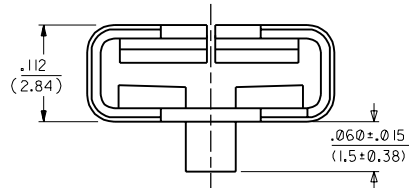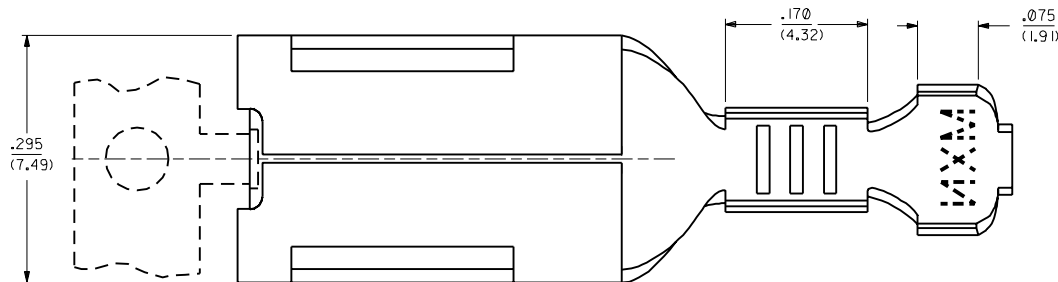

CRIMP SECTION NOT SHOWN
IN THIS VIEW FOR CLARITY.

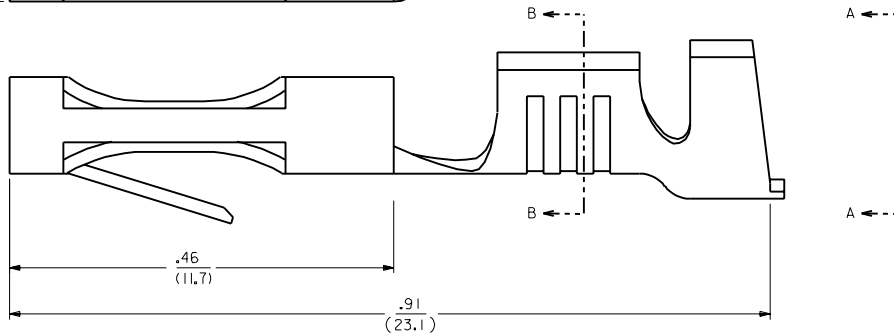

SECTION B-B



VIEW A-A

C	ADD TAB HEIGHT DIM. UCR2000-0114 DSTAMBAU 08/13/99
B	ADD TAB COIN UCR1999-0220 WANG 98-10-02
A	REMOVE "X" PER ECN* U50091 94/08/19 MAB

MFG. SH. REV. LTR. REVISIONS

DIMENSIONS SHOWN (METRIC) INCH		▽ = 2 ▼ = 1		REVISE ONLY ON CAD SYSTEM	
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± .005°		TITLE			
INCH METRIC		TERMINAL, PUSH-ON, CRIMP			
3 PLACE ± .006	---	PART NO. SEE CHART			
2 PLACE ± .01 ± 0.15	---	MOLEX INCORPORATED			
1 PLACE --- ± 0.3	---	LITSEJLL. 60932 U.S.A. SHEET NO. 1 OF 1 DATE 94/08/19			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRWG. NO. SD-41422-5***			
DRWG. BY MAB	CHKD. BY KBP	FILE NAME SD41422X7		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	
APP'D. BY RAS	SCALE 10:1	DOCN		REV. CP	SIZE C

13

12

11

10

9

8

7

6

5

4

3

2

NO P.S.I