


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 19 49
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.



LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
AA	20	P	0	0	RLSD NPI C88-49	4-27-88	69

TERMINAL
64 REQUIRED
BROWN COLOR
DOT LOCATED
IN CENTER

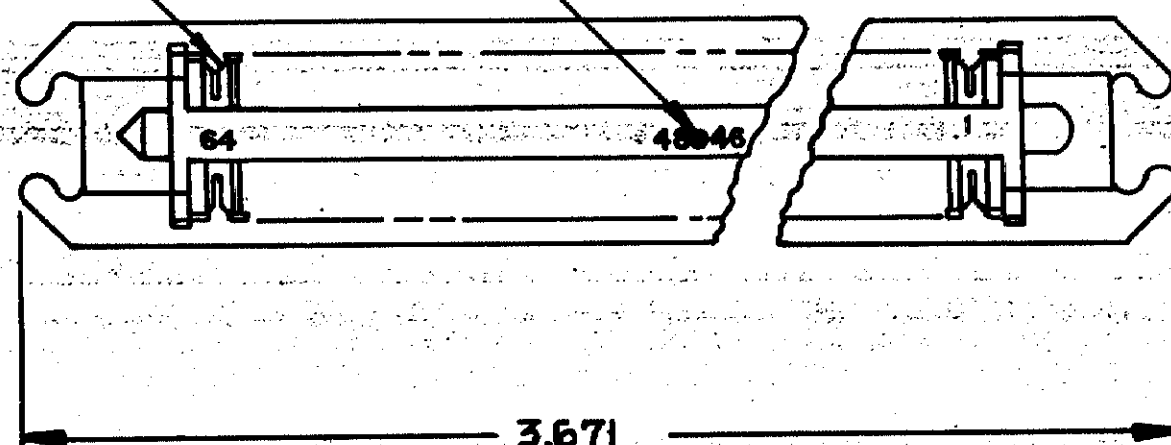

1. THE CONTACT SURFACES OF TERMINALS ARE COATED WITH LUBRICANT.
2. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
3. MATERIAL: HOUSING - POLYPHENYLENE OXIDE, BLACK. TERMINALS - D10 THICK PHOS BRONZE PLATED WITH .0000275 MINIMUM GOLD IN LOCALIZED GOLD PLATE AREA OVER .000050 MINIMUM THICK NICKEL UNDERPLATE.
4. WIRE SIZE: 22 AWG SOLID OR STRANDED COPPER CONDUCTORS. INSULATION DIAMETER OF .045-.056 IS ACCEPTABLE FOR MOST APPLICATIONS.

5. SEE PRODUCT SPECIFICATION 108-6005 FOR PERFORMANCE SPECIFICATION.
6. 100 ASSEMBLIES BULK PACKED IN ANTISTATIC MATERIAL.

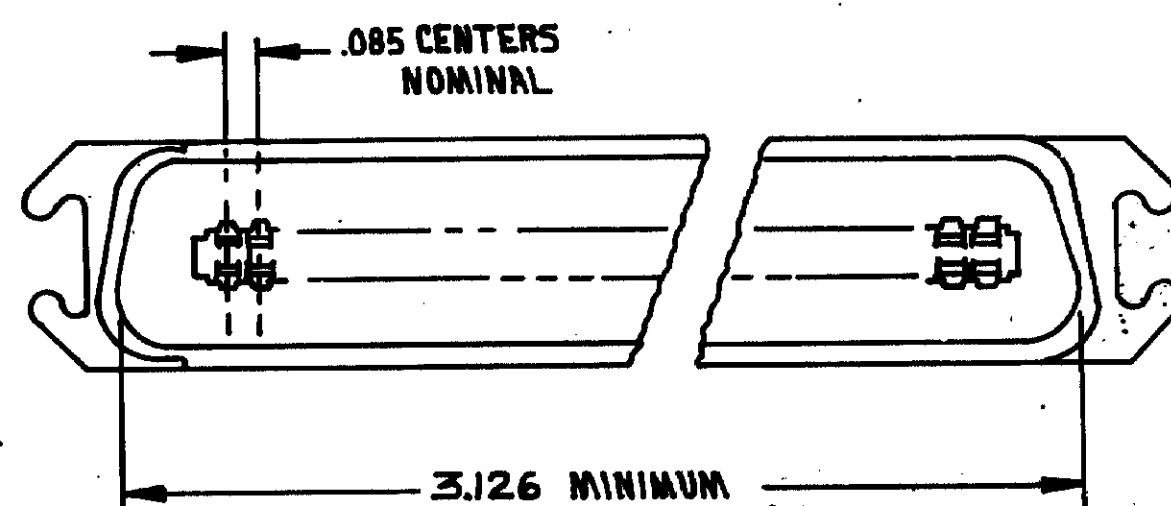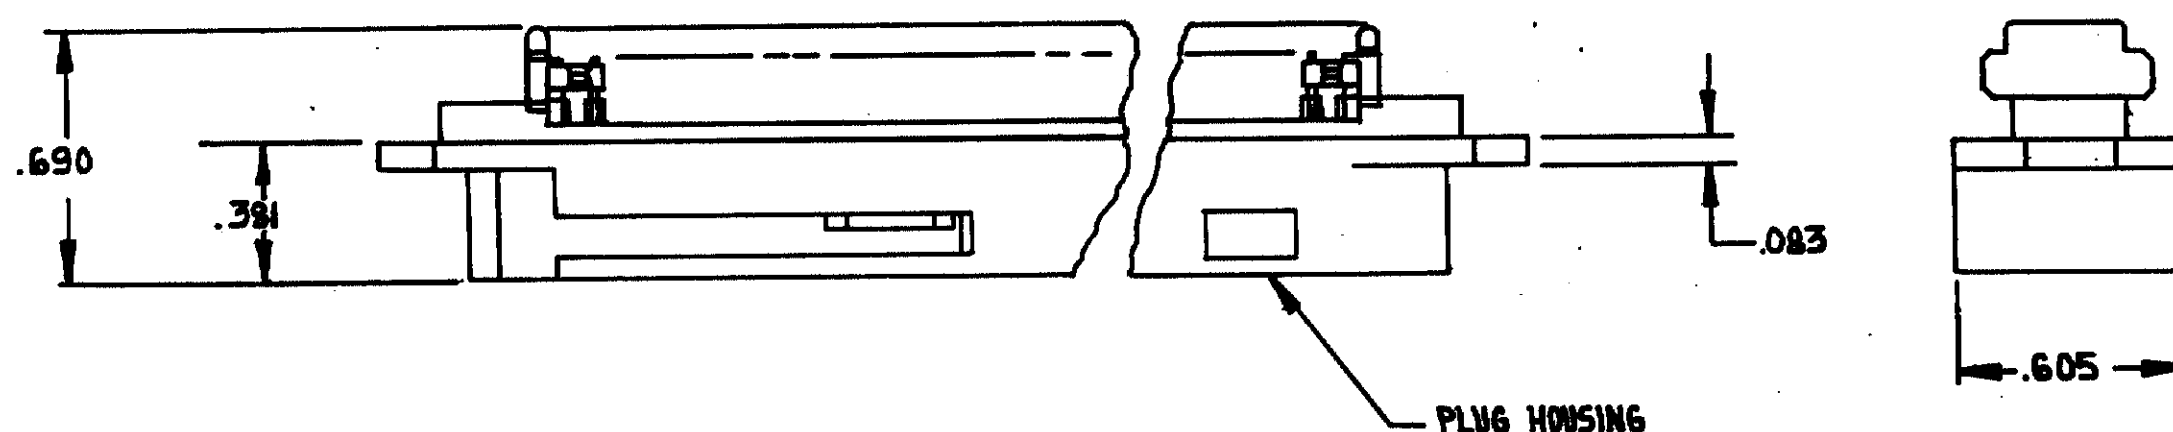

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES OF		DR <i>Glenda Hoodwill</i> 4-27-88		AMP		AMP INCORPORATED Harrisburg, Pa. 17105	
2 PL DEC ±	—	CHK <i>R.L. Clark</i> 5-13-88	NAME PLUG ASSEMBLY, 64 POSITION, F SLOT, BAIL LOCK, CHAMP-LOK®				
3 PL DEC ±	—	APPD <i>E. Marsh</i> 5-16-88					
ANGLES ±	—	APPD <i>H. Squire</i> 5-16-88					
MATERIAL	3	PRODUCT/SPEC	5	DRAWING NO 555753			
FINISH	3	APPLICATION SPEC	SIZE C		FSCM NO 00779	SHEET 1 OF 1	
WEIGHT		SCALE 2:1		CUSTOMER DRAWING			