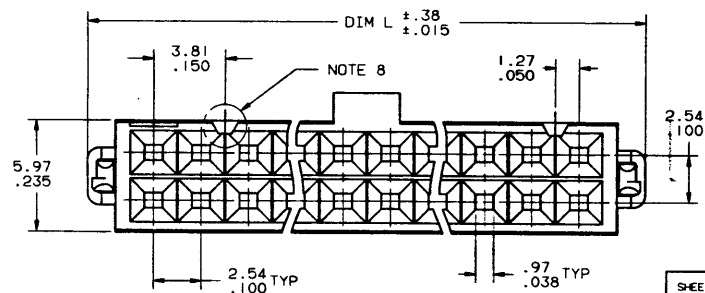
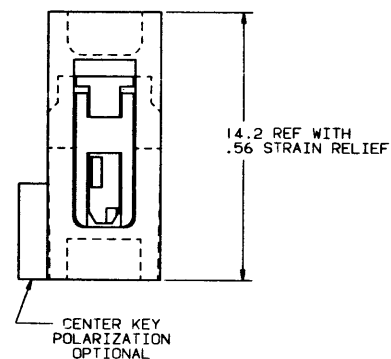


REVISIONS			
REV	DESCRIPTION	BY	DATE
D	REDRAWN WITHOUT LOGO	RLS	8/6/8

[illegible]

NOTE: This print is the property of and embodies proprietary designs of DUPONT CONNECTOR SYSTEMS, Division of E. I. du Pont de Nemours & Co., Inc. No part of the design shown on this print may be used in any way without the written consent of DUPONT CONNECTOR SYSTEMS, Corp. Mill, Pa.

31

•



RIGHT ASSY



LEFT ASSY



DUAL ENTRY

NOTES:

1. TERMINAL MATERIAL: FILL HARD PHOS. BRONZE ALLOY, UNS-C51000.
2. TERMINAL PLATING: $1.27\mu/50\mu$ " MIN NI UNDERPLATE OVER ENTIRE TERMINAL AND $1.27\mu/50\mu$ " MIN AU IN DISCONNECT AREA ONLY.
3. MOLDING MATERIAL: BASE & COVER- GLASS FILLED POLYESTER, FLAME RETARDANT PER UL94V-0, COLOR- BLUE.
4. CONNECTOR ASSEMBLIES PACKAGED IN TUBES.
5. THE FIRST TWO CAVITY POSITIONS AND THE LAST TWO, ARE IDENTIFIED BY NUMBER.
6. POLARIZING FEATURES ARE DESCRIBED IN TABLE.
7. MOLDING MATERIAL: STRAIN RELIEF- POLYSULFONE, FLAME RETARDANT PER UL94V-0, COLOR- NATURAL.
- ⑧ THE POLARIZING FEATURE ON THIS END IS NON-EXISTANT ON 2×5 AND 2×7 POSITION CONNECTORS.
9. 2×5 POSITION NOT AVAILABLE WITH POLARIZATION SLOT ON CENTER KEY STYLE.

SHEET	ISSUE
INDEX	

NOTE: This print is the property of and embodies proprietary designs of DUPONT CONNECTOR SYSTEMS, Division of E. I. du Pont de Nemours & CO., Inc. No part of the design shown on this print may be used in any way without the written consent of DUPONT CONNECTOR SYSTEMS, Code Hill, PA.