

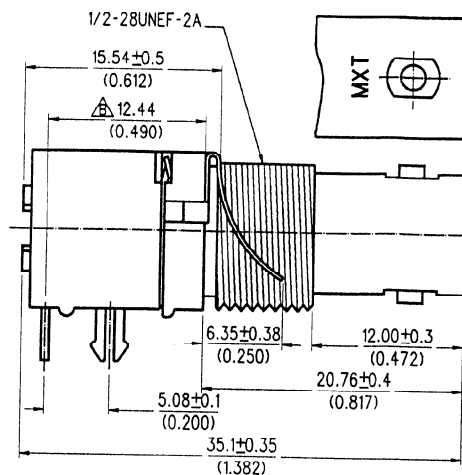


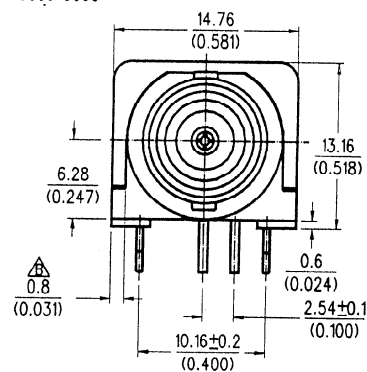
ENG. NO SDA-73100-0223

EDP NO

SIMILAR ITEM 73100-0090

CAD FILE NO. S1000223.DGN

DO NOT SCALE DRAWING

INTERFACE PER
MOLEX STANDARD
ES-73599-0000

RECOMMENDED MOUNTING HOLE
RECOMMENDED MOUNTING
TORQUE : 5.0 IN-LBS MAX.
PANEL THICKNESS : 5.5 mm MAX.

CONSTRUCTION:

- BODY-----ZINC ALLOY
HOUSING-----VALOX 420-SEO BLACK
CENTER CONTACT---PHOSPHOR BRONZE
DIELECTRIC-----POLYPROPYLENE (94 V-2)
SOLDER TAIL-----COPPER OVER STEEL WIRE
FRONT CLIP-----PHOSPHOR BRONZE
CHIP CAPACITOR-----MULTILAYER CERAMIC
BOARD LOCK CLIP---PHOSPHOR BRONZE
(C52100, GRADE H10)
LOCK WASHER-----PHOSPHOR BRONZE
NUT-----BRASS

FINISH:

- BODY-----NICKEL PLATING
CENTER CONTACT---GOLD PLATING (10u")
SOLDER TAIL-----TIN PLATING
FRONT CLIP-----NICKEL PLATING
BOARD LOCK CLIP---TIN PLATING
LOCK WASHER-----NICKEL PLATING
NUT-----NICKEL PLATING

MECHANICAL & ELECTRICAL CHARACTERISTICS:

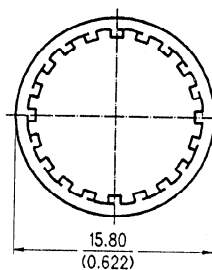
- PER PRODUCT SPECIFICATION PS-73598-0010

MATERIAL & FINISHES:


- PER PRODUCT SPECIFICATION PS-73598-0010

PACKAGING:


TRAY PACKAGING




LOCK WASHER

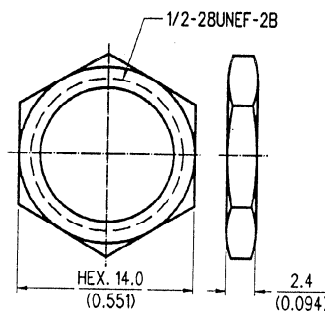

JAM NUT

9400 ±20% PF, 1.5 KV W V_{dc}

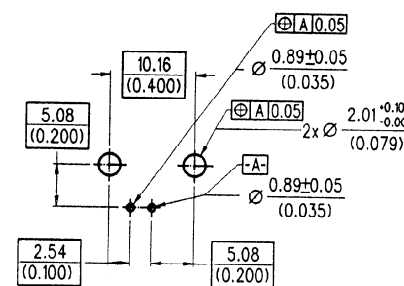SCHEMATIC



PCB HOLE CONFIGURATION

				MATERIAL : SEE NOTES		 MOLEX TAIWAN LTD. (R.F. DIVISION)	
				FINISH : SEE NOTES			
				SCALE : 2.5:1		UNIT : mm(INCH)	
				DRAWN BY : IRIS WANG		GENERAL TOLERANCES ANGLE : ± 3° DIM. ± 0.25 (± 0.1)	
				CHK'D BY : Iris Wang		DRW. NO. : SDA-73100-0223	
				APPR'D BY : Iris Wang		REV : B	
LTR REVISION RECORD				ECN DR DATE		TITLE : 50 OHM FILTER BNC R/A PCB RECEPTACLE	
STANDARD ITEM				☐ YES ☒ NO			
				SHEET 1 OF 1			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX TAIWAN AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

MXT, So - 13

BNC-J/PCB/RABK/FI