
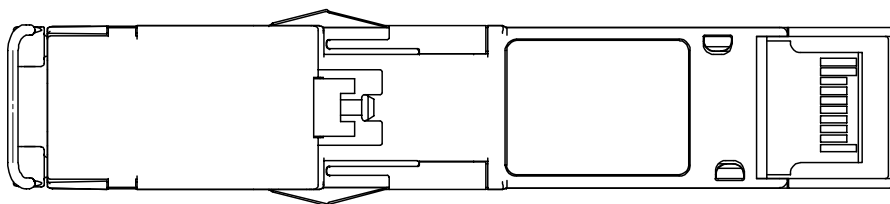
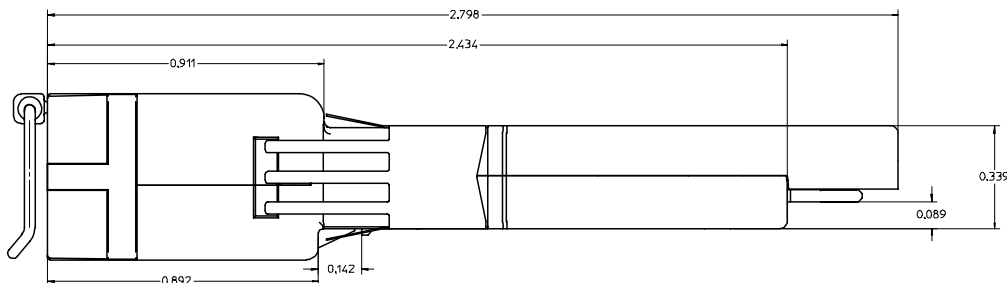

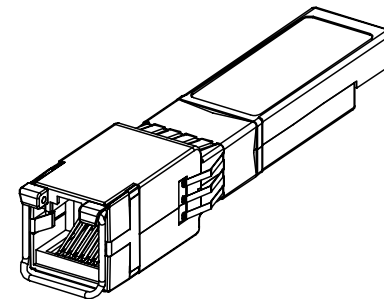


20 19 18 17 16 15 14 13 12 11 74741 9 8 7 6 5 4 3 2 1

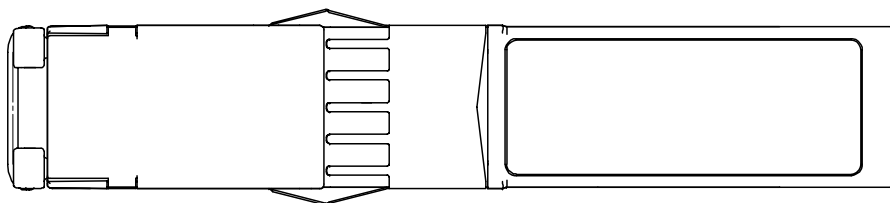

FEATURES:

1. MEETS IEEE 802.3z, u, ab.
2. MEETS 1000BASE-T STANDARDS.
3. MATES WITH STANDARD SFP MSA SPECIFICATION COMPONENTS.
4. MATES WITH COMMON 1X4 AND OTHER GANGED SFP CAGES.
5. HOT PLUGGABLE.
6. REQUIRES <1 WATT OF POWER.
7. SERIAL ID.
8. SOFTWARE CONFIGURABLE.
9. 100 METER CAT-5 AT <10⁻⁹ BER.
10. CENTERED RJ-45 MOD JACK, CONFORMS TO 1U RACK.
11. .567 INCH SPACE REQUIRED BETWEEN ADJACENT CAGE ON TOP OR BOTTOM.
12. ROBUST ZINC ALLOY DIE CAST BODY, NICKEL PLATED.
13. EMI GROUNDING GIRDLE PROVIDES 13 CONTACT POINTS AROUND CAGE OPENING.
14. BAIL DE-LATCH SYSTEM, USES LIFT AND PULL ACTION TO REMOVE.
15. LEAD FREE, RoHS COMPLIANT.

PART NUMBER	DESCRIPTION
747410021	1000BASE-T SFP RJ-45 CENTERED, LOS GND
747410022	1000BASE-T SFP RJ-45 CENTERED, LOS TOGGLE

EC NO: USY2007-0042 DRWN:CCOX 2006/07/28 CHKD: 2006/08/07 APPR:BRUSSELL2006/08/15 REV A	QUALITY SYMBOLS ▽.0 ▽.0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ±.0005 3 PLACES ±.0008 2 PLACES ±.0012 1 PLACE ±.0015 ANGULAR ± 2 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 5:1 DESIGN UNITS INCH DIMENSION STYLE INCH ONLY DRAWN BY KLLLOYD DATE 2003/07/29 CHECKED BY BRUSSELL DATE 2003/07/29 APPROVED BY BRUSSELL DATE 2003/07/29	THIRD ANGLE PROJECTION REVISE ON CAD ONLY TITLE 1000 BASE-T SFP ADAPTER SALES DRAWING MOLLEX MOLEX INCORPORATED MATERIAL NO. SEE CHART DOCUMENT NO. SD-74741-021 SHEET NO. 1 OF 1

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1