

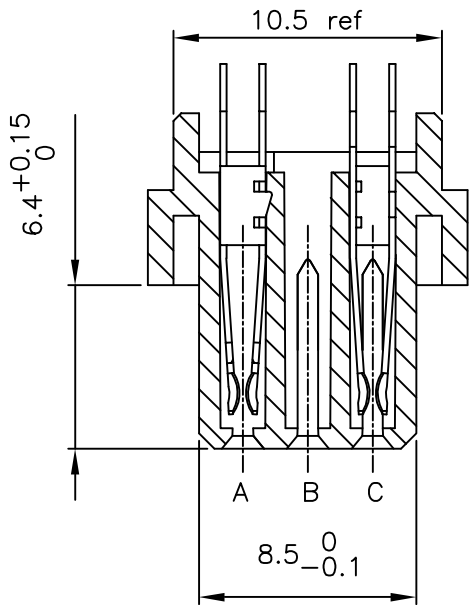
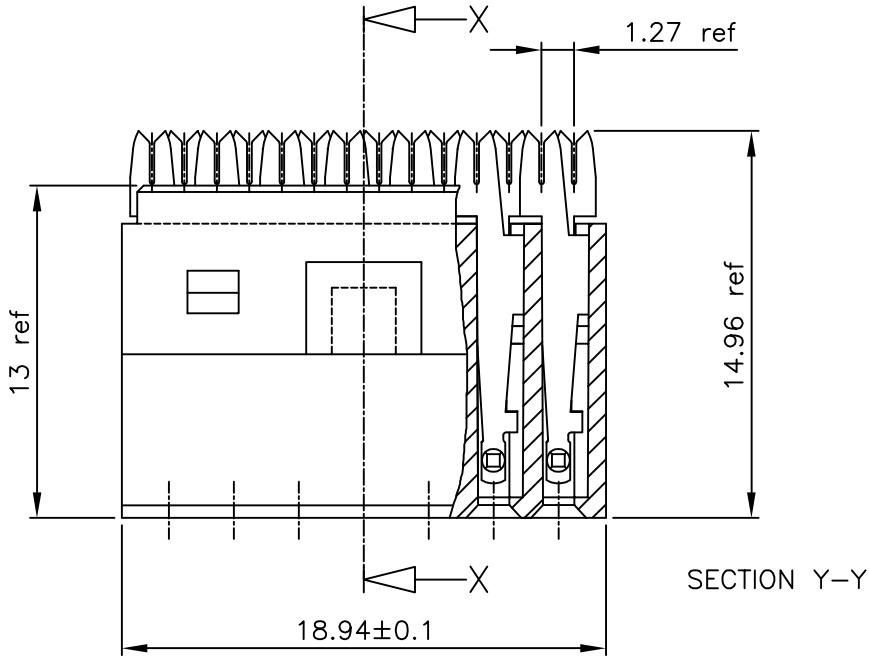


PRODUCT NUMBER	Number of Terminals	AWG	ROW	X=pos terminal						
				1	2	3	4	5	6	7
75948-X01	2 x 7	28 Str. / 30 Sol.	c	X	X	X	X	X	X	X
			b							
			a	X	X	X	X	X	X	X
75948-X02	2 x 7	28 Str. / 30 Sol.	c							
			b	X	X	X	X	X	X	X
			a	X	X	X	X	X	X	X

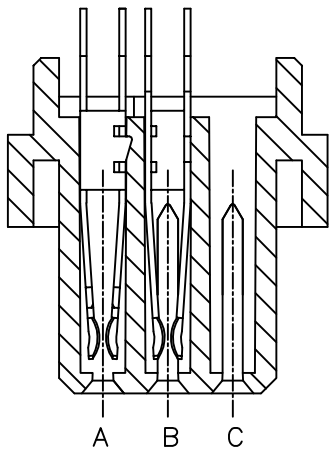

SECTION X-X
ACCORDING TO 75948-X01

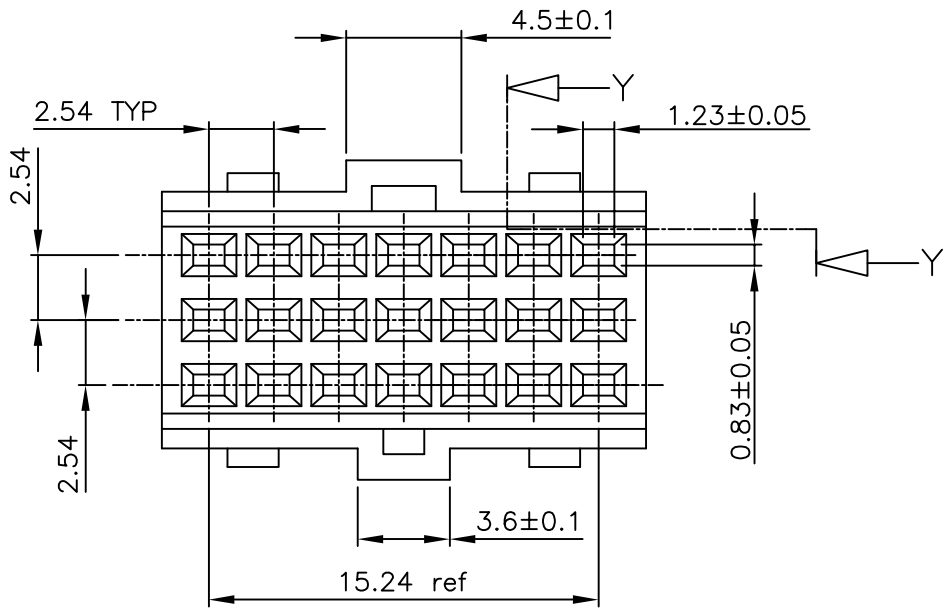

SECTION X-X
ACCORDING TO 75948-X02

NOTE:-

1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

2. LEAD FREE OR RoHS DIRECTIVE LABELLING TO BE PROVIDED AS PER GS-14-920 FOR LEAD FREE VERSION.

75948-4YY	2.0 um Au min over 3.0 um Ni	0.1-0.2 um Ni
75948-2YY	0.5 um Au min over 3.0 um Ni	0.1-0.2 um Ni
75948-1YY	1.0 um Au min over 3.0 um Ni	0.1-0.2 um Ni
75948-0YY	3.0 um Au min over 3.0 um Ni	0.1-0.2 um Ni
PRODUCT CODE YZ	PLATING CONTACT AREA	PLATING PIERCING AREA

NOTES:

1.MATERIAL HOUSING: POLYESTER 30% GLASS FILLED COLOUR GREY, FLAME RETARDANT PER UL-94-V0

2.MATERIAL CONTACT: PHOSPHOR BRONZE

3.FOR CABLE APPLICATION SEE TA 310

4."LF" SUFFIX TO THE PRODUCT NUMBER FOR LEAD FREE OR RoHS COMPATIBLE PRODUCTS.

mat'l. code see notes				surface	tolerance	projection	product family	
ltr	ecn no	dr	date	ISO 1302	ISO 406	ISO 101	title	
E	H00085	MVI	1990-02-23	angles	linear	mm	CableConnector	
F	H20166	MVI	1992-03-31				assembly 2x7 pos.	
G	105-0138	MINI	2005-08-08			scale	dwg no	
H	106-0082	MINI	2006-06-01	dr	M. Visschers	1992-03-20	sheet 1 of 1 size	
				enrg			75948	
				chr	RAKHEE GEORGE	2006-06-01	A2	
				appd	RAKHEE GEORGE	2006-06-01	type	
sheet index	revision sheet	H	1				CUSTOMER Drawing	