



1305

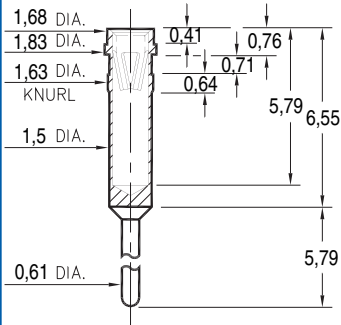


1305-0-15-XX-47-XX-04-0
Press-fit in 1,55 mounting hole

1306

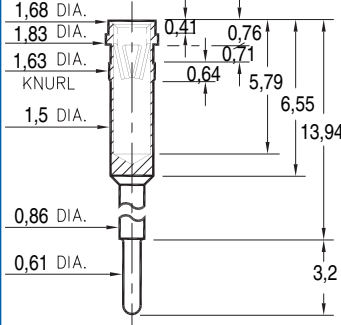


1306-0-15-XX-47-XX-04-0
Press-fit in 1,55 mounting hole.

7305

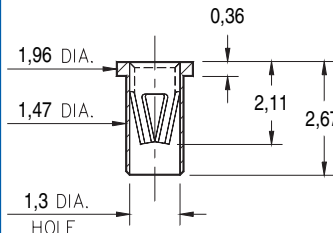


7305-0-15-XX-47-XX-10-0
Solder mount in 1,52 min. mounting hole
Also available on 24mm wide carrier tape: 1,500 parts per 330mm reel.
Order as: 7305-0-57-XX-47-XX-10-0

0400

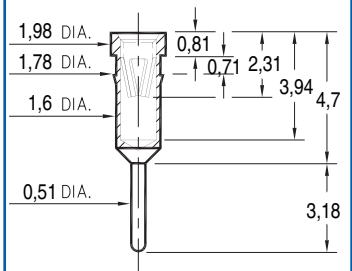


0400-0-15-XX-47-XX-04-0
Press-fit in 1,7 mounting hole.

0335

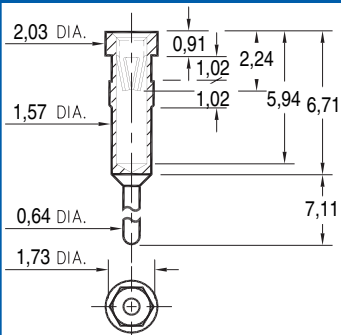


0335-0-15-XX-47-XX-04-0
Hex press-fit in 1,63 plated thru hole

4614




4614-0-31-XX-47-XX-04-0
Compliant press-fit in 1,02±0,08 plated hole. For 1,52" 2,54 thick board.

4615

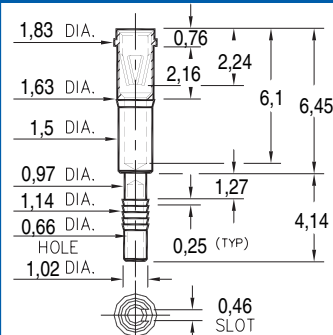


4615-0-31-XX-47-XX-04-0
Compliant press-fit in 1,02±0,08 plated hole. For 2,29" 3,30 thick board.

7614

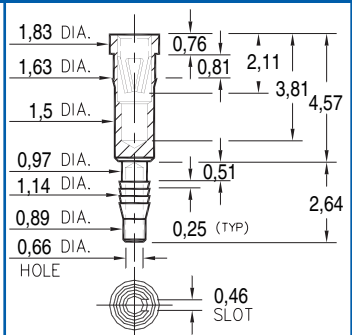


7614-0-31-XX-47-XX-04-0
Compliant press-fit in 1,02±0,08 plated hole. For 1,52" 2,54 thick board.

8401

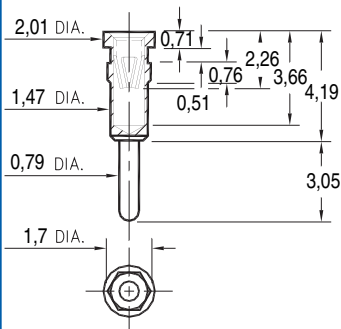


8401-0-15-XX-47-XX-04-0
Hex press-fit in 1,6 plated thru hole

2400




2400-0-15-XX-47-XX-04-0
Press-fit in 1,68 mounting hole.

6857

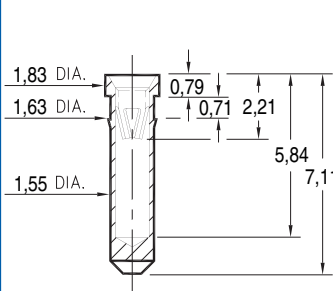

6857-0-15-XX-47-XX-10-0
Press-fit in 1,55 mounting hole.

9393

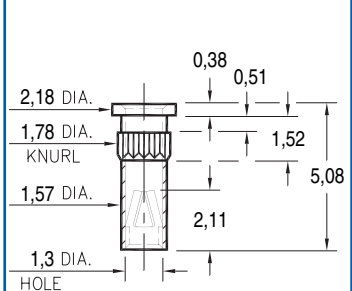

9393-0-15-XX-47-XX-10-0
Press-fit in 1,70 mounting hole.

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

PART MANUFACTURED IN INCHES, METRIC FOR REF ONLY

TOLERANCES ON:
LENGTHS: ± 0,13
DIAMETERS: ± 0,05
ANGLES: ± 2°

ORDER CODE: XXXX - X - 15 - XX - 47 - XX - XX - 0

BASIC PART #

SPECIFY SHELL FINISH:

01 5,08µm TIN/LEAD OVER NICKEL

80 5,08µm TIN OVER NICKEL

15 0,25µm GOLD OVER NICKEL



SPECIFY CONTACT FINISH:

01 5,08µm TIN/LEAD OVER NICKEL

80 5,08µm TIN OVER NICKEL

27 0,76µm GOLD OVER NICKEL

CONTACT

#47 CONTACT (DATA ON PAGE 211)