




TECHNICAL SPECIFICATIONS:

I- MATERIAL: HOUSING: POLYESTER G.F. UL94V0
 COLOR : BLACK
 TERMINAL : PHOSPHOR BRONZE PLATED WITH
 0.00127-0.00152/.000050-.000060 GOLD
 IN CONTACT AREA , 0.00190/.000075 MIN
 PURE TIN IN TAIL AREA BOTH OVER
 0.00127/.000050 MIN NICKEL OVERALL
 SHIELD : BRASS PLATED WITH 0.0020/.000078
 MIN TIN

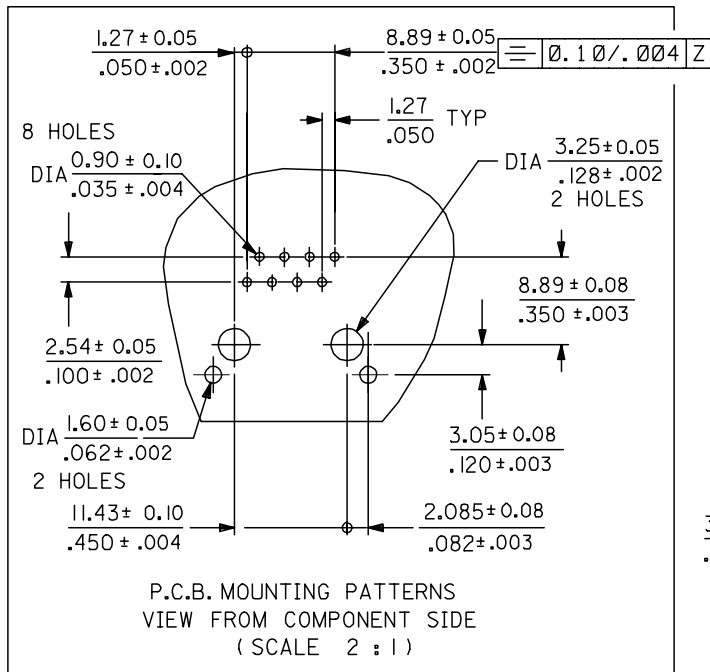


NOTES :

- 1- JACK FOR MATING WITH F.C.C. 68 PLUGS 95043 MOLEX SERIES.
- 2- PRODUCT SPECIFICATION: MOLEX PS-85505.
- 3- APPLICATION SPECIFICATION: MOLEX AS-95001.
- 4- PACKAGING SPECIFICATION: MOLEX PK-95123.
- 5- P.C. BOARD THICKNESS (SEE CHART) DIM A
- 6- EXCEEDS CATEGORY 5E PERFORMANCE.

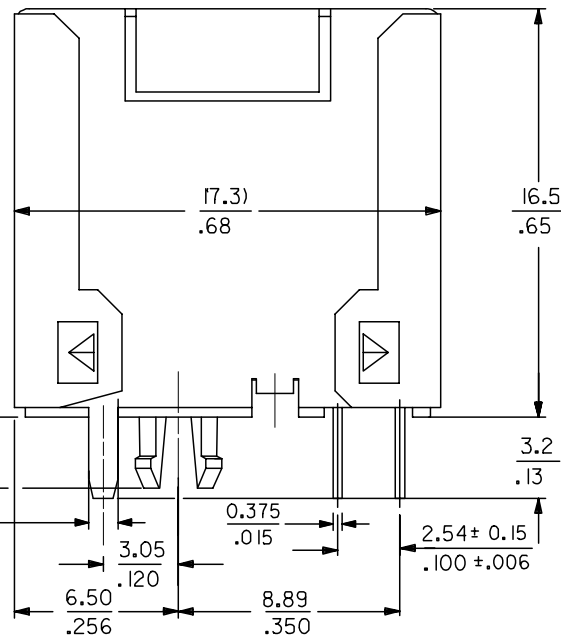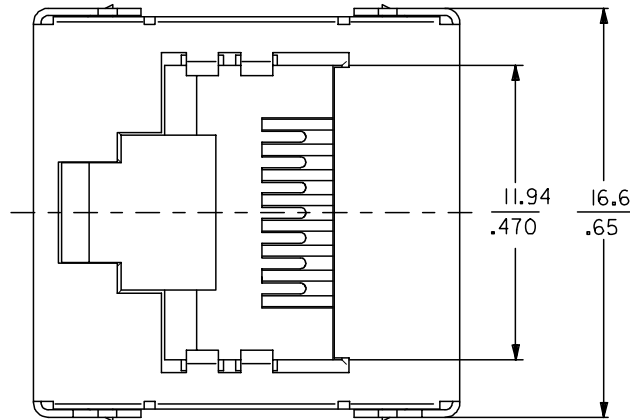

PART NUMBER	TOOLED	PCB THICKNESS
85508-0001	YES	1.57/.062
85508-0002	NO	1.20/.047

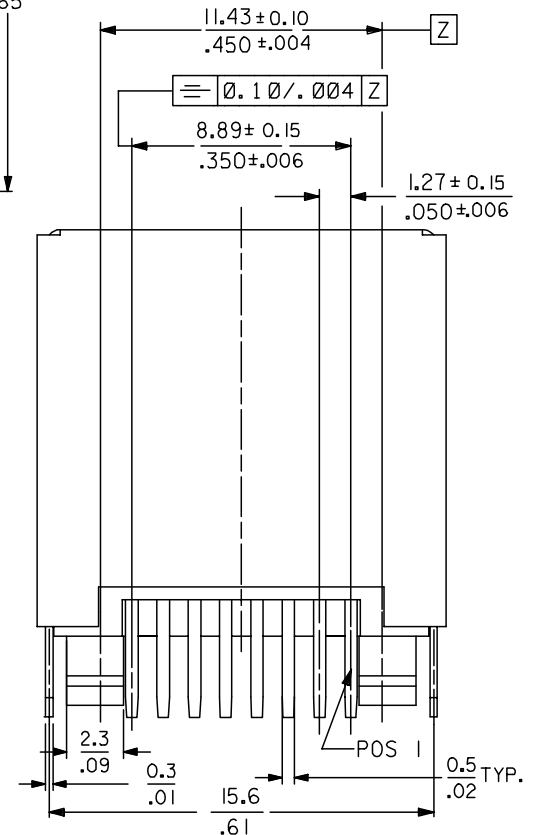

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
EC NO: MG2005-0139		DRAWN BY: HB		mm		DATE: 99/07/07		5:1	METRIC	TITLE: HIGH SPEED MODULAR JACK TOP ENTRY 8 CKTS THROUGH HOLE VERSION	
CHKD:FCARABET		CHECKED BY: DATE:		INCH		APPROVED BY: DATE:				MOLEX INCORPORATED	
APPR:KNOLLER		APPROVED BY: DATE:		4 PLACES ± --- ± ---		MATERIAL NO.				DOCUMENT NO. SD-85508-001	
		3 PLACES ± --- ± .010		2 PLACES ± 0.25 ± .014		SIZE A3				SHEET NO. 1 OF 1	
		1 PLACE ± 0.35 ± ---		ANGULAR ± 2 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							