
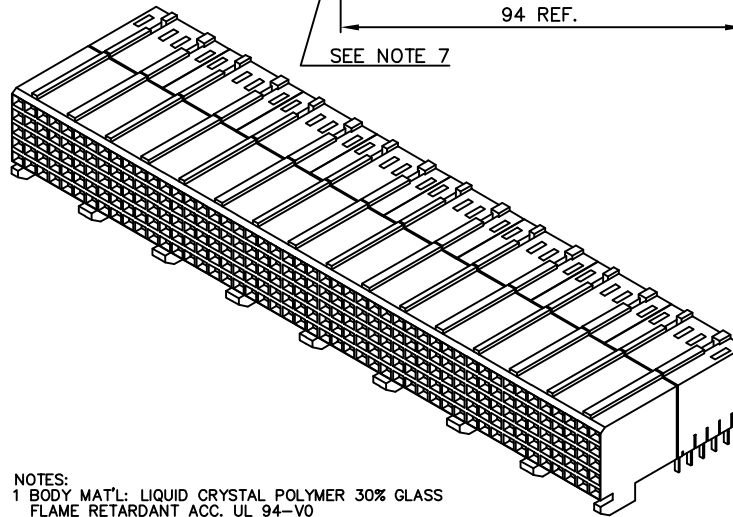
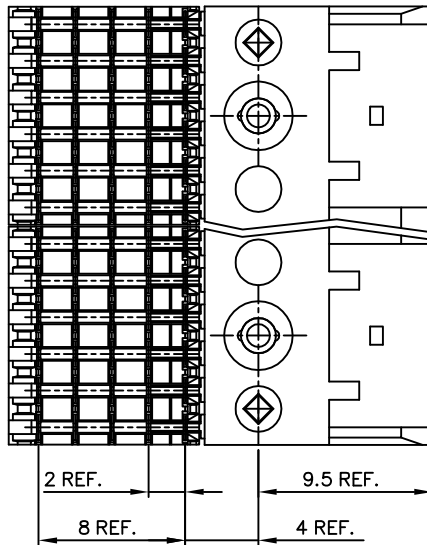
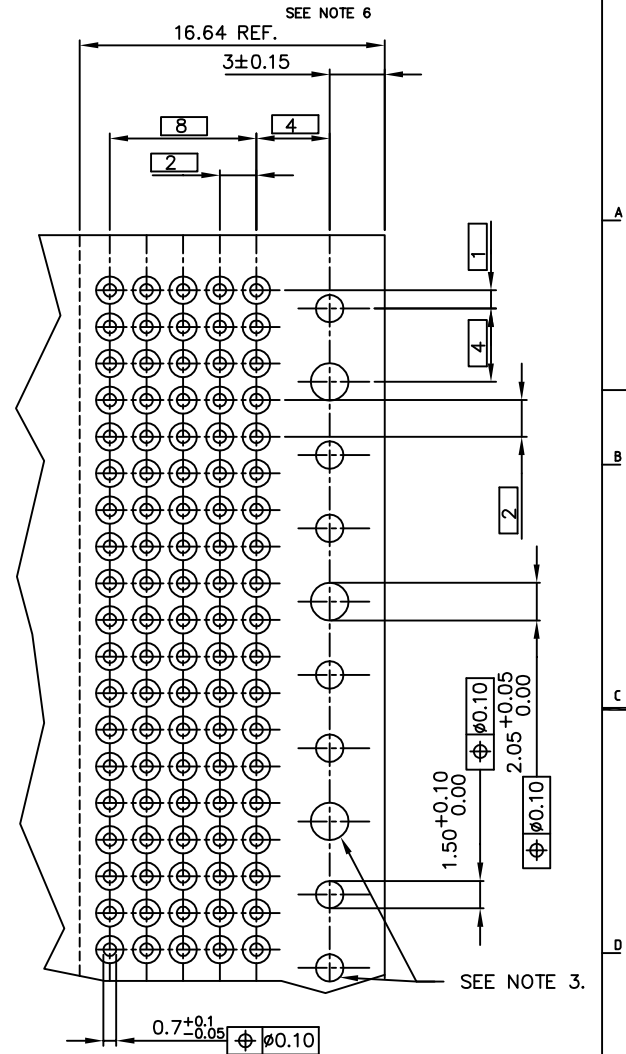
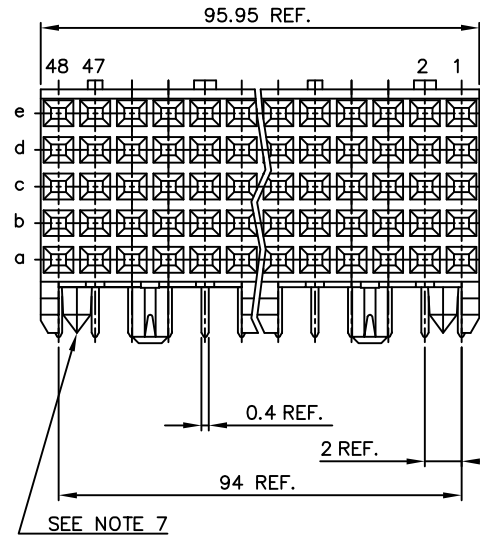


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL:
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL
-9YY/9YYLF	TELCORDIA CO

PC BOARD VERSIONS		
PRODUCT NR:	PCB THICKNESS	DIM A
85866-X02	1.6	2.90
85866-X12	2.4	3.53
85866-X02LF	1.6	2.90
85866-X12LF	2.4	3.53

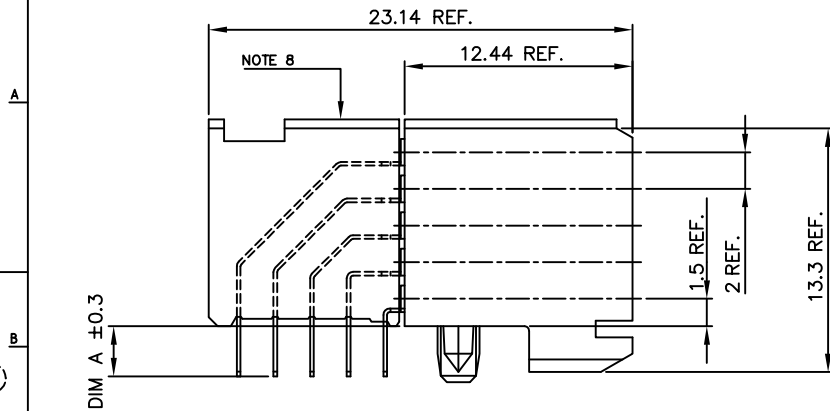

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - INDICATED HOLES ARE UNPLATED.
 - PLATING OF SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn FOR LEAD FREE.
 - PRODUCT MARKING: PART NUMBER & BATCH ID.
 - SET BACK FOR TAIL BLOCK
 - DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
 - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
SEE NOTES									
ltr	ecr	no	dr date	linear		projection		title	
A	H40627	RVI	941005					5 ROW R.A. S.T.B. SIGNAL	
B	V91453	DOB	990902					RECEPT. 96mm MOD. P.P.	
C	V00578	LLA	000316	angles				product family METRAL (tm)	
D	V00850	GNV	000512	dr	R. VISSCHERS	941005			code
E	p004-0100	CLW	041230	engr	E. FEIJEN	941005			213
F	D007-0189	Cent	05/15/07	chr	E. FEIJEN	941005			sheet
G	D008-0171	TER	8/26/08	app	E. FEIJEN	941005			1 of 1
sheet	revision								
index	sheet								

PC BOARD THICKNESS $\approx$ 0.2
(SEE TABLE)