
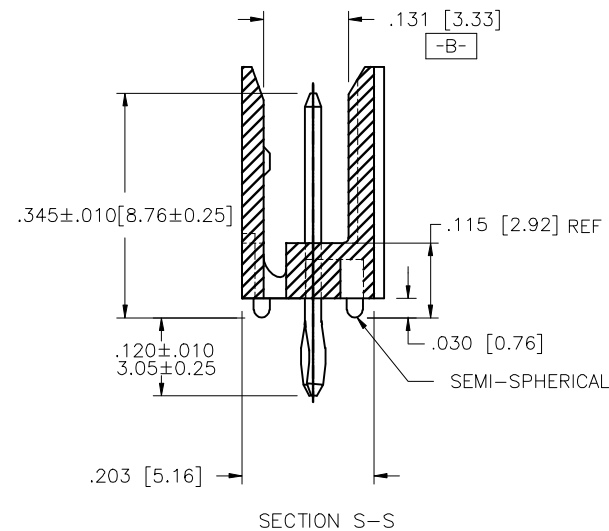
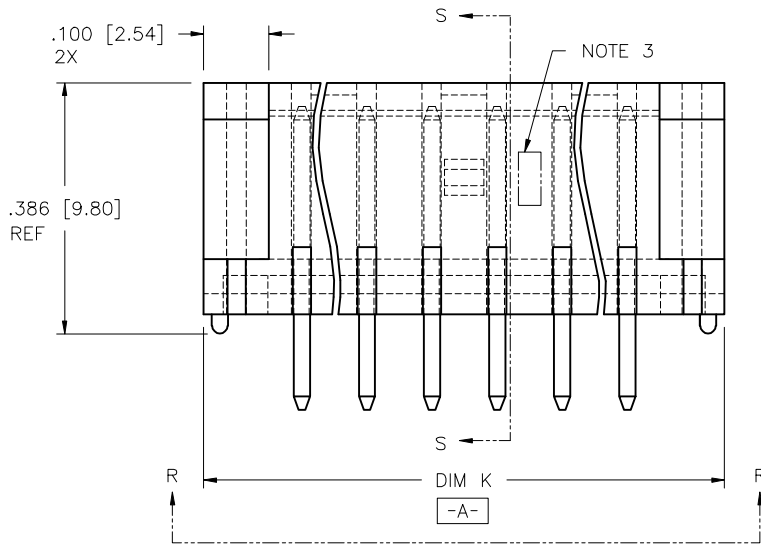
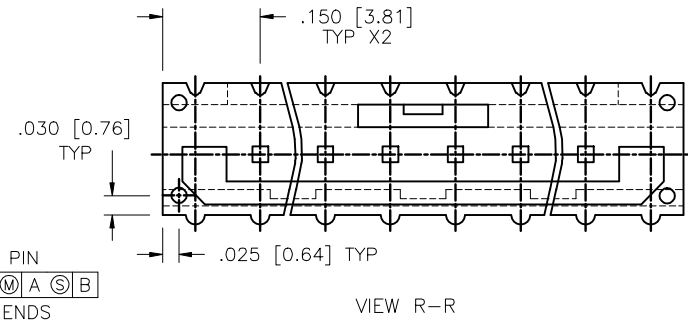
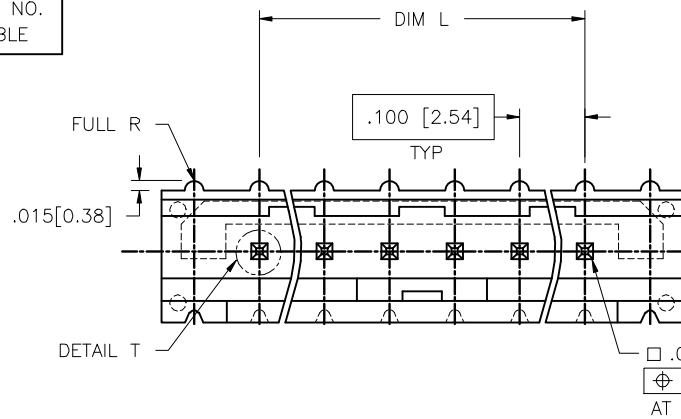





PRODUCT NO.
SEE TABLE



mat'l code				surface ISO 1902		tolerance ISO 406 ISO 1101		projection 		product family CLINCHER				
ltr	ecn no	dr	date	tolerances unless otherwise specified				INCH/MM scale 4:1		title CLINCHER™ LATCH HEADER VERTICAL SELF-RETAINING				
B	V51273	SAR	12/8/95	angles	linear									.XXX±.01/.XXX±0.3
C	V60842	EPK	6/3/96											.XXX±.005/.XXX±0.13
D	V71289	HTB	9/22/97											.XXX±.0020/.XXX±0.05
E	M05-0109	MHT	7/15/05	dr	T.BREWBAKER	5/23/95			dwg no		sheet 1 of 2	size		
F	M06-0052	MHT	1/30/06	engr	T.HANNA	2/17/05			95735		A3			
G	M06-0233	AGS	6/13/06	chr	T.HANNA	2/17/05								
H	M08-0304	MHT	10/16/08	appd	T.HANNA	2/17/05								
sheet index	revision	H	H											
	sheet	1	2											


PRODUCT NUMBER	NO. OF POSITIONS	DIM K ENGLISH	DIM K METRIC	DIM L ENGLISH	DIM L METRIC	RETENTION LEG
NOTE 8						
95735-X02	1 X 2	0.400	10.16	0.100	2.54	NOTE 5
95735-X03	1 X 3	0.500	12.70	0.200	5.08	NOTE 6
95735-X04	1 X 4	0.600	15.24	0.300	7.62	NOTE 7
95735-X05	1 X 5	0.700	17.78	0.400	10.16	
95735-X06	1 X 6	0.800	20.32	0.500	12.70	
95735-X07	1 X 7	0.900	22.86	0.600	15.24	
95735-X08	1 X 8	1.000	25.40	0.700	17.78	
95735-X09	1 X 9	1.100	27.94	0.800	20.32	
95735-X10	1 X 10	1.200	30.48	0.900	22.86	
95735-X11	1 X 11	1.300	33.02	1.000	25.40	
95735-X12	1 X 12	1.400	35.56	1.100	27.94	
95735-X13	1 X 13	1.500	38.10	1.200	30.48	
95735-X14	1 X 14	1.600	40.64	1.300	33.02	
95735-X15	1 X 15	1.700	43.18	1.400	35.56	
95735-X16	1 X 16	1.800	45.72	1.500	38.10	NOTE 7

DASH NO	OVERPLATING	UNDERPLATING
-1YY	30u"/.76u MIN Au OR GXT	50u"/1.27u MIN Ni
-1YYLF		
-4YY	100u"/2.54u MIN PURE TIN	
-4YYLF		

95735-X YY LF
 LEAD FREE OPTION (NOTE 8)
 NO. OF POSITIONS
 PIN PLATING (SEE TABLE)
 BASE PART NUMBER

NOTES:

- MOLDING MATERIAL: HIGH TEMPERATURE PLASTIC FLAME RETARDENT PER UL-94V-0. COLOR: BLACK
- PIN MATERIAL: 3/4 HD PHOS. BRONZE
- LOGO TO BE LOCATED APPROX. AS SHOWN.
- TWO NON-CRITICAL SIDES OF PIN TIP NOT PLATED, BOTH ENDS.
- RETENTION LEGS POS. 1 & 2 RETENTION FEATURE ROTATED 90° FROM THAT SHOWN.
- RETENTION LEGS POS. 1 & 3 RETENTION FEATURE ROTATED 90° FROM THAT SHOWN.
- RETENTION LEGS CENTER 4 POS. ONLY AS SHOWN.
- FOR LEAD FREE OPTION ADD "LF" IN THE END OF THE EXISTING PART NUMBERS.
- IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE
- PLATING OPTIONS: MAYBE EITHER GOLD OR GXT PLATED AT MANUFACTURER CHOICE



SCALE 3/1
RECOMMENDED HOLE PATTERN

mat'l. code	surface	tolerance	projection	product family
ISO 1302	ISO 406	ISO 1101	ISO 1101	CLINCHER
tolerances unless otherwise specified	linear	XX±.01/XX±.03	INCH/MM	title
angles	linear	.XXX±.006/XX±.013	scale 4:1	CLINCHER™ LATCH HEADER
dr	T.BREWBAKER	5/23/95		VERTICAL SELF-RETAINING
engr	T.HANNA	2/17/05		dwg no
chr	T.HANNA	2/17/05		95735
appd	T.HANNA	2/17/05		sheet 2 of 2 size
sheet	revision			A3
index	sheet			type Product Customer Drawing