


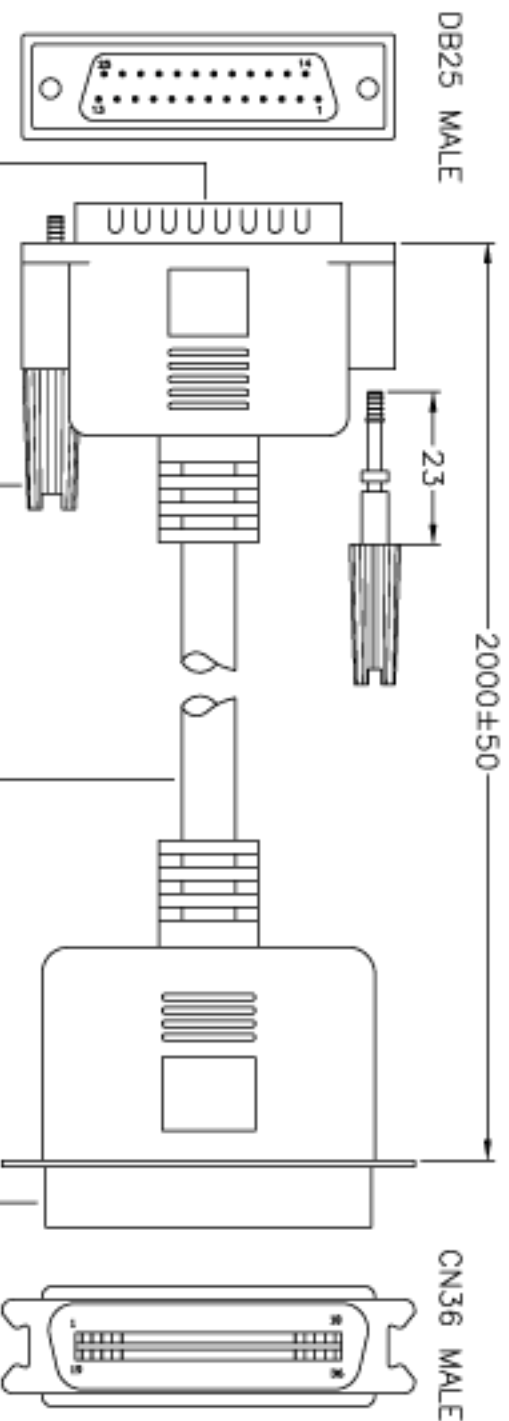

DB25 MALE

CN36 MALE

CONFIGURATION:
DB25M CN36M

1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
SHIELD	SHIELD

- MAT'L:
- 1.CABLE:#28,25C+1+AL/MY,O.D:6.5
 - 2.CONNECTOR:DB25M,BLUE
CN36M,BLUE
 - 3.THUMBSCREW:#4-40UNC,E23
- NOTE:
- 1.TOTAL LENGTH:2000±50mm
 - 2.OCLOR:BEIGE
 - 3.MOLDED TYPE
 - 4.ROHS COMPLIANT

RoHS
Compliant

DATE	29 JUL,2003	PARTS NO	PRO001M	TITLE:	DB25 MALE-CN36 MALE	
UNIT	MM	DRAWN NO	002441	(MOLDED TYPE)		
SCALE		BUYER NO	002	AK108 2M		
ASSMANN ELECTRONICS,INC.						

NO.	DESCRIPTION	QTY
④	THUMBSCREW:#4-40UNC,E23	2
③	#28,25C+1+AL/MY,O.D:6.5	2M
②	CN36M,BLUE	1
①	DB25M,BLUE	1

DRAWN	Y.C.C	CHECK	APPRO
7/29			