



Chip EMIFIL® Inductor Type Chip Ferrite Beads

BLM03B Series (0201 Size)

■ Dimension

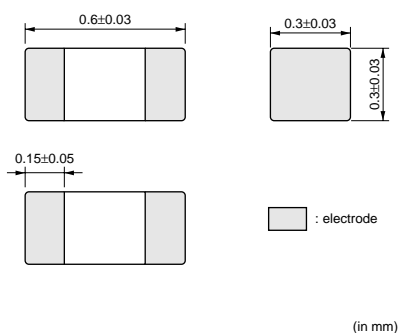

■ Equivalent Circuit

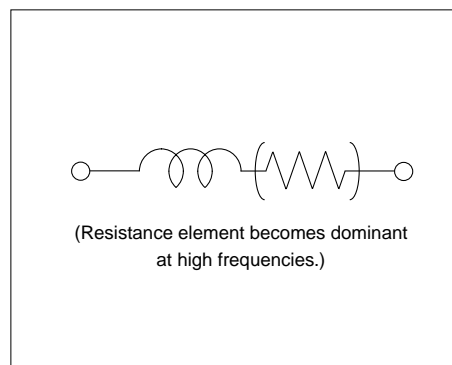

■ Packaging

Code	Packaging	Minimum Quantity
D	180mm Paper Tape	15000
J	330mm Paper Tape	50000
B	Bulk(Bag)	1000

■ Rated Value (□: packaging code)

Part Number	Impedance (at 100MHz/20°C)	Impedance (at 1GHz/20°C)	Rated Current	DC Resistance(max.)	Operating Temperature Range
BLM03BB100SN1□	10ohm±25%	-	300mA	0.4ohm	-55°C to +125°C
BLM03BB220SN1□	22ohm±25%	-	200mA	0.5ohm	-55°C to +125°C
BLM03BB470SN1□	47ohm±25%	-	200mA	0.7ohm	-55°C to +125°C
BLM03BB750SN1□	75ohm±25%	-	200mA	1.0ohm	-55°C to +125°C
BLM03BD750SN1□	75ohm±25%	-	300mA	0.4ohm	-55°C to +125°C
BLM03BB121SN1□	120ohm±25%	-	100mA	1.5ohm	-55°C to +125°C
BLM03BD121SN1□	120ohm±25%	-	250mA	0.5ohm	-55°C to +125°C
BLM03BD241SN1□	240ohm±25%	-	200mA	0.8ohm	-55°C to +125°C
BLM03BD471SN1□	470ohm±25%	-	215mA	1.5ohm	-55°C to +125°C
BLM03BD601SN1□	600ohm±25%	-	200mA	1.7ohm	-55°C to +125°C

Number of Circuits: 1

Continued on the following page.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.


⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.


■ Impedance-Frequency Characteristics (Main)

BLM03BB Series

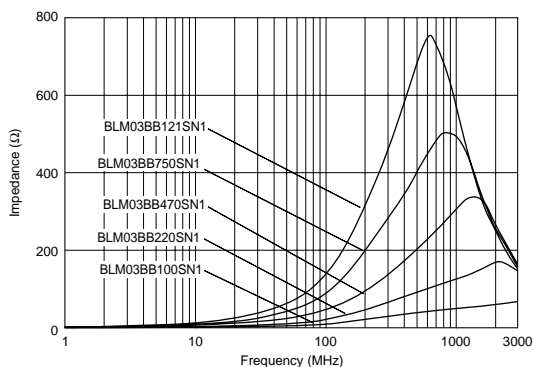


■ Impedance-Frequency Characteristics (Main)

BLM03BD Series

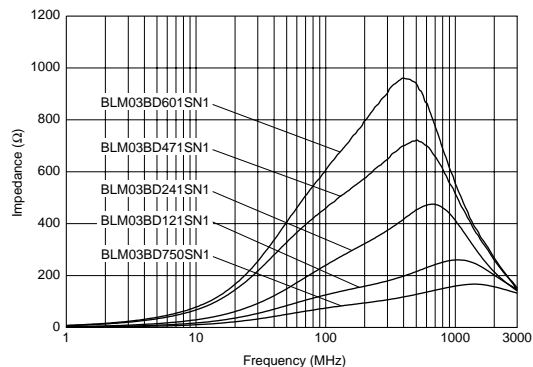


■ Impedance-Frequency Characteristics

BLM03BB100SN1

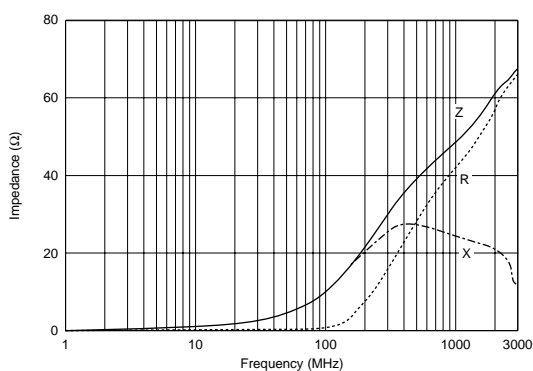


■ Impedance-Frequency Characteristics

BLM03BB220SN1

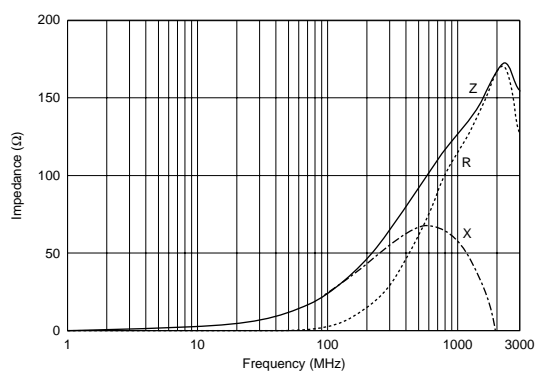


■ Impedance-Frequency Characteristics

BLM03BB470SN1

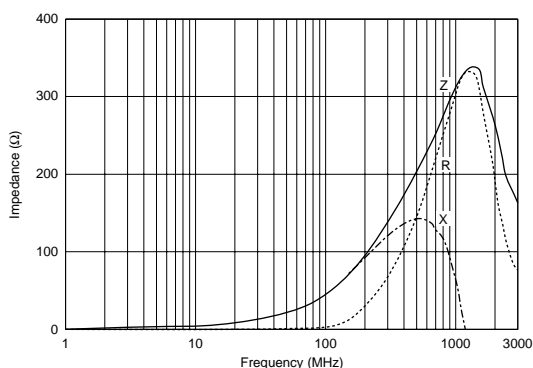

■ Impedance-Frequency Characteristics

BLM03BB750SN1

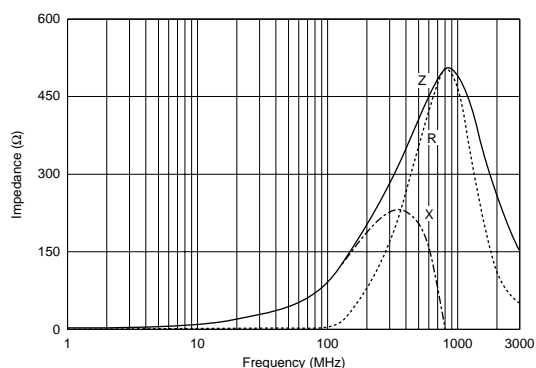

Continued on the following page.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.


⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.


■ Impedance-Frequency Characteristics

BLM03BD750SN1

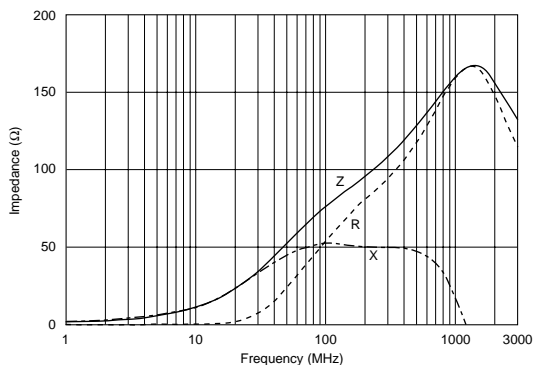


■ Impedance-Frequency Characteristics

BLM03BB121SN1

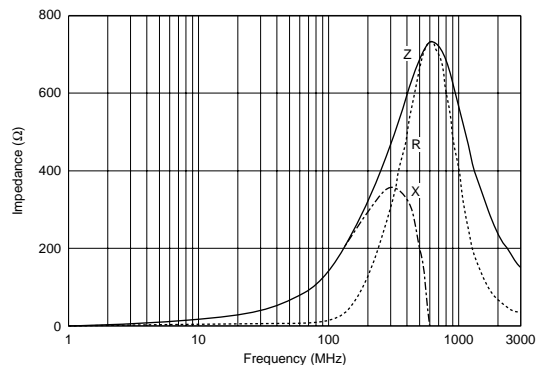


■ Impedance-Frequency Characteristics

BLM03BD121SN1

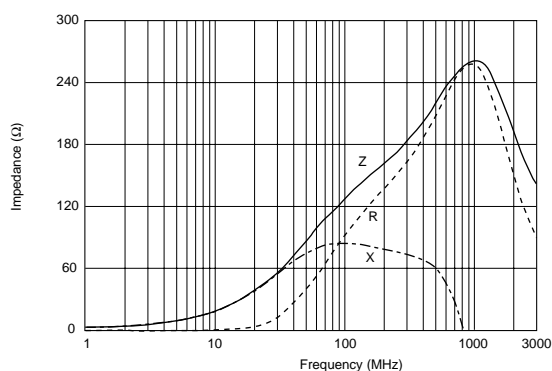


■ Impedance-Frequency Characteristics

BLM03BD241SN1

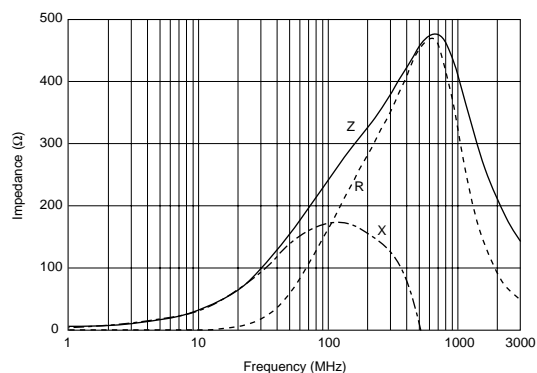


■ Impedance-Frequency Characteristics

BLM03BD471SN1

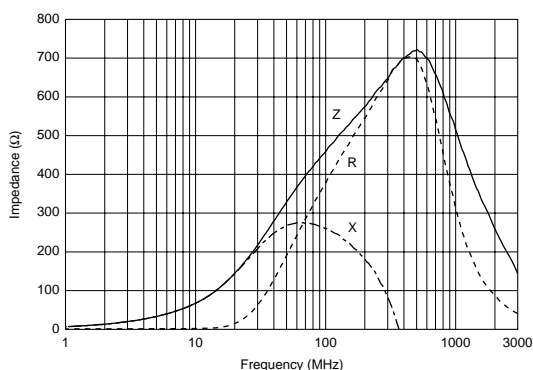

■ Impedance-Frequency Characteristics

BLM03BD601SN1

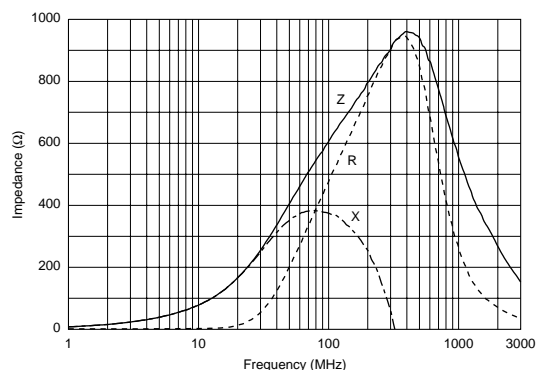


Continued on the following page. ↗

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

 Continued from the preceding page.

■ ⚠ Caution/Notice

⚠ Caution (Rating)

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.

Notice

Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.