



# Chip EMIFIL® Inductor Type for GHz Noise Chip Ferrite Beads

## BLM18H Series (0603 Size)

### ■ Dimension

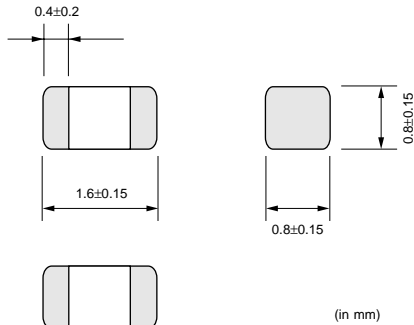

### ■ Equivalent Circuit

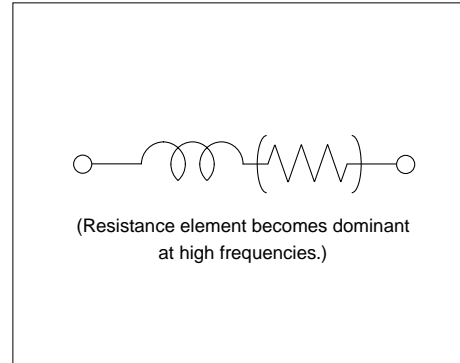

### ■ Packaging

| Code | Packaging        | Minimum Quantity |
|------|------------------|------------------|
| D    | 180mm Paper Tape | 4000             |
| J    | 330mm Paper Tape | 10000            |
| B    | Bulk(Bag)        | 1000             |

### ■ Rated Value (□: packaging code)

| Part Number    | Impedance<br>(at 100MHz/20°C) | Impedance<br>(at 1GHz/20°C) | Rated Current | DC Resistance(max.) | Operating<br>Temperature Range |
|----------------|-------------------------------|-----------------------------|---------------|---------------------|--------------------------------|
| BLM18HG471SN1□ | 470ohm±25%                    | 600ohm(Typ.)                | 200mA         | 0.85ohm             | -55°C to +125°C                |
| BLM18HG601SN1□ | 600ohm±25%                    | 700ohm(Typ.)                | 200mA         | 1.00ohm             | -55°C to +125°C                |
| BLM18HG102SN1□ | 1000ohm±25%                   | 1000ohm(Typ.)               | 100mA         | 1.60ohm             | -55°C to +125°C                |
| BLM18HB121SN1□ | 120ohm±25%                    | 500ohm±40%                  | 200mA         | 0.50ohm             | -55°C to +125°C                |
| BLM18HB221SN1□ | 220ohm±25%                    | 1100ohm±40%                 | 100mA         | 0.80ohm             | -55°C to +125°C                |
| BLM18HB331SN1□ | 330ohm±25%                    | 1600ohm±40%                 | 50mA          | 1.20ohm             | -55°C to +125°C                |
| BLM18HD471SN1□ | 470ohm±25%                    | 1000ohm(Typ.)               | 100mA         | 1.20ohm             | -55°C to +125°C                |
| BLM18HD601SN1□ | 600ohm±25%                    | 1200ohm(Typ.)               | 100mA         | 1.50ohm             | -55°C to +125°C                |
| BLM18HD102SN1□ | 1000ohm±25%                   | 1700ohm(Typ.)               | 50mA          | 1.80ohm             | -55°C to +125°C                |
| BLM18HE601SN1□ | 600ohm±25%                    | 600ohm(Typ.)                | 800mA         | 0.25ohm             | -55°C to +125°C                |
| BLM18HE102SN1□ | 1000ohm±25%                   | 1000ohm(Typ.)               | 600mA         | 0.35ohm             | -55°C to +125°C                |
| BLM18HE152SN1□ | 1500ohm±25%                   | 1500ohm(Typ.)               | 500mA         | 0.50ohm             | -55°C to +125°C                |
| BLM18HK331SN1□ | 330ohm±25%                    | 400ohm±40%                  | 200mA         | 0.50ohm             | -55°C to +125°C                |
| BLM18HK471SN1□ | 470ohm±25%                    | 600ohm±40%                  | 200mA         | 0.70ohm             | -55°C to +125°C                |
| BLM18HK601SN1□ | 600ohm±25%                    | 700ohm±40%                  | 100mA         | 0.90ohm             | -55°C to +125°C                |
| BLM18HK102SN1□ | 1000ohm±25%                   | 1200ohm±40%                 | 50mA          | 1.50ohm             | -55°C to +125°C                |

Number of Circuits: 1

Continued on the following page.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.

### ⚠ Note:


1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

### ■ Notice (Rating)


In operating temperature exceeding +85°C, derating of current is necessary for BLM18HE series.  
Please apply the derating curve shown in chart according to the operating temperature.

### Derating

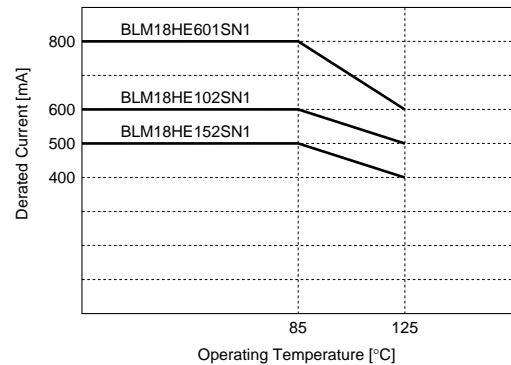


### ■ Impedance-Frequency Characteristics (Main)

#### BLM18HG Series

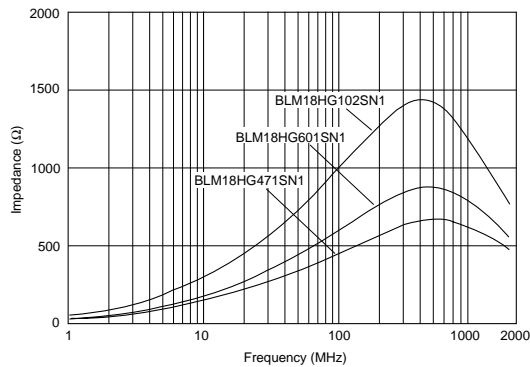


### ■ Impedance-Frequency Characteristics (Main)

#### BLM18HB Series

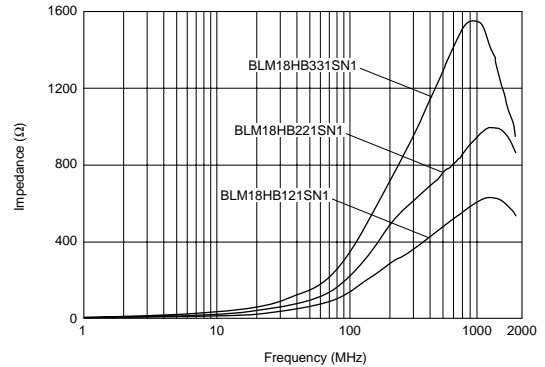


### ■ Impedance-Frequency Characteristics (Main)

#### BLM18HD Series

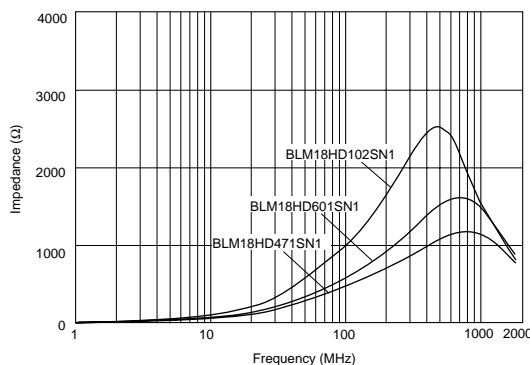

### ■ Impedance-Frequency Characteristics (Main)

#### BLM18HE Series

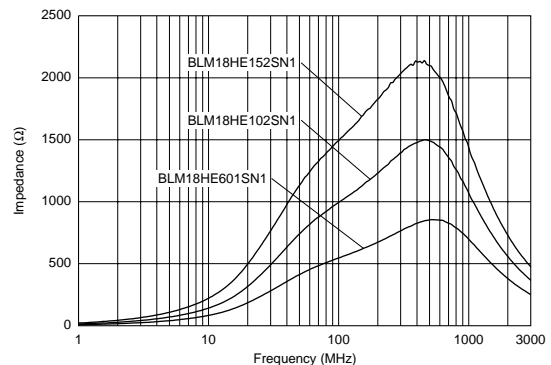

Continued on the following page.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.


### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.


### ■ Impedance-Frequency Characteristics (Main)

#### BLM18HK Series

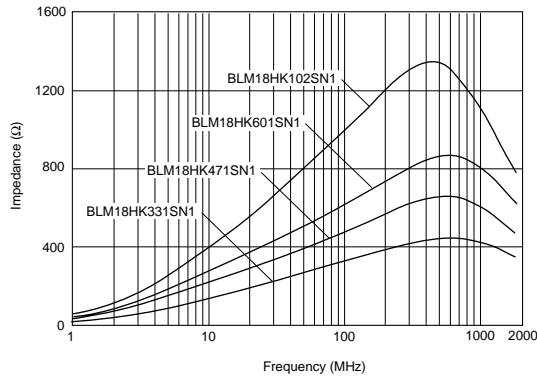


### ■ Impedance-Frequency Characteristics

#### BLM18HG471SN1

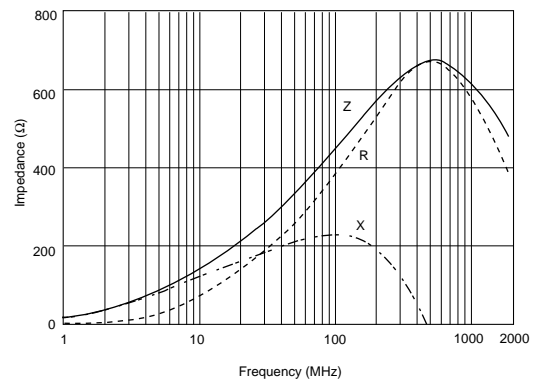


### ■ Impedance-Frequency Characteristics

#### BLM18HG601SN1

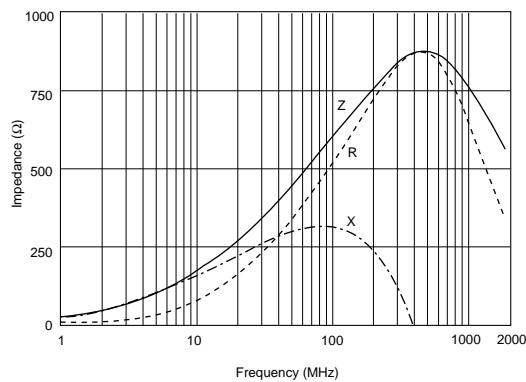


### ■ Impedance-Frequency Characteristics

#### BLM18HG102SN1

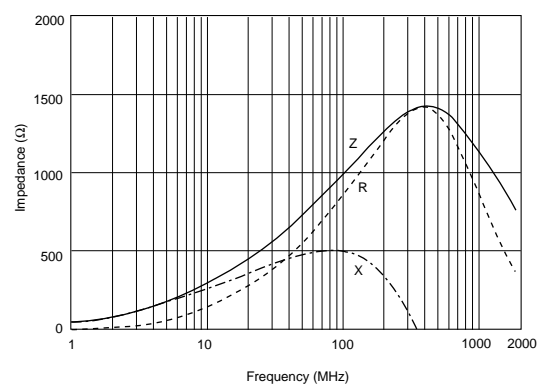


### ■ Impedance-Frequency Characteristics

#### BLM18HB121SN1

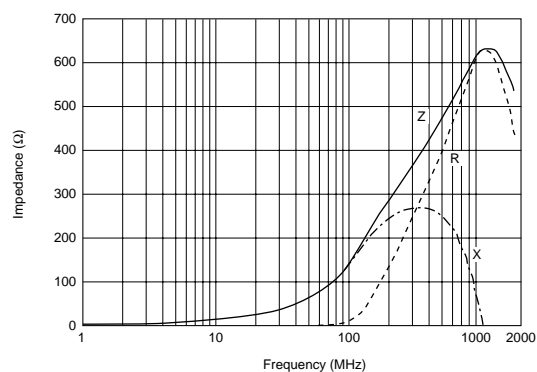

### ■ Impedance-Frequency Characteristics

#### BLM18HB221SN1

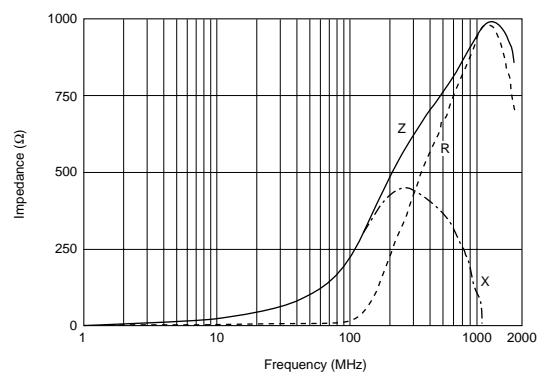

Continued on the following page. ↗

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.


#### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.


### ■ Impedance-Frequency Characteristics

**BLM18HB331SN1**

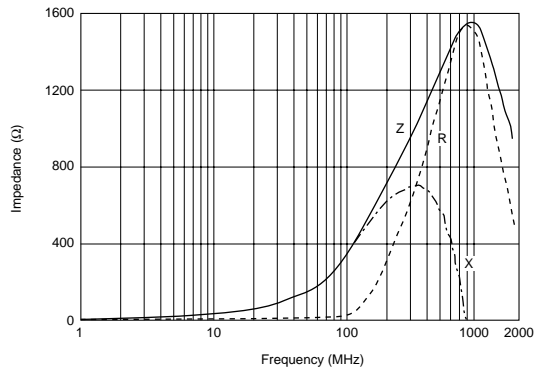


### ■ Impedance-Frequency Characteristics

**BLM18HD471SN1**

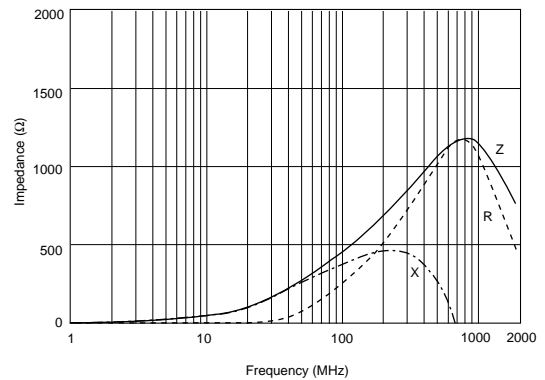


### ■ Impedance-Frequency Characteristics

**BLM18HD601SN1**

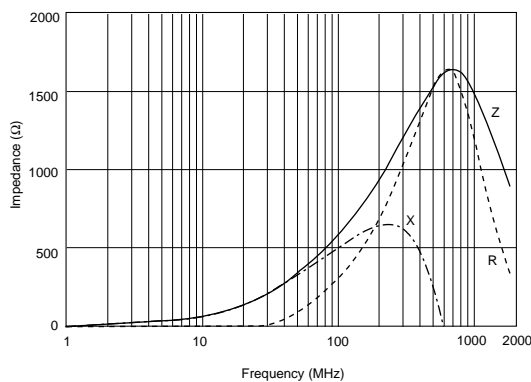


### ■ Impedance-Frequency Characteristics

**BLM18HD102SN1**

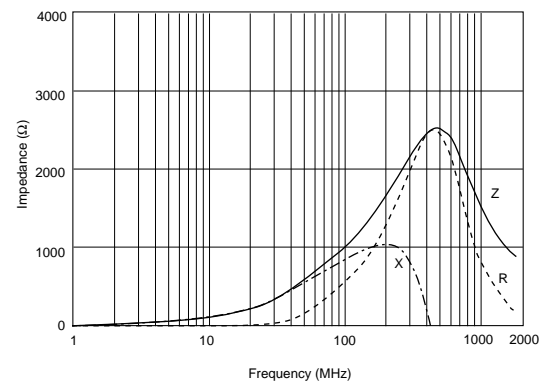


### ■ Impedance-Frequency Characteristics

**BLM18HE601SN1**

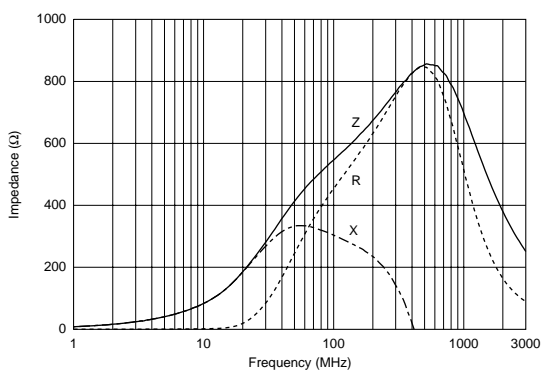

### ■ Impedance-Frequency Characteristics

**BLM18HE102SN1**

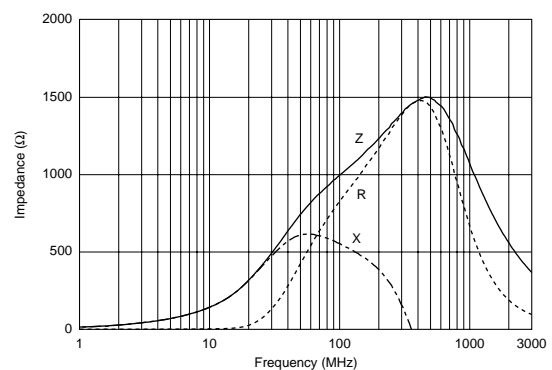

Continued on the following page. ↗

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.


#### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.


### ■ Impedance-Frequency Characteristics

**BLM18HE152SN1**

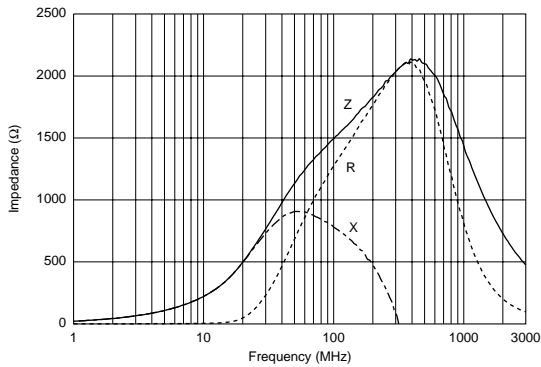


### ■ Impedance-Frequency Characteristics

**BLM18HK331SN1**

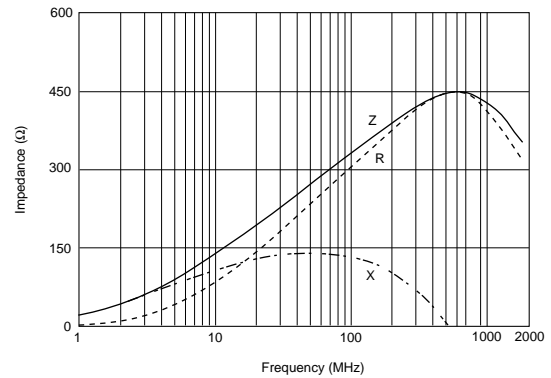


### ■ Impedance-Frequency Characteristics

**BLM18HK471SN1**

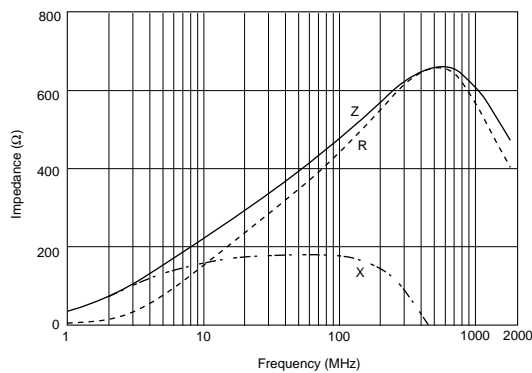


### ■ Impedance-Frequency Characteristics

**BLM18HK601SN1**

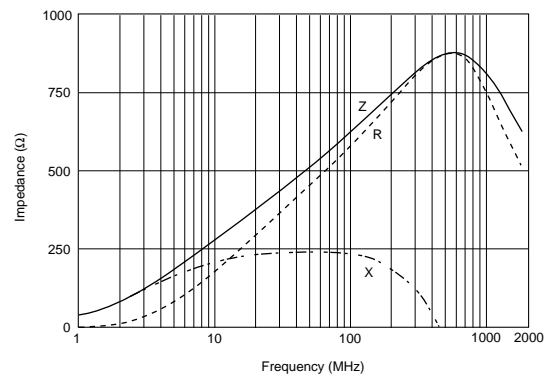

### ■ Impedance-Frequency Characteristics

**BLM18HK102SN1**

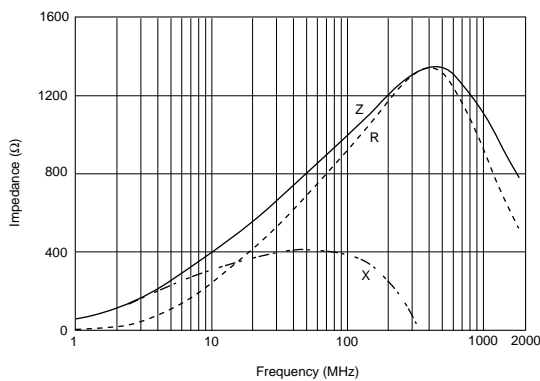


Continued on the following page.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.

#### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

 Continued from the preceding page.

## ■ ⚠ Caution/Notice

### ⚠ Caution (Rating)

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.

### Notice

Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.

### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.